

Job Name/Location:

Tag #:

Date:

For: ☐ File ☐ Resubmit

PO No.:

☐ Approval ☐ Other _____

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

PRLK396A0

Electronic Expansion Valve Kit

for AHU Communications Kit



Electrical:

Power Supply

Powered by AHU Comm Kit (12 VDC)

Environmental Data:

Operating Temperature

-4 -149 °F

Humidity

0-98 % (non-condensing)

Unit Data:

Dimensions (inch)

13-39/64 W x 13-25/32 H x 7-3/32 D

Net Weight (lb)

11

Shipping Weight (lb)

12.1

Communications Cabling Specifications:

Type

Stranded, shielded copper cable

Size

AWG 18 x 6

AWG - American Wire Gauge

Refrigerant

Refrigerant Type

R410A / R32


Capacity:

Maximum AHU Capacity (Btu/h)

384,000

Standard Features:

- Controls refrigerant flow between Multi V air or water source units and a 3rd party air handling unit
- Minimum coil entering temperature is 41°F
- Maximum distance between EEV and Comm kit is 32 feet
- Maximum of (1) EEV kit can be connected to Comm kit
- When brazing to EEV kit, use wet cloth to ensure main EEV body temperature does not exceed 248°F
- Designed for indoor installations (field supplied water-proof enclosure must be used when installing outdoors)
- Includes (1) Pipe In and (1) Pipe Out temperature sensor
- Compatible with PAHCMS000 and PAHCMR000 AHU Communication Kits

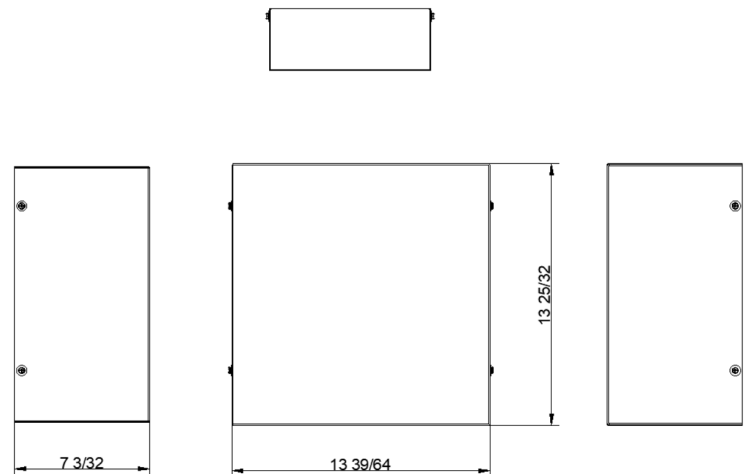

Notes:

1. Must follow installation instructions in the applicable LG installation manual.

PRLK396A0

Electronic Expansion Valve Kit

for AHU Communications Kit



Tag #:

Date:

PO No.:

