Job Name/Location: **Tag No.:**

Date:

For: ☐ File ☐ Resubmit ☐ Approval ☐ Other_____

PO No.:

Architect: **GC:**

Engr: **Mech:**

Rep:
(Company) (Project Manager)

ZRNU423B8AA

R32 Multi V™ High Static Ducted

42,000 Btu/h Indoor Unit

Performance:

Total Cooling Capacity (Btu/h)[1]	42,000
Heating Capacity (Btu/h)[1]	43,800
Max Power Input (W)[2]	800
H/M/L Power Input at Factory Default (W)	528 / 497 / 465

Rated capacity is certified under the latest AHRI Standard 1230. Ratings are subject to change without notice. Current and past certified ratings are available at https://www.ahridirectory.org/

Electrical:

Power Supply (V/Hz/Ø)	208-230 / 60 / 1
Rated Amps (A)	5.2

Piping:

Refrigerant:

Liquid Line (in., O.D.)	3/8 Braze
Vapor Line (in., O.D.)	3/4 Braze

Condensate:

Condensate Pump Drain[3] (in, I.D.)	1
Gravity Drain Plugged (in, O.D.)	1 (3/4 MPT)

Controls Features:

- Auto changeover (Heat Recovery only)
- Auto operation
- Auto restart
- Dual thermistor control
- Dual setpoint control
- Timer (on/off)
- Weekly schedule
- Fan speed control
- Filter life display
- Multiple auxiliary heater applications
- Child lock
- Group control
- Hot start
- Self diagnostics
- External on/off control
- Wi-Fi compatible
- Auto fan
- R32 leak detection sensor

Optional Accessories:

☐ Auxiliary Heater Kit[4] - PRARH1
☐ Wi-Fi Module - PWFMDD200
☐ High Efficiency Filter Box - ZFBXB801A

Controller Options:

☐ MultiSITE™ CRC2* Controllers
☐ Simple Remote Controllers
☐ Standard III Remote Controllers
☐ Deluxe Remote Controllers
☐ Remote Temperature Button Sensor
☐ Dry Contacts

Entering Mixed Air:

Cooling Maximum[1] (°F WB)	76
Heating Minimum (°F DB)	59

Unit Data:

Refrigerant Type	R32
Refrigerant Control	EEV
Sound Pressure[5] dB(A) (H/M/L,@0.24 ESP)	47 / 46 / 43
Sound Power[6] dB(A) (H/M/L,@0.24 ESP)	55 / 54 / 53
Filter Type / Quantity	Washable / 1
Filter Dimensions[7] (in)	16-1/2 x 55 x 1/4
Unit Net / Shipping Weight (lbs.)	192 / 222

Fan:

Fan Type / Quantity	Sirocco / 2
Motor/Drive	Brushless Digitally Controlled / Direct
Motor Quantity	2
Factory Set External Static Pressure (ESP)[8] (in wg)	0.7
Factory Set Airflow Rate H/M/L (CFM)	1,914/1,458/1,123
Airflow Range (CFM)	1.123 - 3.691
Minimum ESP (in wg)[9]	0.23
Maximum ESP (in wg)[9]	0.98

Notes:

1. See Engineering Manual for sensible and latent capacities.
2. Maximum power input is rated at maximum setting value.
3. Maximum lift is 27 inches from bottom of unit. Check valve not included (field supplied).
4. If a Third-Party Dry Contact and an LG internal heater or an LG Auxiliary Heater Kit is installed, supplemental heat capability cannot be controlled by the Third-Party Thermostat.
5. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
6. Sound Power levels are tested in a reverberation chamber under ISO Standard 3741.
7. Actual filter sizes may vary.
8. At factory fan speed setting.
9. Maximum static pressure may result in reduced airflow (CFM).
10. Communication cable between (main) outdoor unit to indoor units/ heat recovery units to be 18 AWG, 2-conductor, twisted, stranded, shielded. Ensure the communication cable shield is properly grounded to the (main) outdoor unit chassis only. ⊘ DO NOT ground the outdoor unit to indoor units / heat recovery units communication cable at any other point. Wiring must comply with all applicable local and national codes.
11. Power wiring is field provided, and must comply with the applicable local and national codes.
12. This unit comes with a dry nitrogen charge.
13. All capacities are net with a combination ratio between 95 – 105%.
14. Must follow installation instructions in the applicable LG installation manual.

For a complete list of available accessories, contact your LG representative.
For continual product development, LG reserves the right to change specifications without notice.
© LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lghvac.com

SB MV IDU HighStaticDucted R32 ZRNU423B8AA 2026 04 08 102431

Job Name/Location: _____

ZRNU423B8AA

R32 Multi V™ High Static Ducted

42,000 Btu/h Indoor Unit

Tag No.: _____

Date: _____

PO No.: _____

Hanging Bolt and Duct Connections for High Static Ducted B8 Units.

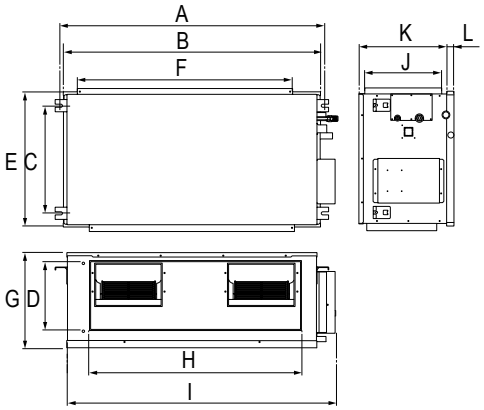

Hanging Bolt and Duct Connection Dimensions for High Static Ducted B8 Units.

Frame	Dimensions (inches)	
B8	A	63-7/8
	B	61-5/8
	C	22-13/16
	D	11-1/2
	E	27-3/8
	F	55-1/8
	G	18-1/8
	H	44-3/16
	I	66-1/8
	J	15-3/8
	K	17-1/2
	L	9/16

High Static Ducted B8 Unit Dimensions.

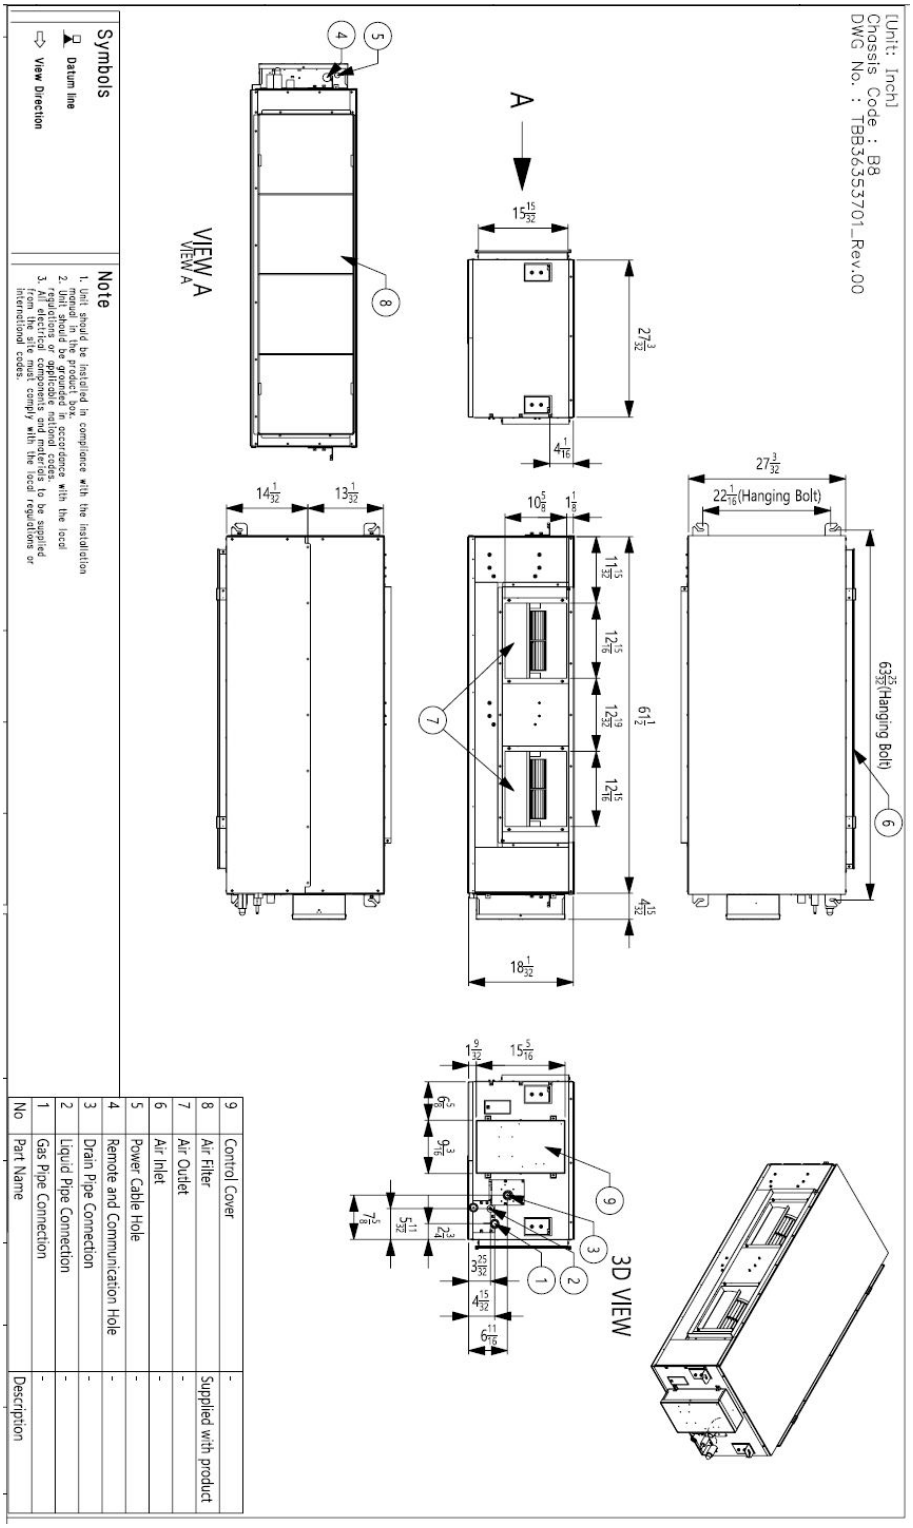

No	Part Name	Description
1	Gas Pipe Connection	-
2	Liquid Pipe Connection	-
3	Drain Pipe Connection	-
4	Remote and Communication Hole	-
5	Power Cable Hole	-
6	Air Inlet	-
7	Air Outlet	-
8	Air Filter	Supplied with product
9	Control Cover	-

For continual product development, LG reserves the right to change specifications without notice.
© LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lghvac.com