

36" Gas Cooktop with UltraHeat™ Burner



- Integrated, Pro-Style Design
- 5 Sealed Burners
- EasyClean® Cooktop
- Dual Stacked UltraHeat™ 24,000 BTU Center Burner (650 BTU Simmer)
- 3 Heavy-Duty Continuous Cast Iron Grates (Dishwasher Safe)
- Illuminated Metal Knobs
- Griddle Plate Included



COLOR AVAILABILITY

- CBGS3628S – PrintProof™ Stainless Steel

COOKTOP FEATURES

Number of Sealed Burners	5
Burner BTU (NG / LP)	
Left Front	10,000 / 7,500
Left Rear	10,000 / 7,500
Center	24,000 / 16,000 (UltraHeat™)
Right Front	13,500 / 14,000
Right Rear	5,000 / 4,000
Griddle Plate	Yes
Continuous Grates	Yes
Dishwasher Safe Grates	Yes
EasyClean® Cooktop	Yes
ADA Compliant	Yes

CONTROLS

Cooktop Control Type	Front, Metal Knob Control
Knob Lighting	Yes (LED)

SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ® Technology	Yes

FINISHES AND APPEARANCE

Cooktop Surface	PrintProof™ Stainless Steel
Knobs	Stainless Steel Appearance

TECHNICAL SPECS

Fuel Type	NG / LP
Required Power Supply	120V, 60 Hz
Minimum Circuit Rating	15 Amp
Power Cord Type	3-Prong Cord Attached to Unit
Gas Supply Location	See Installation Diagram

INCLUDED ACCESSORIES

Griddle Plate, LP Conversion Kit


DIMENSIONS / CLEARANCES / WEIGHTS

Product Dimensions (W x H x D)	36" x 3 3/4" x 21 11/16"
Cutout Dimensions (W x H x D)	33 15/16" x 19 11/16"
Minimum Spacing to Back Wall	2 3/4"
Minimum Spacing to Side Walls	11 13/16"
Minimum Front Countertop Clearance	1 5/8"
Carton Dimensions (W x H x D)	39 29/64" x 9 17/32" x 25 25/64"
Approx. Weight (Product / Carton)	73.86 lbs. / 82.7 lbs.

LIMITED WARRANTY

Parts and Labor	2 Years
-----------------	---------

DIMENSIONS / CLEARANCES

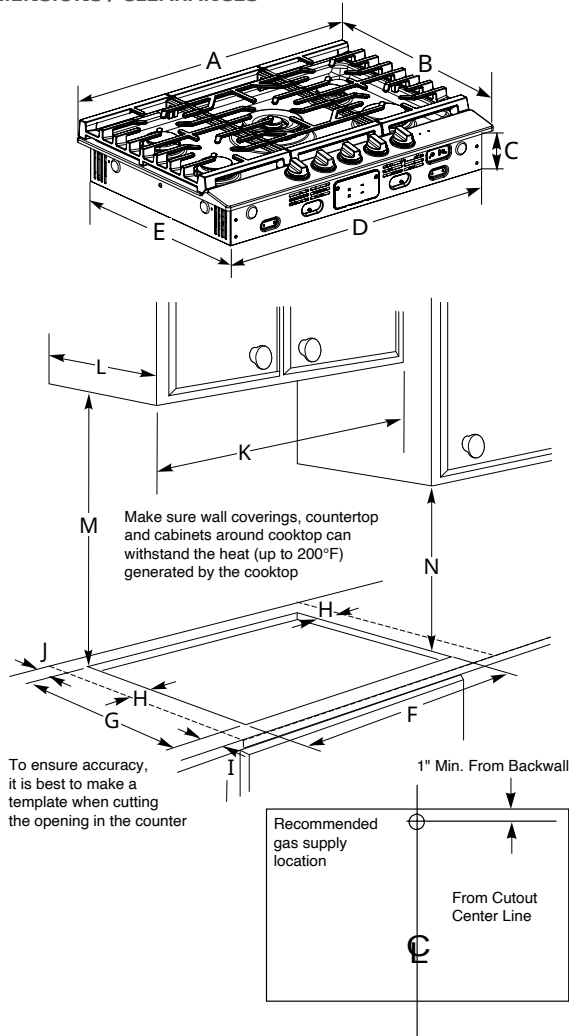

DIMENSIONS / CLEARANCES

A	Width of upper plate	36" (914.4 mm)
B	Depth of upper plate	21 11/16" (550.9 mm)
C	Height of cooktop base	3 3/4" (95.3 mm)
D	Width of cooktop base	33 5/8" (854.1 mm)
E	Depth of cooktop base	19 3/8" (492.1 mm)
F	Width of cutout	33 15/16" (862 mm)
G	Depth of cutout	19 11/16" (500.1 mm)
H	Distance from cutout to side wall on the left of unit. / Distance from cutout to side wall on the right of the unit.	11 13/16" (300 mm)
I	Distance from front edge of cutout to front edge of countertop	1 5/8" (41.3 mm)
J	Distance between cutout and the wall behind the cooktop	2 3/4" (69.9 mm)
K	Width of unprotected overhead cabinets	36" (914.4 mm)
L	Depth of unprotected overhead cabinets	13" (330.2 mm)
M	Clearance from countertop to unprotected overhead surface	30" (762 mm)
N	Clearance from countertop to nearest cabinet on either side of unit	18" (457.2 mm)


INSTALLATION NOTES

- Provide enough clearance between the cooktop and adjacent combustible surfaces. These dimensions must be met for safe use of your cooktop.
- The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements.
- The cooktop may be placed with 2 3/4" clearance to the back wall.


INSTALLATION OF COOKTOP

Locate the electrical outlet and gas shut-off valve beneath the cabinet. Never reuse old flexible connectors. Install a manual shut-off valve ② in the gas line in an easily accessible location outside the cooktop. Be sure you know how and where to shut off the gas supply to the cooktop. Install the electrical outlet 12" ① below the countertop.


Carefully lower the cooktop into the countertop cutout, making sure not to trap any wires.

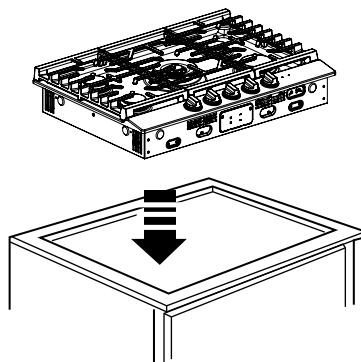

Remove the retainer brackets from the literature package.



Install the retainer brackets ① to the bottom of the cooktop unit ②, then snug the screws ③ against the bottom of the countertop ④ as shown.

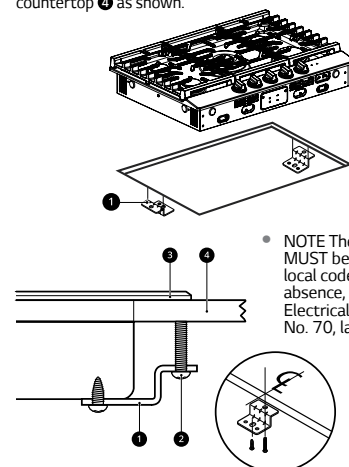

• NOTE The retainer brackets MUST be installed to meet local codes or, in their absence, the National Electrical Code ANSI/NFPA No. 70, latest edition.