
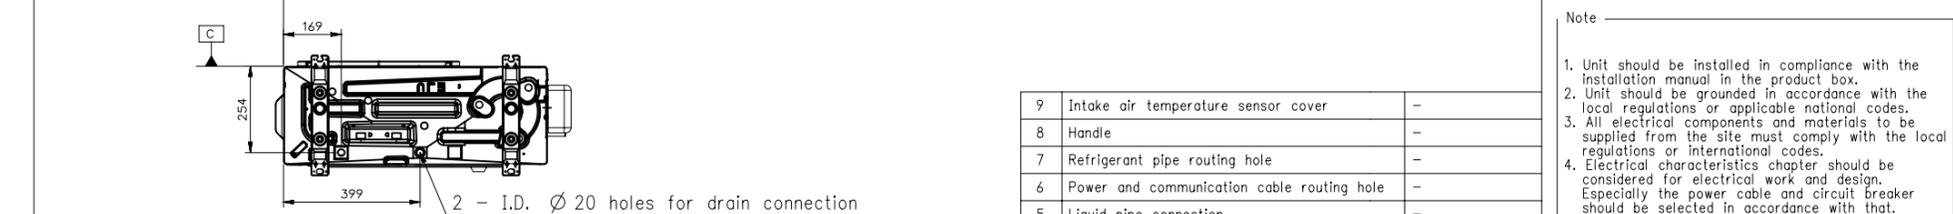
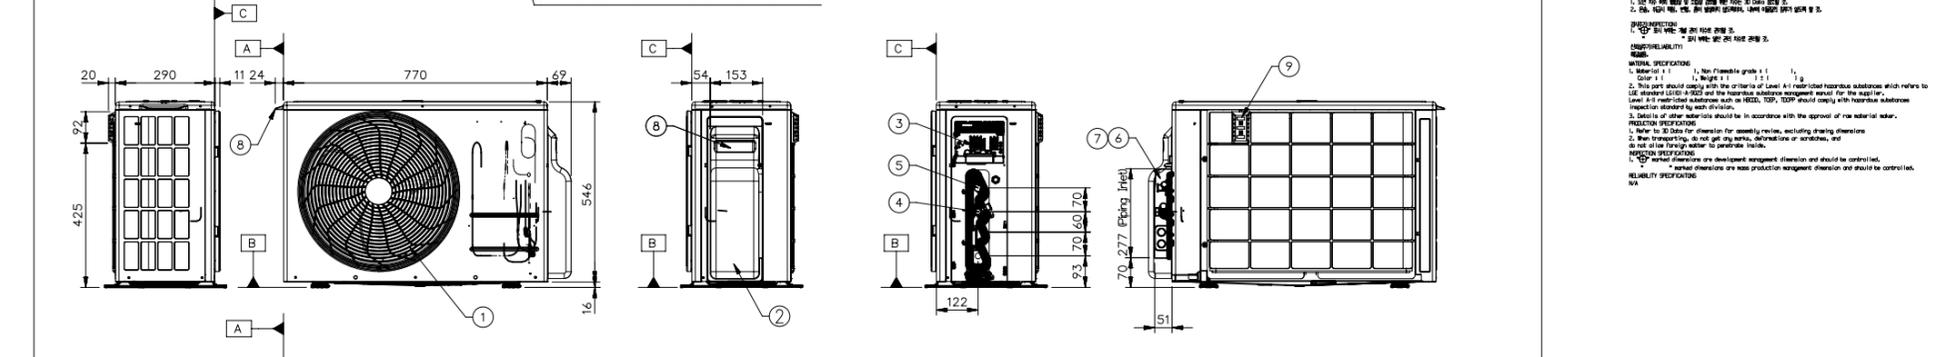


01 Work  
[Unit: mm]  
Model : KUSXB091A, KUSXB121A

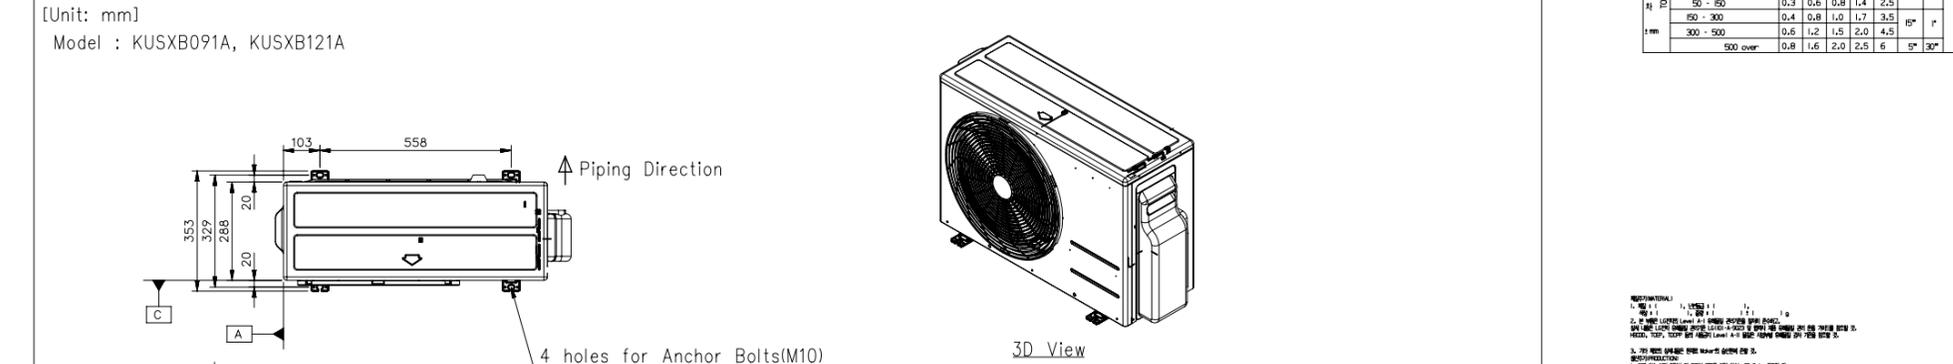




No.	Part Name	Description
9	Intake air temperature sensor cover	-
8	Handle	-
7	Refrigerant pipe routing hole	-
6	Power and communication cable routing hole	-
5	Liquid pipe connection	-
4	Gas pipe connection	-
3	Power and communication cable connection	-
2	Control cover & SVC valve cover	-
1	Air Outlet	-

기호	변경내용	사번	날짜	사명	규격/제조사	양산	확인	단위	SCALE	N/S	TITLE
SYM.	REVISION	ECO. NO.	DATE	SIGNED	Maker	Manufacturer	Confirm	UNITS	mm		Universal Outdoor
△	이작업 길이 단위 추가	EAB0600254	2024-06-19	박해민				DRW/DSN	21/11/09	김영민	MODEL NAME TBW354865(1/2)
△							CHKD	21/11/09	안상민		
△							CHKD	21/11/10	우형택		
△							APPD	21/11/10	황인관		

REVISIONS  
1. 2024.06.19, 박해민, 이작업 길이 단위 추가  
2. 2024.06.19, 박해민, 이작업 길이 단위 추가  
3. 2024.06.19, 박해민, 이작업 길이 단위 추가  
4. 2024.06.19, 박해민, 이작업 길이 단위 추가  
5. 2024.06.19, 박해민, 이작업 길이 단위 추가  
6. 2024.06.19, 박해민, 이작업 길이 단위 추가  
7. 2024.06.19, 박해민, 이작업 길이 단위 추가  
8. 2024.06.19, 박해민, 이작업 길이 단위 추가  
9. 2024.06.19, 박해민, 이작업 길이 단위 추가  
10. 2024.06.19, 박해민, 이작업 길이 단위 추가

Note  
1. Unit should be installed in compliance with the installation manual in the product box.  
2. Unit should be grounded in accordance with the local regulations or applicable national codes.  
3. All electrical components and materials to be supplied from the site must comply with the local regulations or international codes.  
4. Electrical characteristics chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

01 Work  
[Unit: inch]  
Model : KUSXB091A, KUSXB121A

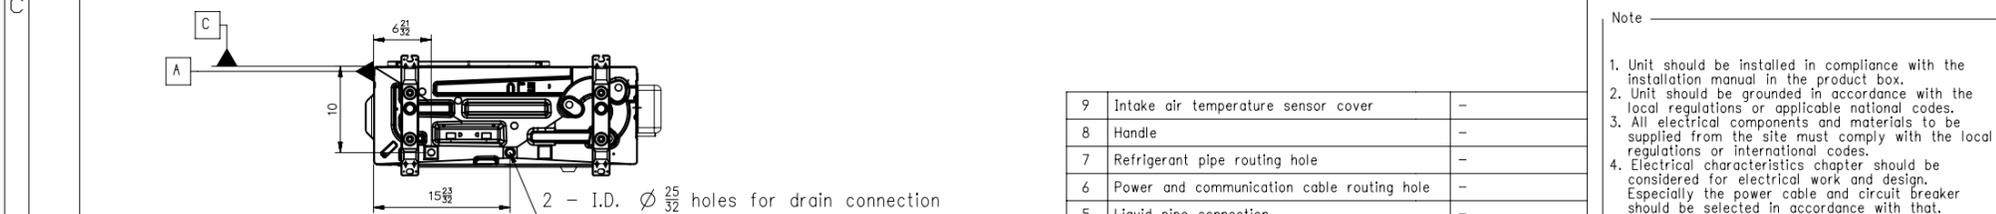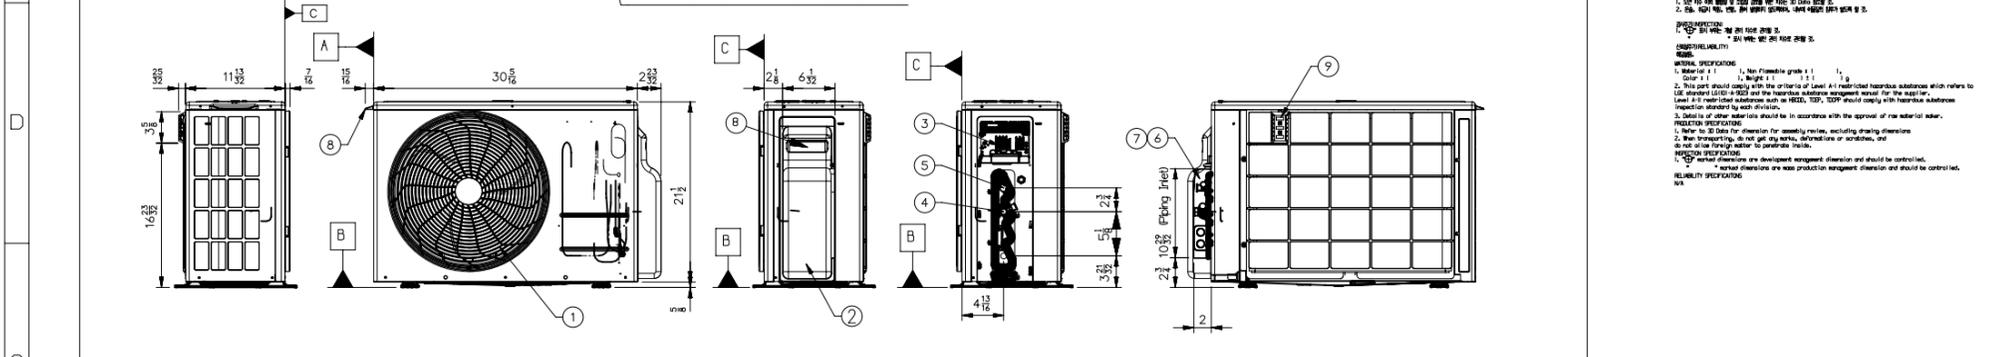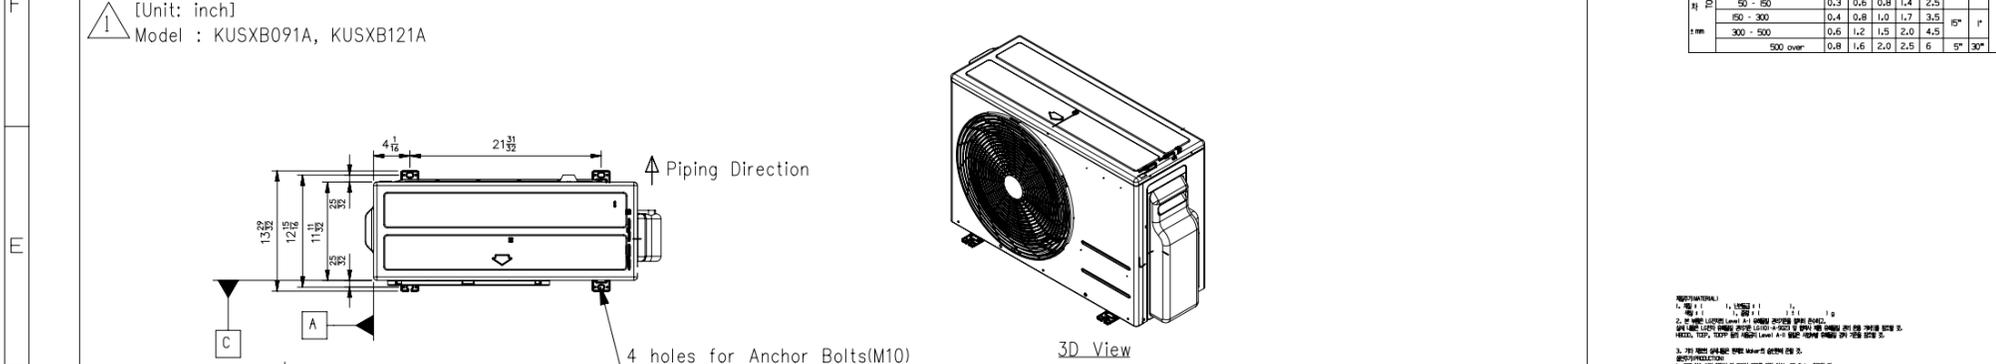

No.	Part Name	Description
9	Intake air temperature sensor cover	-
8	Handle	-
7	Refrigerant pipe routing hole	-
6	Power and communication cable routing hole	-
5	Liquid pipe connection	-
4	Gas pipe connection	-
3	Power and communication cable connection	-
2	Control cover & SVC valve cover	-
1	Air Outlet	-

기호	변경내용	사번	날짜	사명	규격/제조사	양산	확인	단위	SCALE	N/S	TITLE
SYM.	REVISION	ECO. NO.	DATE	SIGNED	Maker	Manufacturer	Confirm	UNITS	mm		Universal Outdoor
△								DRW/DSN	21/11/09	김영민	MODEL NAME TBW354865(2/2)
△							CHKD	21/11/09	안상민		
△							CHKD	21/11/10	우형택		
△							APPD	21/11/10	황인관		

REVISIONS  
1. 2024.06.19, 박해민, 이작업 길이 단위 추가  
2. 2024.06.19, 박해민, 이작업 길이 단위 추가  
3. 2024.06.19, 박해민, 이작업 길이 단위 추가  
4. 2024.06.19, 박해민, 이작업 길이 단위 추가  
5. 2024.06.19, 박해민, 이작업 길이 단위 추가  
6. 2024.06.19, 박해민, 이작업 길이 단위 추가  
7. 2024.06.19, 박해민, 이작업 길이 단위 추가  
8. 2024.06.19, 박해민, 이작업 길이 단위 추가  
9. 2024.06.19, 박해민, 이작업 길이 단위 추가  
10. 2024.06.19, 박해민, 이작업 길이 단위 추가

Note  
1. Unit should be installed in compliance with the installation manual in the product box.  
2. Unit should be grounded in accordance with the local regulations or applicable national codes.  
3. All electrical components and materials to be supplied from the site must comply with the local regulations or international codes.  
4. Electrical characteristics chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.