

Job Name/Location:

Tag No.:

Date:

For: ☐ File ☐ Resubmit

PO No.:

☐ Approval ☐ Other

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

PTVSAA0

Human Detection Sensor


For 4-Way Dual Vane Cassette Units



Features:

- Detects movement within the detection range below.
 - Installation Height 8 feet, 10-5/16 inches (2.7 m): 39 feet, 4-7/16 inches (12 m) x 19 feet, 8-7/32 inches (6 m).
 - Installation Height 10 feet, 5-31/32 inches (3.2 m): 49 feet, 2-9/16 inches (15 m) x 26 feet, 2-31/32 inches (8 m).
- On / Off Power Saving mode allows indoor unit to turn off if no movement is detected.
- Temperature Power saving mode gradually changes setpoint before turning the unit off.
 - The incremental setpoint change time can be set to 5, 10, 15, 30, 60, or 90 minutes.
- Direct Wind Controller Setting: When motion is detected, airflow is automatically directed towards occupants.
- Indirect Wind Controller Setting: When motion is detected, airflow is automatically directed away from occupants.
- Installs on the right corner of the panel.


Back of Human Detection Sensor



Note:

Sensor installation position is adjustable based on the application conditions.

Location of Human Detection Sensor on Ceiling-Cassette Panel

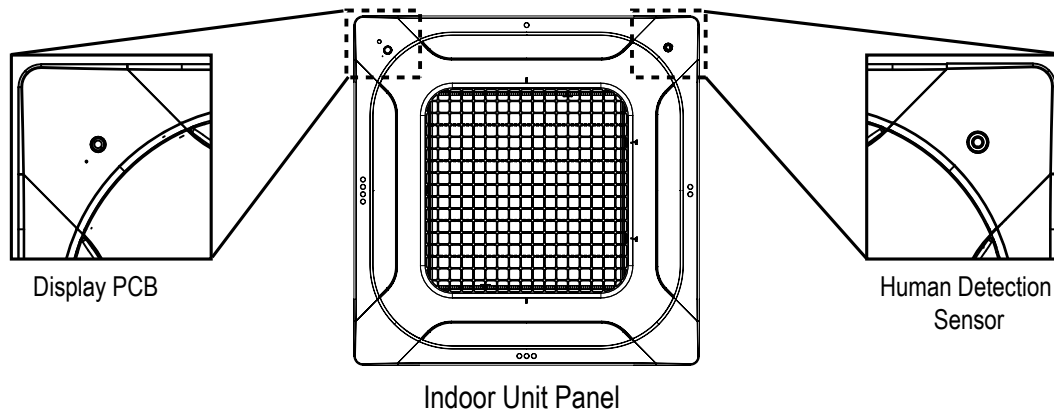

Note:

Follow installation instructions in the applicable LG installation manual.