

# OLED 4K UHD Smart Hotel TV with Pro:Centric Hotel Management Solutions









Game Optimizer





AM960H Series		77/65/55AM960H0UD	
Design	Stand Type	2 poles	
Display	Inch	77" / 65" / 55"	
	Resolution	3,840 × 2,160 (4K UHD)	
Broadcasting System	Digital	ATSC / Clear QAM	
	Analog	NTSC	
VESA		77" / 65" / 55" : 300 × 200 mm	



### LG OLED Self-lit Pixels

LG Hospitality TV is unique thanks to its self-lit technology. Millions of OLED pixels come together to deliver the next level of TV. Enjoy the deep black, the rich colors and the vivid picture quality.



### Pro:Centric Direct

The hotel content management solution Pro:Centric Direct offers easy and simple editing tools, making it easy to perform service and IP network-based remote management with a single click. The Pro:Centric Direct solution enables users to edit their interface easily by providing customized interface and efficiently manages all TVs in the room. The latest PCD version provides IoT-based inroom control as well as voice control function through LG Natural Language Processing (NLP). These IoT and voice-related functions will be your starting point to prepare for the hotel rooms of next generation through artificial intelligence.

\* Some features may not be supported based on PCD versions.



# Casting Capable

With Apple AirPlay® and Google Cast™, guests can cast content directly to this LG Pro:Centric Smart Hotel TV, right from their favorite wireless devices. Whether it's to watch movies and shows from their favorite apps or share what's on their devices, including photos, personal videos, games and more, guests view what they want, when they want. They simply and securely pair their device directly to the guestroom TV once for the duration of their stay.



### Netflix Included

Experience a wide variety of video content from Netflix on AM960H with Pro:Centric Direct. Enjoy the comfort of your room and a streaming service that offers a thousands of selections.

\* Netflix membership required.




## Game Optimizer

LG Game Optimizer will get you and keep you in the action through selection of game mode, picture adjustment and other settings.

### CONNECTIVITY

### 77" / 65" / 55"


### Rear

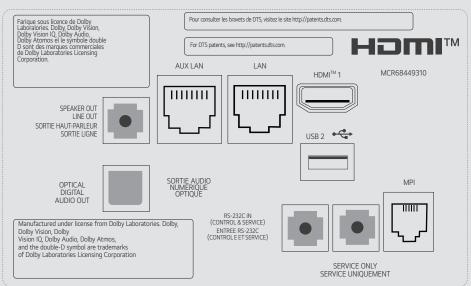



### Side



# **DIMENSIONS**

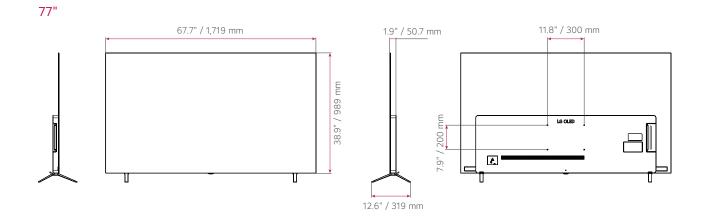

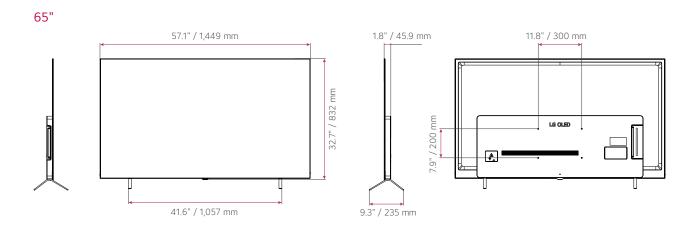

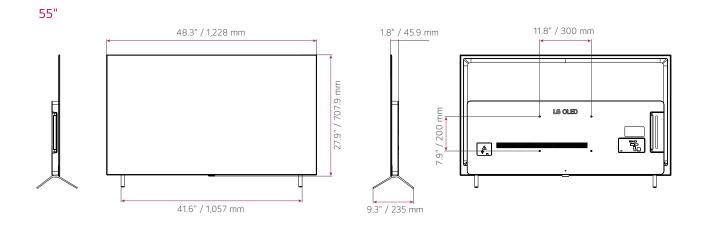

### **SPECIFICATIONS**

		77AM960H0UD	65AM960H0UD	55AM960H0UD
Info	Category	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart
	Stand Type	2 poles	2 poles	2 poles
Design	Front Color	OLED (4 Side Cinema Screen)	OLED (4 Side Cinema Screen)	OLED (4 Side Cinema Screen)
Display	Size (Inch)	77"	65"	55"
	Resolution	3,840 × 2,160 (4K Ultra HD)	3,840 × 2,160 (4K Ultra HD)	3,840 × 2,160 (4K Ultra HD)
	Brightness (Typ.)	150 nits (APL 100% (Full White)) 500 nits (APL 25% (Full White))	150 nits (APL 100% (Full White)) 500 nits (APL 25% (Full White))	150 nits (APL 100% (Full White)) 500 nits (APL 25% (Full White))
Video	Al Picture Pro	Yes	Yes	Yes
	HDR 10 Pro / HDR HLG	Yes / Yes	Yes / Yes	Yes / Yes
	Game Optimizer	Yes	Yes	Yes
Audio (Sound)	Speaker (Audio Output)	20 W	20 W	20 W
	Al Sound	Yes	Yes	Yes
	Al Acoustic Tuning	Yes	Yes	Yes
	LG Sound Sync	Yes	Yes	Yes
Broadcasting System	Digital	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM
	Analog (NTSC / SECAM / PAL)	NTSC	NTSC	NTSC
Hospitality Solution	Solution Type	Pro:Centric (Smart, Cloud, Direct, V, Server), Quick Menu (Customizable Portal)	Pro:Centric (Smart, Cloud, Direct, V, Server), Quick Menu (Customizable Portal)	Pro:Centric (Smart, Cloud, Direct, V, Server), Quick Menu (Customizable Portal)
	Pro:Idiom (DRM / Media)	Yes / Yes	Yes / Yes	Yes / Yes
Smart Function	Blue EZ-Manager, USB Cloning,	tooth Audio Playback, HDMI-eARC/ARC Wake on RF, WOL, Diagnostics (IP Remo	Multi-View, AOD, Gallery Mode, Wi-Fi, Blu (HDMI 2), Voice Recognition (Standalone ote), Simplink (HDMI-CEC (1.4)), IR Out (F	e / Solution), IoT RS-232C, MPI), Multi-code IR, Installe
Hospitality Feature	EZ-Manager, USB Cloning, Menu, One Channel Map (	tooth Audio Playback, HDMÍ-eARC/ARC Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi	(HDMI 2), Voice Recognition (Standalone	e / Solution), IoT RS-232C, MPI), Multi-code IR, Installe Ide (Limited), RJP (Remote Jack Pack
	EZ-Manager, USB Cloning, Menu, One Channel Map (	wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter	(HDMI 2), Voice Recognition (Standalone ote), Simplink (HDMI-CEC (1.4)), IR Out (F Instant ON, VLAN ID, Port Block, Lock Mo ng Mode, BEACON, Video Tag (2 Video)	e / Solution), IoT RS-232C, MPI), Multi-code IR, Installe ide (Limited), RJP (Remote Jack Pack ernet, Aux)), RS-232C (3.5 mm), Serv
Hospitality Feature	EZ-Manager, USB Cloning, Menu, One Channel Map (	tooth Audio Playback, HDMI-eARC/ARC Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5	the control of the co	e / Solution), IoT RS-232C, MPI), Multi-code IR, Installe de (Limited), RJP (Remote Jack Pack
Hospitality Feature	EZ-Manager, USB Cloning, Menu, One Channel Map ( HDMI In (x3), USB 2.0 (x2),	tooth Audio Playback, HDMÍ-eARC/ARC Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5	thom 2), Voice Recognition (Standalone), Simplink (HDMI-CEC (1.4)), IR Out (Finstant ON, VLAN ID, Port Block, Lock Mong Mode, BEACON, Video Tag (2 Video) and Speaker Out (3.5 mm), RJ45 (x2, Ethemm), MPI Port (RJ12)	e / Solution), IoT RS-232C, MPI), Multi-code IR, Installe ide (Limited), RJP (Remote Jack Pack ernet, Aux)), RS-232C (3.5 mm), Serv
Hospitality Feature	EZ-Manager, USB Cloning, Menu, One Channel Map ( HDMI In (x3), USB 2.0 (x2), VESA Compatible Dimensions Without Stand	tooth Audio Playback, HDMÍ-eARC/ARC  Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi  RF In, Digital Audio Out (Optical), Exter Only (3.5)  300 × 200  67.8 × 38.9 × 2.0 in.	the content of the co	RS-232C, MPI), Multi-code IR, Installe de (Limited), RJP (Remote Jack Pack Pack Pack), RS-232C (3.5 mm), Serv 300 × 200 48.3 × 27.9 × 1.8 in.
Hospitality Feature  Connectivity	EZ-Manager, USB Cloning, Menu, One Channel Map ( HDMI In (x3), USB 2.0 (x2), VESA Compatible Dimensions Without Stand (W x H x D) Dimensions With Stand	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5 300 × 200 67.8 x 38.9 x 2.0 in. 1,719 × 989 × 50.9 mm 67.8 x 41.6 x 12.6 in.	thom 2), Voice Recognition (Standalone)  te), Simplink (HDMI-CEC (1.4)), IR Out (Finstant ON, VLAN ID, Port Block, Lock Mong Mode, BEACON, Video Tag (2 Video)  nal Speaker Out (3.5 mm), RJ45 (x2, Ethemm), MPI Port (RJ12)  300 × 200  57.1 x 32.8 x 1.8 in.  1,449 × 832 × 45.9 mm  57.1 x 35.3 x 9.3 in.	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature	EZ-Manager, USB Cloning, Menu, One Channel Map (  HDMI In (x3), USB 2.0 (x2),  VESA Compatible  Dimensions Without Stand (W x H x D)  Dimensions With Stand (W x H x D)  Shipping Dimensions	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in.	thom 2), Voice Recognition (Standalone)  te), Simplink (HDMI-CEC (1.4)), IR Out (Finstant ON, VLAN ID, Port Block, Lock Mong Mode, BEACON, Video Tag (2 Video)  nal Speaker Out (3.5 mm), RJ45 (x2, Ethemm), MPI Port (RJ12)  300 × 200  57.1 × 32.8 × 1.8 in.  1,449 × 832 × 45.9 mm  57.1 × 35.3 × 9.3 in.  1,449 × 896 × 235 mm  62.9 × 37.4 × 6.8 in.	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature  Connectivity	EZ-Manager, USB Cloning, Menu, One Channel Map ( HDMI In (x3), USB 2.0 (x2),  VESA Compatible Dimensions Without Stand (W x H x D) Dimensions With Stand (W x H x D) Shipping Dimensions (W x H x D)	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5) 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm	te (HDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Implied the Charles), Implied the Charles of	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Packernet, Aux)), RS-232C (3.5 mm), Servernet, Aux)), RS-233C (3.5 mm), RS-23C (
Hospitality Feature  Connectivity	EZ-Manager, USB Cloning, Menu, One Channel Map (  HDMI In (x3), USB 2.0 (x2),  VESA Compatible  Dimensions Without Stand (W x H x D)  Dimensions With Stand (W x H x D)  Shipping Dimensions (W x H x D)  Weight without Stand	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5) 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg	te (HDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Implied the	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature  Connectivity	EZ-Manager, USB Cloning, Menu, One Channel Map (  HDMI In (x3), USB 2.0 (x2),  VESA Compatible  Dimensions Without Stand (W x H x D)  Dimensions With Stand (W x H x D)  Shipping Dimensions (W x H x D)  Weight without Stand  Weight with Stand	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5) 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg	tel, Simplink (HDMI-CEC (1.4)), IR Out (Flinstant ON, VLAN ID, Port Block, Lock Mong Mode, BEACON, Video Tag (2 Video)  nal Speaker Out (3.5 mm), RJ45 (x2, Ethemm), MPI Port (RJ12)  300 × 200  57.1 x 32.8 x 1.8 in. 1,449 × 832 × 45.9 mm  57.1 x 35.3 x 9.3 in. 1,449 × 896 × 235 mm  62.9 x 37.4 x 6.8 in. 1,600 × 950 × 172 mm  37.7 lbs. / 17.1 kg  38.1 lbs. / 17.3 kg	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Packernet, Aux)), RS-232C (3.5 mm), Servernet, Aux), RS-232C (3.5 mm), RS-232C
Hospitality Feature  Connectivity	EZ-Manager, USB Cloning, Menu, One Channel Map (  HDMI In (x3), USB 2.0 (x2),  VESA Compatible  Dimensions Without Stand (W x H x D)  Dimensions With Stand (W x H x D)  Shipping Dimensions (W x H x D)  Weight without Stand  Weight with Stand  Shipping Weight  On Bezel Width	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5) 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg 51.8 lbs. / 23.5 kg	te (HDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Implied the	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature  Connectivity	EZ-Manager, USB Cloning, Menu, One Channel Map ( HDMI In (x3), USB 2.0 (x2), VESA Compatible Dimensions Without Stand (W x H x D) Dimensions With Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/T/B) Off Bezel Width	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5) 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg 51.8 lbs. / 23.5 kg 73.8 lbs. / 33.5 kg	te (HDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), IR Out (Foundation of th	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature  Connectivity	EZ-Manager, USB Cloning, Menu, One Channel Map ( HDMI In (x3), USB 2.0 (x2), VESA Compatible Dimensions Without Stand (W x H x D) Dimensions With Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/T/B) Off Bezel Width (L/R/T/B) Power Supply (Voltage,	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5) 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg 51.8 lbs. / 23.5 kg 73.8 lbs. / 33.5 kg	2 (HDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Foundation of the Charles), IR Out (Foundation of the	2 / Solution), IoT  RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature  Connectivity  Mechanical	EZ-Manager, USB Cloning, Menu, One Channel Map (  HDMI In (x3), USB 2.0 (x2),  VESA Compatible  Dimensions Without Stand (W x H x D)  Dimensions With Stand (W x H x D)  Shipping Dimensions (W x H x D)  Weight without Stand  Weight with Stand  Shipping Weight  On Bezel Width (L/R/T/B)  Off Bezel Width (L/R/T/B)  Power Supply (Voltage, Frequency)  Power Consumption	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5) 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg 51.8 lbs. / 23.5 kg 73.8 lbs. / 33.5 kg 11.0 / 11.0 / 12.4 / 16.7 mm	CHDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Flinstant ON, VLAN ID, Port Block, Lock Mong Mode, BEACON, Video Tag (2 Video) and Speaker Out (3.5 mm), RJ45 (x2, Etherm), MPI Port (RJ12)  300 × 200  57.1 × 32.8 × 1.8 in. 1,449 × 832 × 45.9 mm  57.1 × 35.3 × 9.3 in. 1,449 × 896 × 235 mm  62.9 × 37.4 × 6.8 in. 1,600 × 950 × 172 mm  37.7 lbs. / 17.1 kg  38.1 lbs. / 17.3 kg  53.8 lbs. / 24.4 kg  10.1 / 10.1 / 9.9 / 12.8 mm  3.2 / 3.2 / 3.2 / 3.2 mm	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature  Connectivity  Mechanical	EZ-Manager, USB Cloning, Menu, One Channel Map (  HDMI In (x3), USB 2.0 (x2),  VESA Compatible  Dimensions Without Stand (W x H x D)  Dimensions With Stand (W x H x D)  Shipping Dimensions (W x H x D)  Weight without Stand  Weight with Stand  Shipping Weight  On Bezel Width (L/R/T/B)  Off Bezel Width (L/R/T/B)  Power Supply (Voltage, Frequency)  Power Consumption (Typ. / Max)  Standby Power	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg 51.8 lbs. / 23.5 kg 73.8 lbs. / 33.5 kg 11.0 / 11.0 / 12.4 / 16.7 mm 1.3 / 1.3 / 1.3 / mm	2 (HDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Florstant ON, VLAN ID, Port Block, Lock Mong Mode, BEACON, Video Tag (2 Video) nal Speaker Out (3.5 mm), RJ45 (x2, Etherm), MPI Port (RJ12)  300 × 200  57.1 × 32.8 × 1.8 in. 1,449 × 832 × 45.9 mm  57.1 × 35.3 × 9.3 in. 1,449 × 896 × 235 mm  62.9 × 37.4 × 6.8 in. 1,600 × 950 × 172 mm  37.7 lbs. / 17.1 kg  38.1 lbs. / 17.3 kg  53.8 lbs. / 24.4 kg  10.1 / 10.1 / 9.9 / 12.8 mm  3.2 / 3.2 / 3.2 / 3.2 mm  100-240 Vac, 50/60 Hz	2 / Solution), IoT  RS-232C, MPI), Multi-code IR, Installe ode (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P
Hospitality Feature  Connectivity  Mechanical	EZ-Manager, USB Cloning, Menu, One Channel Map ( HDMI In (x3), USB 2.0 (x2), VESA Compatible Dimensions Without Stand (W x H x D) Dimensions With Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/T/B) Off Bezel Width (L/R/T/B) Power Supply (Voltage, Frequency) Power Consumption (Typ. / Max) Standby Power Consumption	Wake on RF, WOL, Diagnostics (IP Remo LCM), External Speaker Out / Line Out, Compatibility, Energy Savi RF In, Digital Audio Out (Optical), Exter Only (3.5 300 × 200 67.8 × 38.9 × 2.0 in. 1,719 × 989 × 50.9 mm 67.8 × 41.6 × 12.6 in. 1,719 × 1,057 × 319 mm 72.4 × 44.5 × 7.9 in. 1,839 × 1,130 × 200 mm 50.5 lbs. / 22.9 kg 51.8 lbs. / 23.5 kg 73.8 lbs. / 33.5 kg 11.0 / 11.0 / 12.4 / 16.7 mm 1.3 / 1.3 / 1.3 / 1.3 mm 100-240 Vac, 50/60 Hz	te (HDMI 2), Voice Recognition (Standalone of the Charles), Simplink (HDMI-CEC (1.4)), IR Out (Finstant ON, VLAN ID, Port Block, Lock Mong Mode, BEACON, Video Tag (2 Video) nal Speaker Out (3.5 mm), RJ45 (x2, Etherm), MPI Port (RJ12)  300 × 200  57.1 × 32.8 × 1.8 in. 1,449 × 832 × 45.9 mm  57.1 × 35.3 × 9.3 in. 1,449 × 896 × 235 mm  62.9 × 37.4 × 6.8 in. 1,600 × 950 × 172 mm  37.7 lbs. / 17.1 kg  38.1 lbs. / 17.3 kg  53.8 lbs. / 24.4 kg  10.1 / 10.1 / 9.9 / 12.8 mm  3.2 / 3.2 / 3.2 / 3.2 mm  100-240 Vac, 50/60 Hz  347 W / 302 W  Less than 0.5 W	RS-232C, MPI), Multi-code IR, Installed (Limited), RJP (Remote Jack Pack Pack Pack Pack Pack Pack Pack P

<sup>\*\*</sup> APL = Average Picture Level





<sup>\*</sup> Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.