

Job Name/Location:

Tag No.:

Date:

For:	File	Resubmit
	Approval	Other_____

PO No.:



Architect: GC:

Engr: Mech:

Rep:

(Company)

(Project Manager)



LH368HHV4

Single Zone High Static Ducted with LGRED°

Outdoor Unit (ODU) - LUU360HHV, Indoor Unit (IDU) - LHN368HV

Performance:

Cooling:

Cooling Capacity (Min~Rated~Max, Btu/h)	14,400 ~ 36,000 ~ 44,000
SEER2	18.30
EER2	12.00

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

Heating:

Heating Capacity (Min~Rated~Max, Btu/h)	16,000 ~ 40,000 ~ 46,000
HSPF2	9.20
Max Heating @ Indoor 70° DB (Btu/h)	
Outdoor 17°F WB	41700
Outdoor 5°F WB	33600
Outdoor -4°F WB	35,970
Outdoor -13°F WB	30,000

HSPF - Heating Seasonal Performance Factor

Cooling Nominal Test Conditions:

Indoor: 80°F DB / 67°F WB

Outdoor: 95°F DB / 75°F WB

Heating Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB

Outdoor: 47°F DB / 43°F WB

Electrical:

Power Supply ¹ (V/Hz/Ø)	208-230/60/1
MOP (A)	40
MCA (A)	32
Cooling / Heating Rated Amps (A)	12.8 / 14.9
Compressor(A)	22.0
Fan Motor (IDU + ODU) (A)	1.0 + (2x1.6)
Cooling Power Input (kW)	0.70 ~ 3.00 ~ 5.50
Heating Power Input (kW)	0.84 ~ 3.37 ~ 4.50
Locked Rotor Amps (A)	33

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

Installed Liquid Pipe (in., O.D.)	3/8 Flare
Installed Vapor Pipe (in., O.D.)	5/8 Flare
IDU Liquid Connection (in., O.D.)	3/8 Flare
IDU Vapor Connection (in., O.D.)	5/8 Flare
Additional Refrigerant (oz./ft.)	0.43
Min./Max. Pipe Length ² (ft.)	16.4 / 246
Piping Length (no add'l refig., ft.)	24.9
Max. Elevation (ft.)	98.4

Features:

- Auto ESP function
- Hot start
- Internal condensate pump
- ODU drain pan heater
- Inverter (variable speed fan)
- Auto restart
- Control lock
- Group control
- Timer (on/off)
- Sleep mode
- Optional Wi-Fi Control
- Night quiet function
- IDU compatible with Multi F ODU's (24k, 36k models)

Required Accessories:

- Controller (any LG wired remote controller)

Optional Accessories:

- | | |
|--|---|
| <input type="checkbox"/> MultiSITE™ CRC1 - PREMTBVC0 | <input type="checkbox"/> Dynamic V8 2VL Low Profile Air Cleaner - ZPLMV201A |
| <input type="checkbox"/> MultiSITE CRC1+ - PREMTBVC1 | <input type="checkbox"/> Dry Contact (Simple) - PDRYCB100 |
| <input type="checkbox"/> MultiSITE Comm. Mgr. - PBACNBTR0A | <input type="checkbox"/> Dry Contact (3rd Party) - PDRYCB320 |
| <input type="checkbox"/> AC Smart 5 - PACS5A000 | <input type="checkbox"/> Dry Contact (Setback) - PDRYCB400 |
| <input type="checkbox"/> Simple Controller - PREMTCC00 | <input type="checkbox"/> PI-485 - PMNFP14A1 |
| <input type="checkbox"/> Wi-Fi module - PWFMD200 | <input type="checkbox"/> Aux Heater Relay Kit - PRARH1 |
| <input type="checkbox"/> ACP 5 - PACP5A000 | <input type="checkbox"/> High Efficiency Filter Box - ZFBXM201A |
| <input type="checkbox"/> Low Ambient Wind Baffle ¹¹ | |

(Cooling operation to -4°F) - ZLABGP04A x 2

For a complete list of available accessories, contact your LG representative.

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lghvac.com

Operating Range:

Outdoor Unit:

Cooling (°F DB)	5 to 118
Heating (°F WB)	-13 to 64

Indoor Unit:

Cooling (°F WB)	57 to 77
Heating (°F DB)	59 to 81

System Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Refrigerant Charge (lbs.)	7.5
ODU Sound Pressure Max (Cool / Heat) ±1 dB(A) ³	52 / 54
IDU Sound Pressure (H/M/L) ±1 dB(A) ³	44 / 42 / 40
ODU Net / Shipping Weight (lbs.)	198.9 / 223.1
IDU Net / Shipping Weight (lbs.)	85.3 / 99.4
Heat Exchanger Coating	GoldFin™

Fan:

ODU / IDU Fan Type	Propeller/ Sirocco
Fan Speeds (Fan/Cool/Heat)	3 / 3 / 3
Fan Quantity (ODU + IDU)	2 + 2
Motor/Drive	Brushless Digitally Controlled/Direct
Maximum ODU Air Volume (CFM)	4,238
IDU Air Volume (H/M/L) (CFM)	1,130 / 998 / 847
Dehumidification Rate (pts/hr)	7.9
IDU External Static Pressure (ESP)	
Operating Range (min ~ default ~ max) (in-wg)	0.1 ~ 0.24 ~ 0.59

Notes:

1. Acceptable operating voltage: 187V-253V.
2. Piping lengths are equivalent.
3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
4. Maximum static pressure may result in reduced airflow (CFM).
5. All communication / connection (power) cable from the outdoor unit to the indoor unit is field supplied and is to be minimum four-conductor, 14 AWG, stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only), and must comply with applicable local and national codes.
6. See Engineering Manual for sensible and latent capacities.
7. Power wiring cable size must comply with the applicable local and national code.
8. The indoor unit comes with a dry helium charge.
9. This data is rated 0 ft. above sea level, with 24.6 ft. of refrigerant line and a 0 ft. level difference between outdoor and indoor units.
10. Must follow installation instructions in the applicable LG installation manual.
11. If the optional low ambient wind baffle (ZLABGP04A) is used, one wind baffle is required for each ODU fan.



LH368HHV4

Single Zone High Static Ducted with LGRED°


Outdoor Unit (ODU) - LUU360HHV, Indoor Unit (IDU) - LHN368HV



Tag No.: _____

Date: _____

PO No.: _____

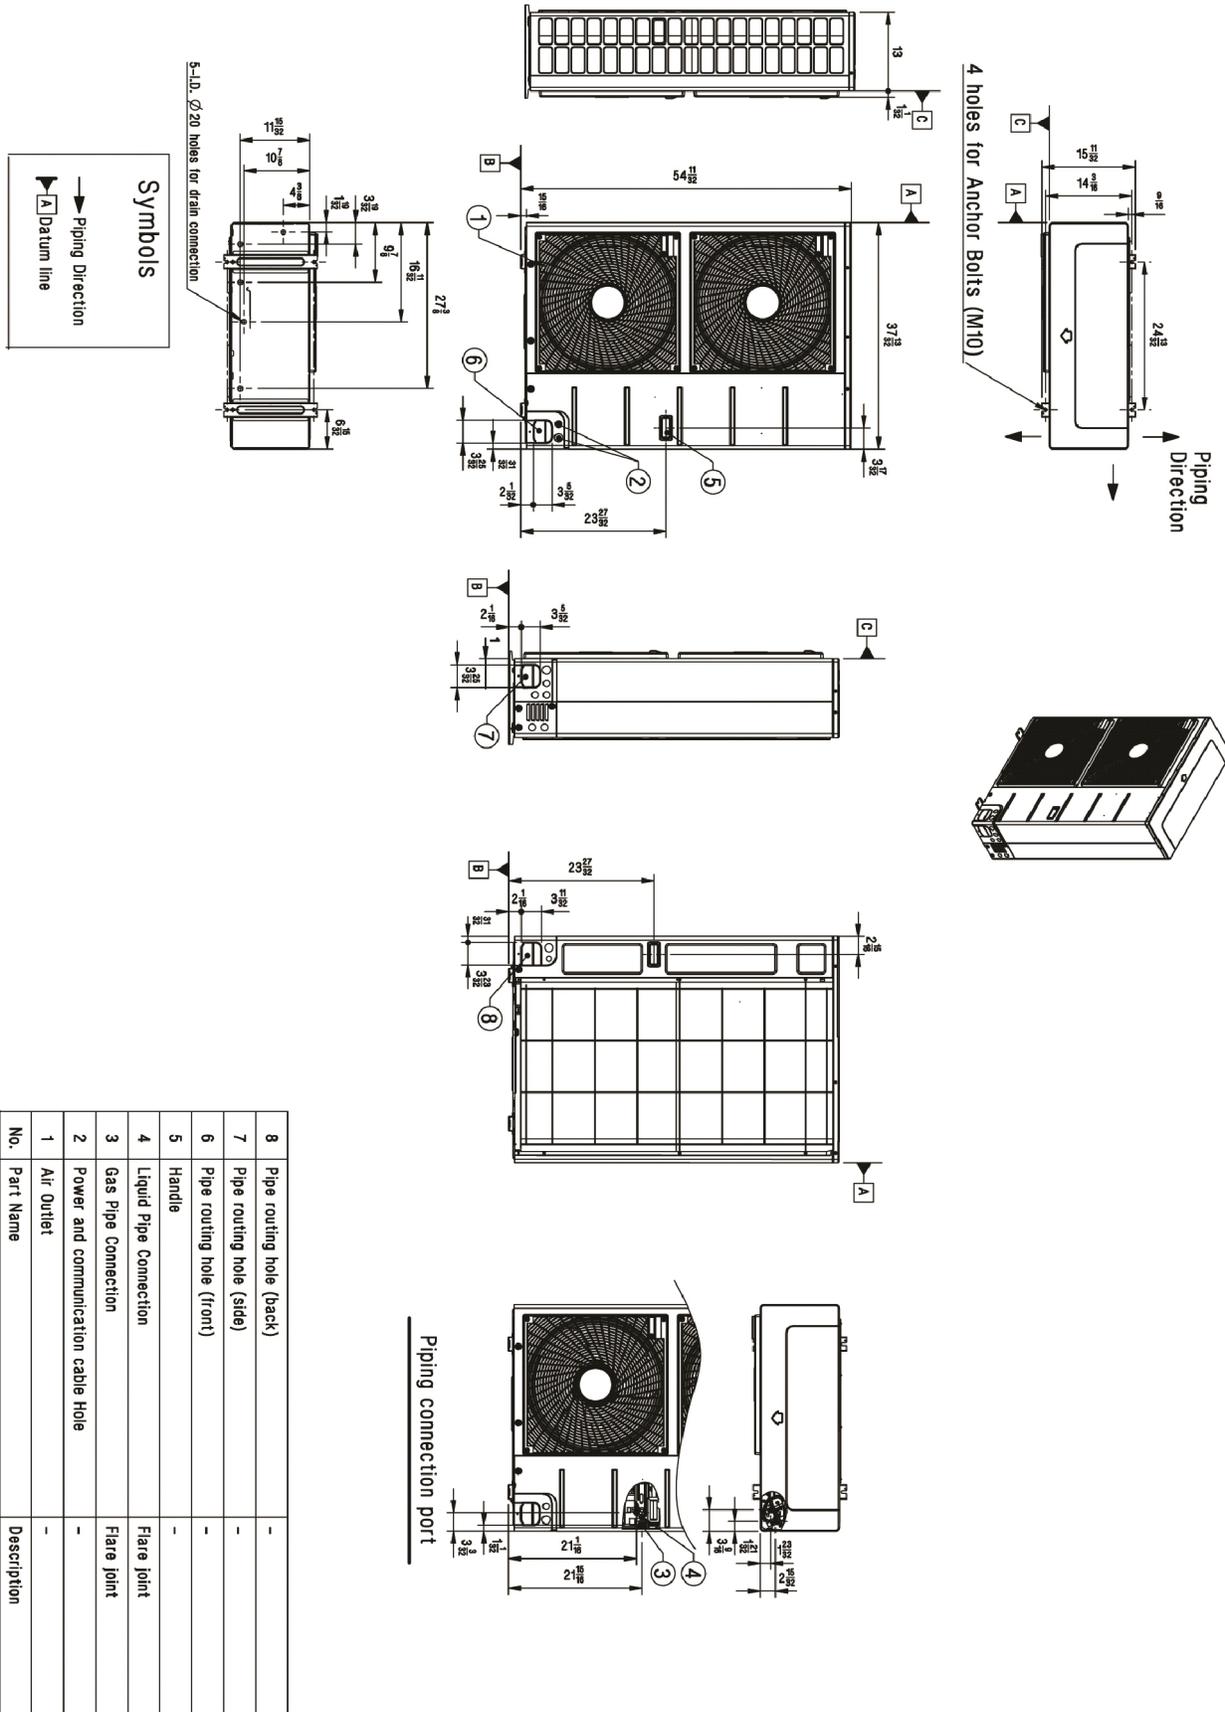

No.	Part Name	Description
8	Pipe routing hole (back)	-
7	Pipe routing hole (side)	-
6	Pipe routing hole (front)	-
5	Handle	-
4	Liquid Pipe Connection	Flare joint
3	Gas Pipe Connection	Flare joint
2	Power and communication cable Hole	-
1	Air Outlet	-

LH368HHV4

Single Zone High Static Ducted with LGRED[®]


Outdoor Unit (ODU) - LUU360HHV, Indoor Unit (IDU) - LHN368HV



Tag No.: _____

Date: _____

PO No.: _____

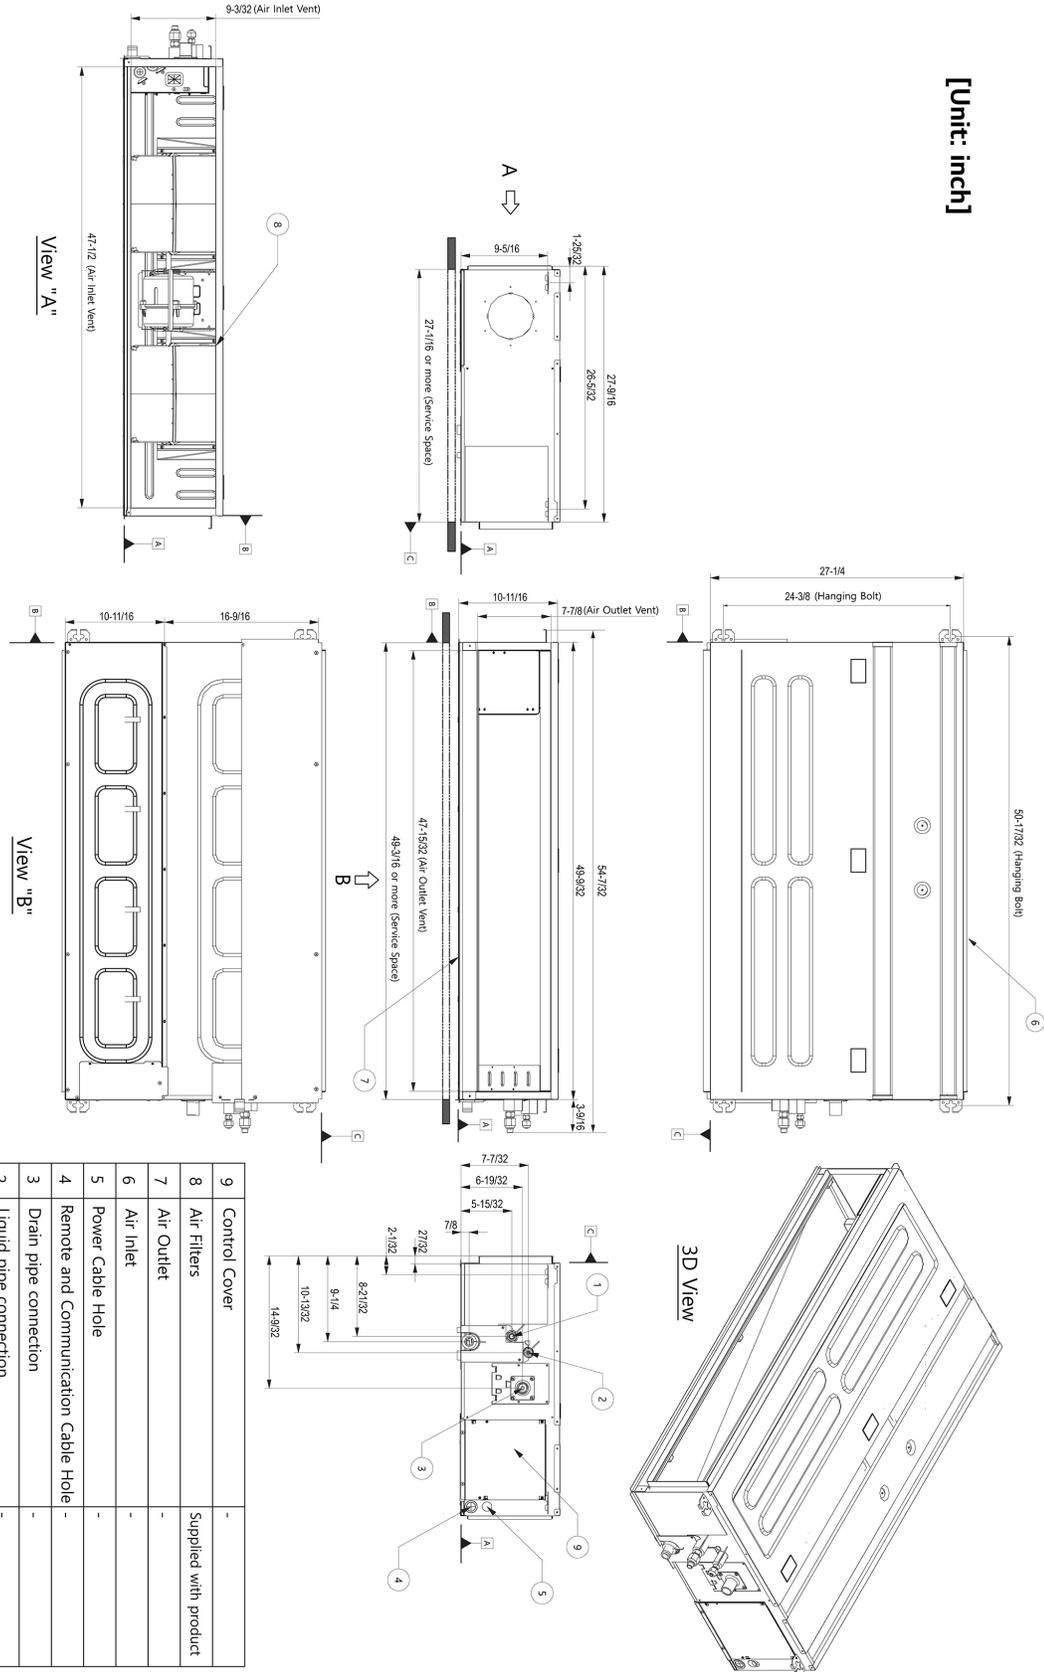

[Unit: inch]