

4K Ultra HD Smart TV





Compatible with Apple AirPlay



Pro:Centric Smart



Pro:Idiom





UM670H Series

Design	Stand Type	86" / 65": 1 pole (Fixed) 55" / 50"/ 43": 1 pole (Swivel)	
Display	Sizes	65" / 55" / 50" / 43"	
	Resolution	3,840 x 2,160 (4K UHD)	
Broadcasting System	Digital	ATSC, Clear QAM	
	Analog	NTSC	
VESA	86": 400 x 400 65" / 55": 300 x 300 50" / 43": 200 x 200		



Pro:Centric Smart Platform

LG's Pro:Centric Smart HTML global platform hosts system integrator partners' in-room entertainment applications with proven backward compatibility across multiple generations of webOS smart TVs. It offers one of the widest possible choices of interactive systems to our hospitality customers. Through the Pro:Centric middleware API and chromium browser, partner applications can control all aspects of theLG smart television to provide a completely unique, customizable branded user experience for hotel guests encompassing entertainment, interactive features, streaming services and digital compendiums.



Pro:Centric Direct Hotel Management Solution from LG

The Pro:Centric Direct hotel content management solution offers simple editing tools, making it easy to perform service and IP network-based remote management with a single click. Pro:Centric Direct enables users to customize their interface easily and efficiently manage all TVs in the facility. The most recent version* provides IoT-based in-room control as well a voice control through LG Natural Language Processing.

 $\ensuremath{^{\star}}$ Some features may not be supported based on PCD versions.



Casting Capable

With Apple AirPlay® and Google Cast™, guests can cast content directly to this LG Pro:Centric Smart Hotel TV, right from their favorite wireless devices. Whether it's to watch movies and shows from their favorite apps or share what's on their devices, including photos, personal videos, games and more, guests view what they want, when they want. They simply and securely pair their device directly to the guestroom TV once for the duration of their stay.



Netflix Included

Experience a wide variety of video content from Netflix on UM670H with Pro:Centric Direct. Enjoy the comfort of your room and a streaming service that offers a thousands of selections.

* Netflix membership required.



Slim Depth for a Sleek Look


With a slim design, the UM670H series integrates smoothly with interiors, delivering a modern impression to your guests.



SoftAP

Software-enabled Access Point* (SoftAP) is a virtual Wi-Fi feature that uses TV as a wireless hotspot, enabling guests to connect their own devices to the SoftAP.

* Screen Share may not be operated at the same time.

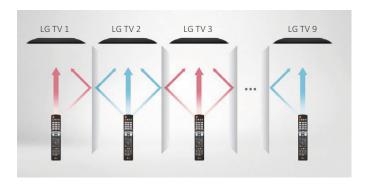

Multi-code IR

Multi-code IR* function eliminates any remote-control signal interaction between multiple TVs in one place. LG hospital TV supports this when used with the Multi-code IR remote control, so users can freely control their own TVs without disturbing the others.

* Multi-code IR remote control is not provided by LG. (sold separately)



Kensington Lock Slot



Reinforced Metal Stand



Lock Down Plate with Credenza Aperture


Physical Security Features (55", 50" and 43" only)

Select LG Hotel TVs are protected by the reliable Kensington Lock solution (lock sold separately). They also come with a metal-reinforced stand to improve sturdiness, durability and safety. Finally these models include a lock-down plate with credenza aperture to lock the TV firmly to the credenza for added security.

* Magic Motion Remote is required (sold separately)

CONNECTIVITY 86" / 65" / 55" / 50" / 43"


Rear



Side




TECHNICAL DRAWINGS

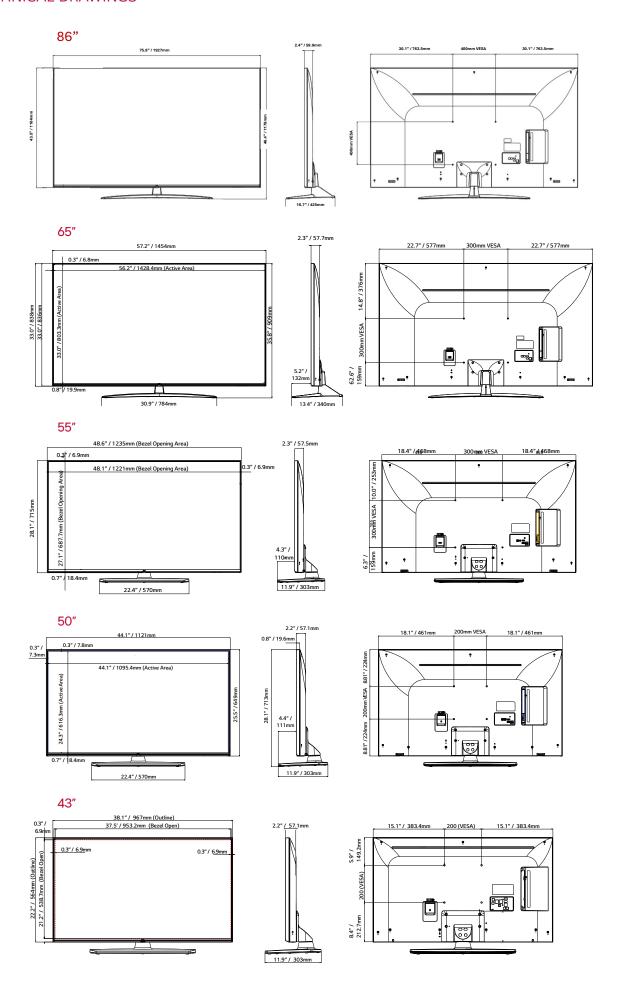


SPECIFICATIONS


	,	86UM670H0UD	65UM670H0UG	55UM670H0UA	50UM670H0UA	43UM670H0UA		
Category	Category	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart		
Display	Diagonal	86"	65"	55"	50"	43"		
	Resolution	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	3,840 ×2,160 (UHD)		
	Backlight Cabinet Type	Direct	Direct	Direct	Direct	Direct		
	Brightness	330 nits	330 nits	330 nits	330 nits	330 nits		
	Dynamic Conrast Ratio	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1		
	Static (Panel) Contrast Ratio	1,200:1	1,200:1	1,300:1	5,000:1	1,200:1		
	Response Time	8 ms (G to G)	8 ms (G to G)	14 ms (G to G)	19 ms (G to G)	8 ms (G to G)		
	Refresh Rate	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz		
	Life Span	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.		
Video	Al Picture Pro	Yes	Yes	Yes	Yes	Yes		
	Dynamic Vivid	Yes	Yes	Yes	Yes	Yes		
	HDR 10 Pro / HDR HLG	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes		
	Game Optimizer	Yes	Yes	Yes	Yes	Yes		
Audio	Speaker (Sound Output)	10 W + 10 W	10 W + 10 W	10 W + 10 W	10 W + 10 W	10 W + 10 W		
	Speaker System	2.0 ch	2.0 ch	2.0 ch	2.0 ch	2.0 ch		
	Al Sound Pro / Al Sound	Yes	Yes	Yes	Yes	Yes		
	Al Acoustic Tuning	Yes (Ready)	Yes (Ready)	Yes (Ready)	Yes (Ready)	Yes (Ready)		
	LG Sound Sync	Optical/Bluetooth Wireless	Optical/Bluetooth Wireless	Optical/Bluetooth Wireless	Optical/Bluetooth Wireless	Optical/Bluetooth Wireless		
Broadcasting	Digital (Terrestrial / Cable / Satellite)	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM		
	Analog	NTSC	NTSC	NTSC	NTSC	NTSC		
	Global IPTV Support	Yes	Yes	Yes	Yes	Yes		
Hospitality Solution	Solution Type	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct,		
	Pro:Idiom (S/W Type), (Mobile, Lite)	Yes	Yes	Yes	Yes	Yes		
Smart Features		trt Home (Launcher Bar), Gallery Mode, Quick Access, Web Browser, SDP Server Compatibility, Magic Remote Compatibility (MR18HA), SW Clock (World Clock / Alarm), Softwirt Share, DIAL, Bluetooth Audio Playback, Mobile Connection Overlay, HDMI-ARC (HDMI 2), Voice Recognition (Standalone/Solution), IoT, EZ-Manager, USB Cloning, Wake on Diagnostics (IP Remote), SI Compatible Protocol (MPI, RS-232C), HTNG-CEC (1.4), Simplink (HDMI-CEC) (1.4), IR Out (MPI, RS-232C), Multi-code IR						
Hospitality Features		Lock Mode (Limited), Port Block, Welcome Screen (Splash Image), Insert Image, One Channel Map (LCM) External Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), Instant On, VLAN ID, RJP (Remote Jack Pack) (Teleadapt/Guestlink (HDMI-CEC)), Mobile Remote, Moving Picture Playback (SD/HD/Plus HD), Auto Off / Sleep Timer, Energy Saving Mode, Motion Eye Care, b-LAN embedded Anti-theft System						
Jack Interface	(Kensington Lock, Credenza/Security Aperture (Except 65"), Lock Down Plate (Except 65") Set Side HDML In v2 (2.0) USB In (2.0) PS-222C In (3.5 mm TDPS) Security Plate (Except 65")							
	Set Side HDMI In x2 (2.0), USB In (2.0), RS-232C In (3.5 mm TRRS), Speaker Out/Line Out (3.5 mm Stereo), Service Only (3.5 mm TRS) Set Rear HDMI In (2.0), USB In (2.0), Antenna/Cable In (Dual b-LAN), Optical Digital Audio Out, TV-Link CFG (3.5 mm TRS) (b-LAN Service), LAN (RJ45), Aux LAN (RJ45), MPI Port (RJ12)							
	Set Rear		1	300 ×300 mm	1			
Mechanical	VESA Compatible	400 x 400 mm	300 ×300 mm	300 ×300 mm	200 ×200 mm	200 ×200 mm		
	Stand Type	1 pole (Fixed)	1 pole (Fixed)	1 pole (Swivel)	1 pole (Swivel)	1 pole (Swivel)		
	Front Color	Dark Charcoal Gray	Dark Charcoal Gray	Dark Charcoal Gray	Dark Charcoal Gray	Dark Charcoal Gray		
	Dimensions without Stand (W x H x D)	75.9 x 43.5 x 2.4 in. 1927 x 1104 x 59.9 mm	57.2 x 33 x 2.3 in. 1,454 x 838 x 57.7 mm	48.6 x 28.1 x 2.3 in. 1,235 x 715 x 57.5 mm	44.1 x 25.6 x 2.2 in. 1,121 x 651 x 57.1 mm	38.1 x 22.2 x 2.2 in. 967 x 564 x 57.1 mm		
	Dimensions with Stand (W x H x D)	75.9 x 46.4 x 16.7 in. 1927 x 1178 x 425 mm	57.2 x 35.8 x 13.4 in. 1,454 x 909 x 340 mm	48.6 x 30.6 x 11.9 in. 1,235 x 777 x 303 mm	44.1 x 28.1 x 11.9 in. 1,121 x 713 x 303 mm	38.1 x 24.5 x 11.9 in. 967 x 623 x 303 mm		
	Shipping Dimensions (W x H x D)	83.3 x 47.9 x 11.2 in. 2116 x 1217 x 285 mm	63.0 x 38.2 x 9.0 in. 1,600 x 970 x 228 mm	53.5 x 33.9 x 8.1 in. 1,360 x 860 x 207 mm	51.9 x 31.9 x 7.4 in. 1,317 x 810 x 188 mm	42.3 x 26.0 x 8.0 in. 1,075 x 660 x 203 mm		
	Weight without Stand	107.8 lbs. / 48.9 kg	47.4 lbs. / 21.5 kg	30.9 lbs. / 14.0 kg	26.7 lbs. / 12.1 kg	19.4 lbs. / 8.8 kg		
	Weight with Stand	99.6 lbs. / 45.2 kg	50.5 lbs. / 22.9 kg	37.9 lbs. / 17.2 kg	33.7 lbs. / 15.3 kg	26.5 lbs. / 12.0 kg		
	Shipping Weight	137.6 lbs. / 62.4 kg	63.7 lbs. / 28.9 kg	49.2 lbs. / 22.3 kg	41.0 lbs. / 18.6 kg	34.0 lbs. / 15.4 kg		
	On Bezel Width (L/R/U/B)	15.9/15.9/15.9/19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm		
	Off Bezel Width (L/R/U/B)	6.9/6.9/6.9/18.4 mm	6.8 / 6.8 / 6.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm	7.3 / 7.3 / 7.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm		
Electrical	Power Supply (Voltage, Hz)	100-240 Vac, 50/60 Hz	100-240 Vac, 50/60 Hz	100-240 Vac, 50/60 Hz	100-240 Vac, 50/60 Hz	100-240 Vac, 50/60 Hz		
	Power Consumption (Typ. / Max.)	290 W / 335 W	144 W / 180 W	135 W / 163 W	112 W / 135 W	82 W / 119 W		
Warranty &	Warranty	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited		
	Certification	FCC / UL	FCC / UL	FCC / UL	FCC / UL	FCC / UL		
Warranty &		i .	t contract the contract to the	1				
Warranty & Other	UPC	1 95174 11014 0	1 95174 06331 6	1 95174 06342 2	1 95174 06336 1	1 95174 06340 8		

^{*} Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.









www.instagram.com/lgforbusinessusa



