

25.5 cu. ft. Bottom Freezer Refrigerator

- 25.5 cu. ft. Capacity
- Door Cooling+
- Multi-Air Flow Technology
- Premium LED Lighting
- Glide N' Serve® Drawer
- 2 Humidity Crispers
- Factory Installed Ice Maker
- SmartDiagnosis™



COLOR AVAILABILITY

- LRDCS2603S – PrintProof™ Stainless Steel
- LRDCS2603D – PrintProof™ Black Stainless Steel

CAPACITY

Refrigerator (cu. ft.)	17.2
Freezer (cu. ft.)	8.3
Total Capacity (cu. ft.)	25.5

ENERGY

Energy Consumption (kWh / Year)	562
ENERGY STAR® Certified	Yes

WATER & ICE SYSTEM

Ice & Water Dispenser	No
Ice System	Factory Installed Ice Maker
Daily Ice Production (lbs.)	2.5 lbs.
IcePlus™ Production (lbs.)	2.7 lbs.
Ice Storage Capacity (lbs.)	12 lbs.
Water Filter	LT1000P (NSF-Certified*)

COOLING

Compressor Type	Linear Compressor
Dual Evaporators	No
Multi-Air Flow System	Yes
Door Cooling+	Yes
Temperature Sensors	5
Fresh Air Filter	No

CONVENIENCE

Display Type	Membrane (White LED)
Temperature Controls	Electronic / Digital
Door Alarm	Yes
Child Lock	No
Auto Closing Door Hinge	No
ADA Compliant	No
Sabbath Mode	Yes (Star-K-Certified)
LoDecibel® Quiet Operation	Yes

REFRIGERATOR

No. of Shelves	3 Full Width (2 Adjustable)
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crispers
Glide N' Serve® Pantry Drawer	Yes
Cool Guard	No
Refrigerator Light	Ceiling LED

REFRIGERATOR DOOR

No. of Door Bins	2 Gallon Sized, 2 Half (Tilt), 1 Small
Door Bin Construction	1 Piece (Clear)

FREEZER

Freezer Type	Pull Drawer
Freezer Drawers	2-Tier Organization
DuraBase™ Solid Drawer Base	Yes
Drawer Divider	Yes
Ice Storage	Ice Maker & Ice Bin in Freezer
Freezer Light	Ceiling LED
Freezer Handle	Matching Handle

SMART FEATURES

Wi-Fi Enabled	No
ThinQ® Technology	No
SmartDiagnosis™	Yes

MATERIALS AND FINISHES

Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Matching Handles

ACCESSORIES

Replacement Water Filter	LT1000P
--------------------------	---------

TECHNICAL SPECS

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Location	Back
Min. / Max. Water Pressure	40–120 psi

DIMENSIONS / CLEARANCES / WEIGHTS

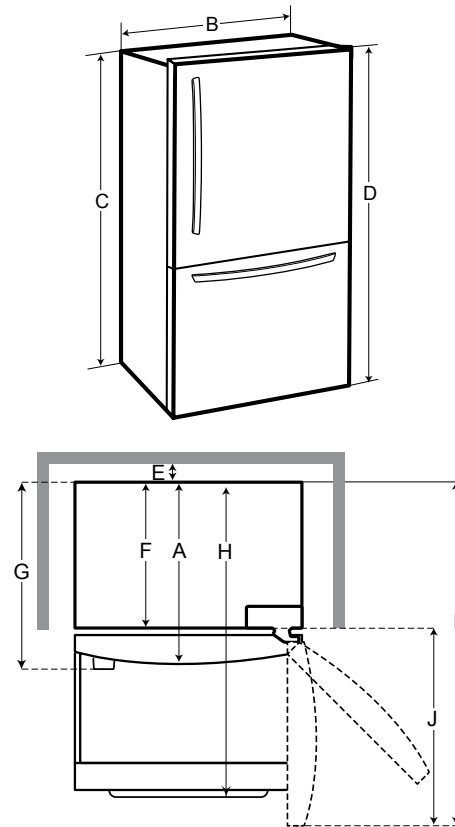
Depth with Handles	34 ⁷ / ₈ "
Depth without Handles	33"
Depth without Door	29"
Depth (Total with Door Open)	62 ³ / ₄ "
Height to Top of Case	68 ⁵ / ₈ "
Height to Top of Door Hinge	69 ⁷ / ₈ "
Width	32 ³ / ₄ "
Width (Door Open 90° with Handle)	36 ¹ / ₂ "
Width (Door Open 90° without Handle)	34 ¹ / ₂ "
Door Edge Clearance with Handle	4 ¹ / ₄ "
Door Edge Clearance without Handle	2"
Installation Clearance	Sides ¹ / ₈ ", Top 1", Back 2"
Approx. Weight (Product / Carton)	226 lbs. / 250 lbs.
Carton Dimensions (W x H x D)	35" x 73" x 38"

LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear / Inverter Compressor (Parts Only)	10 Years



*System tested and certified by NSF® International against NSF / ANSI Standard 42, Standard 53 and Standard 401.

DIMENSIONS / CLEARANCES**DIMENSIONS / CLEARANCES**

A	Depth without Handles	33"
B	Width	32 ³ / ₄ "
C	Height to Top of Case	68 ⁵ / ₈ "
D	Height to Top of Hinge	69 ⁷ / ₈ "
E	Back Clearance	2"
F	Depth without Door	29"
G	Depth with Handle	34 ⁷ / ₈ "
H	Depth (Total with Freezer Drawer Open)	TBD
I	Depth (Total with Door Open 90°)	62 ³ / ₄ "
J	Front Clearance	TBD

INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 27 inches (686 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.