

27-inch 4K Mini-LED Surgical Monitor

27HS714S-W



Outstanding Image Quality with LG Mini-LED Technology


1.5K Local Dimming Zones

Boasting the exceptional picture quality of LG Mini-LED technology, the 27HS714S-W provides brilliant and true-to-life images with a high level of detail, allowing surgeons to experience an immersive environment to focus clearly on the surgical procedure. Local Dimming, inherent to Mini-LED technology, enables precise brightness control across the entire LED backlight, enhancing visual contrast by darkening the dark areas and brightening the light areas. This monitor, equipped with 1.5K Local Dimming zones, significantly enhances the dynamic contrast ratio up to 1,000,000 : 1 and reaches a peak brightness up to 2,000 cd/m². Additionally, the Local Dimming technique used in this Mini-LED monitor may improve energy efficiency compared to traditional edge-lit backlight technologies, thereby prolonging the life of the display.



Expanded Color Reproduction

With a wide color range of DCI-P3 98%, the 27HS714S-W provides a great level of detail with optimized image clarity and enhanced color response.




— DCI P3
— Measured (32HR734S)
Area : 105.1%
Coverage : 98.2%



Suitable for Surgical Environments

Optical Bonding

The 27HS714S-W is engineered with optical bonding technology, seamlessly integrating the backlight, module, and glass without any air gaps, further enhanced with Anti-Glare, Anti-Reflection, and Anti-Fingerprint coatings on the front glass. This combination significantly improves display readability by minimizing reflections and glare, ensuring that image clarity and color response are optimized even in brightly lit environments.

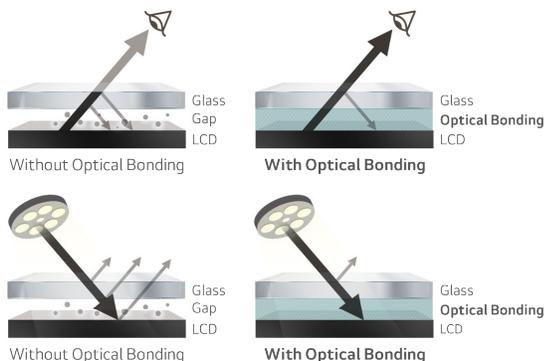

IP45 (front) & IP32 (except for front) & IK06

With IP45 (front) and IP32 (except for front) ratings, the 27HS714S-W is suitable for surgical environments where blood and other bodily fluids are likely to splash. Additionally, this monitor offers resistance to physical impact, as denoted by its IK06 rating.

12G-SDI Support

The 27HS714S-W supports 12G-SDI, which enables long-distance transmission of 4K signals over a single coaxial cable.

Lightweight Design

Weighing only 21.3 lbs, this surgical monitor is suited for mounting on surgical arms and pendants.

* All images, including surgical images on the display, are shown for illustrative purposes only, and may vary from the actual product / usage / or images appearing on the display.






User Convenience


Up to 4 PBP & PIP

The 27HS714S-W supports both 4PBP (Picture-by-Picture) and PIP (Picture-in-Picture), allowing it to display input from up to four different sources simultaneously or overlay one input on another. These features enable medical professionals to monitor various critical information streams concurrently on a single screen, enhancing operational efficiency and decision-making. For example, using the 27HS714S-W, medical staff can view a combination of laparoscopic and endoscopic images while monitoring vital signs.

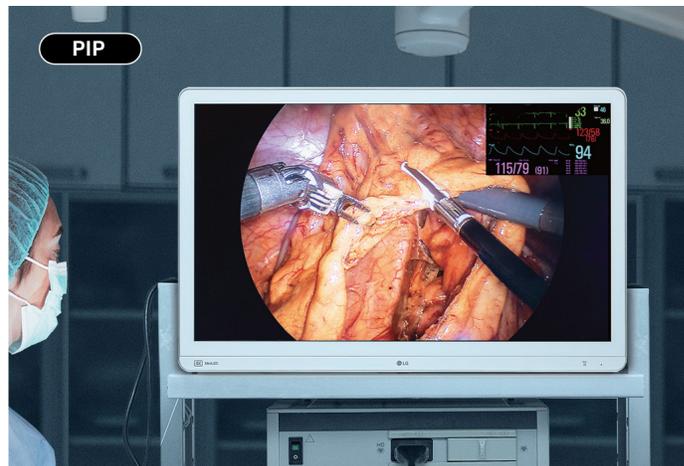


Clone Screen

The 27HS714S-W features a Clone Screen function that replicates the entire display content onto a secondary monitor, even with advanced settings like PIP or PBP. The Clone Screen functionality is facilitated through the HDMI output. By using Clone Screen, surgical team members can visually monitor the progress of the surgery, which can help facilitate efficient collaboration and communication.

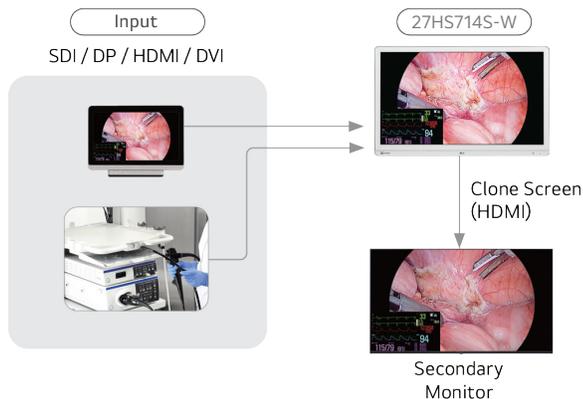


Mirror Mode & Rotation Mode

Mirror Mode and Rotation Mode allow users to adjust the display for optimal viewing, whether flipping the image horizontally or rotating it 180 degrees to match the orientation of the surgical camera.

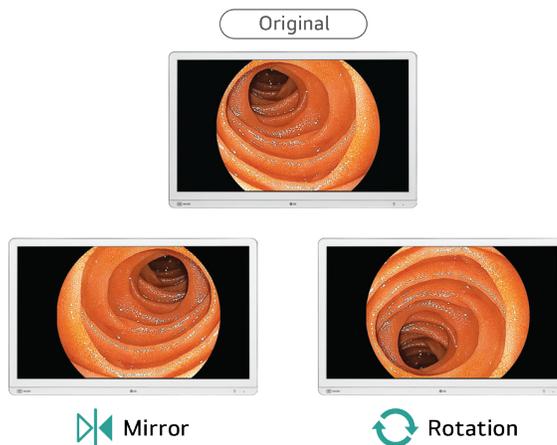

Failover Input Switch

The Failover Input Switch feature on this monitor ensures uninterrupted video signal by automatically switching to an alternative video source if the primary input fails. This function is compatible across all interfaces, including HDMI, SDI, DVI, and DP, offering flexibility in setup and redundancy in signal sources. Particularly for 12G-SDI, the system can automatically switch from the primary input to the next available input if a signal loss is detected. This seamless transition between inputs minimizes disruptions and ensures consistent video output, essential for surgical applications where continuity and image clarity are critical.

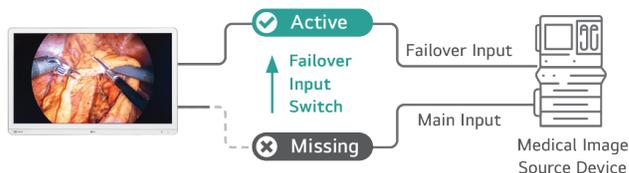

* All images, including surgical images on the display, are shown for illustrative purposes only, and may vary from the actual product / usage / or images appearing on the display.

27-inch 4K Mini-LED Surgical Monitor

27HS714S-W

Specification

27HS714S-W

Model		
Display	Panel Type	IPS
	Size (Aspect Ratio)	27-inch (16:9)
	Resolution	4K (3,840 x 2,160)
	Backlight Technology	Mini-LED
	Color Gamut (Typ.)	DCI-P3 98% (CIE1976)
	Color Bit	10 bit
	Viewing Angle (CR≥10)	178° (Right / Left), 178° (Up / Down)
	Brightness (Typ.)	800 cd/m ²
	Brightness (Stabilization)	500 cd/m ²
	Peak Brightness (Typ.)	2,000 cd/m ²
	Surface Treatment	Protection Glass (Optical Bonding, Anti-Reflection, Anti-Fingerprint, Anti-Glare)
	Contrast Ratio (Typ.)	1,000:1
	Response Time (GtG ¹)	5 ms (GtG at Faster)
Feature	DICOM Compliant	Yes
	HW Calibration	Yes (LG Calibration Studio)
	HDR	HDR 10, HDR Effect
Video Signals	Input Terminals	HDMI x 1, DisplayPort x 1, SDI (12G / 3G) x 4, DVI-D x 1
	Output Terminals	DisplayPort x 1, SDI (12G / 3G) x 4, DVI-D x 1
Connectivity	USB	USB 3.0 1 Upstream, 1 Downstream
Power	AC Input	100-240 Vac, 50/60 Hz
	Power Consumption (Max.)	120 W
	Power Consumption (DC Off)	Less than 0.3 W
Resistance Rating ²		IP45 ³ (Front), IP32 ⁴ (Except for Front), IK06 ⁵
User Convenience	PBP / PIP	Yes (2 / 3 / 4 PBP) / Yes
	Screen Flip	Mirror Mode & Rotation Mode
	Failover Input Switch	Yes
Physical Specifications	Weight	19.4 lbs. / 8.8 kg
	Wall Mount Size	7.874 x 3.937 in / 3.937 x 3.937 in 200 x 100 mm / 100 x 100 mm
Warranty		3yr limited warranty

1) GtG: Gray to gray response time

2) Tested under controlled laboratory conditions with an IP/ IK rating. Dry before using. Do not charge while wet.

3) IP45: Protected against solid foreign objects of 1.0 mm Ø and greater / Protected against access to hazardous parts with a wire / Protected against water jets.

4) IP32: Protected against solid foreign objects of 2.5 mm Ø and greater / Protected against access to hazardous parts with a tool / Protected against vertically falling water drops when enclosure tilted up to 15°.

5) IK06: Protected against 1 joule impact. (Approximately 39.37 in)

* Specifications may vary by region and all features, standards, and other product specifications are subject to change without notice or obligation