

Job Name/Location:

Tag #:

Date:

For: ☐ File ☐ Resubmit

PO No.:

☐ Approval ☐ Other

Architect:

GC:

Engr:

Mech:


Rep:

(Company)


(Project Manager)

**ZLABKA52A**

Low Ambient Baffle Kit  
for Multi V 5 8-20 Ton Outdoor Units



Side View



Front View

**Compatible Outdoor Units**

|                        |                        |
|------------------------|------------------------|
| ARUM096BTE5/ARUM096DTE | ARUM168BTE5/ARUM168DTE |
| ARUM121BTE5/ARUM121DTE | ARUM192BTE5/ARUM192DTE |
| ARUM144BTE5/ARUM144DTE | ARUM216BTE5/ARUM216DTE |
|                        | ARUM241BTE5/ARUM241DTE |

**Each kit comes with:**

- Front wind baffle
- Right wind baffle
- Left wind baffle
- Rear wind baffle
- Top discharge elbow with motorized damper and 24 volt damper actuator
- (50) #10 x 1/2" self drilling hex head screws
- Sealite connector (for routing of actuator control and power wiring down to outdoor unit electrical box)

**Standard Features:**

- Heat Recovery Configurations: 100% nominal cooling capacity available down to -9.9° F when all indoor units are in cooling mode. Synchronous mode operating range is not impacted.
- Heat Pump Configurations: Allows cooling operation down to -9.9° F.
- Damper operator has spring return, normally open actuator


**Required Accessories (sold separately):**

- ☐ Outdoor Unit Multi Application I/O Module - PRVC2


**Fitting Properties:**

|          |                   |
|----------|-------------------|
| Color    | Dark Gray         |
| Material | 20 GA Sheet Metal |

| Outdoor Unit              | Required Accessory Quantities |       |
|---------------------------|-------------------------------|-------|
|                           | ZLABKA52A                     | PRVC2 |
| ARUM096BTE5 / ARUM096DTE5 | 1                             | 1     |
| ARUM121BTE5 / ARUM121DTE5 | 1                             | 1     |
| ARUM144BTE5 / ARUM144DTE5 | 1                             | 1     |
| ARUM168BTE5 / ARUM168DTE5 | 1                             | 1     |
| ARUM192BTE5 / ARUM192DTE5 | 1                             | 1     |
| ARUM216BTE5 / ARUM216DTE5 | 1                             | 1     |
| ARUM241BTE5 / ARUM241DTE5 | 1                             | 1     |
| ARUM264BTE5 / ARUM264DTE5 | 2                             | 1     |
| ARUM288BTE5 / ARUM288DTE5 | 2                             | 1     |
| ARUM312BTE5 / ARUM312DTE5 | 2                             | 1     |
| ARUM336BTE5 / ARUM336DTE5 | 2                             | 1     |
| ARUM360BTE5 / ARUM360DTE5 | 2                             | 1     |
| ARUM384BTE5 / ARUM384DTE5 | 2                             | 1     |
| ARUM408BTE5 / ARUM408DTE5 | 2                             | 1     |
| ARUM432BTE5 / ARUM432DTE5 | 3                             | 1     |
| ARUM456BTE5 / ARUM456DTE5 | 3                             | 1     |
| ARUM480BTE5 / ARUM480DTE5 | 3                             | 1     |
| ARUM504BTE5 / ARUM504DTE5 | 3                             | 1     |

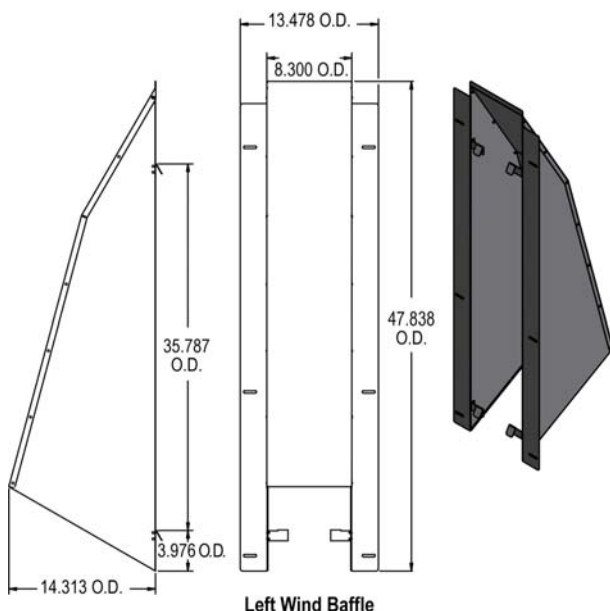

Left Wind Baffle

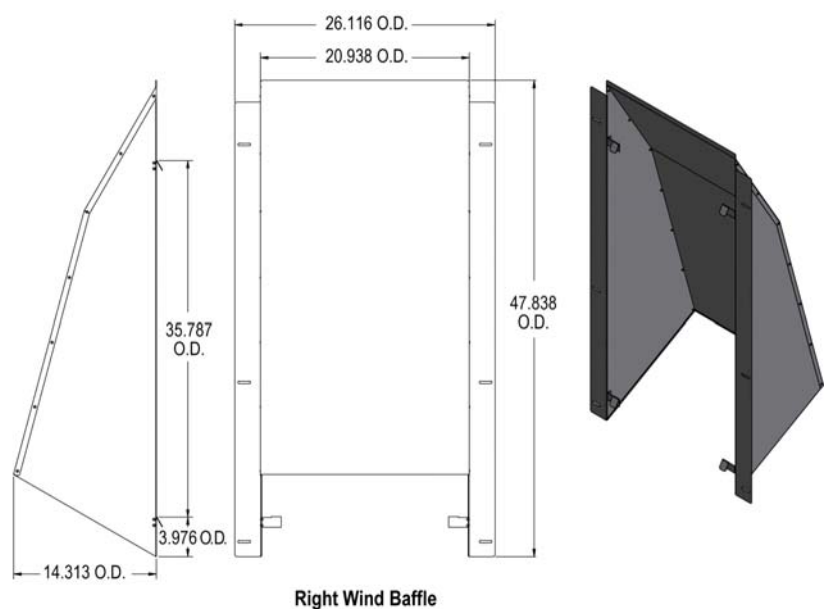

Right Wind Baffle

Job Name/Location:

**ZLABKA52A**

**Low Ambient Baffle Kit**






for Multi V 5 8-20 Ton Outdoor Units



**Tag #:**

**Date:**

**PO No.:**

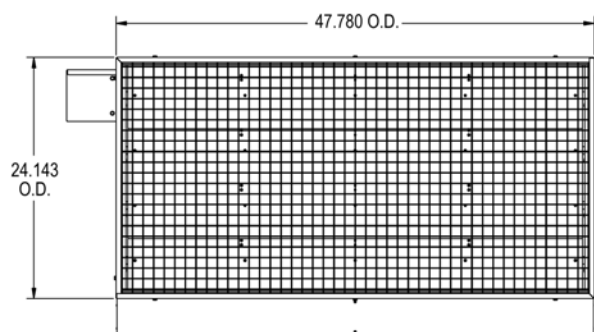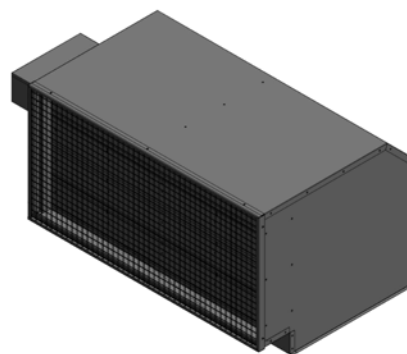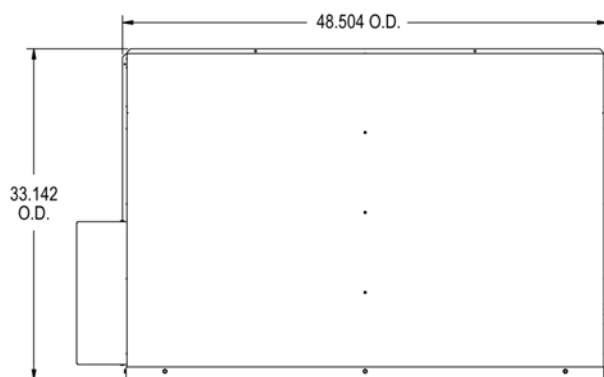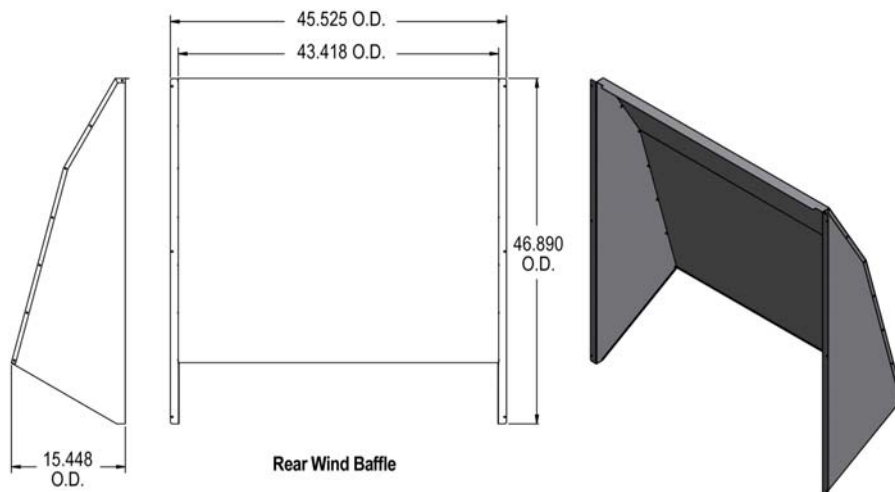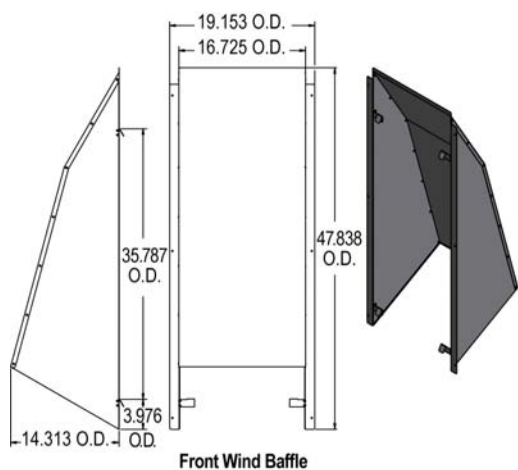

**Top Wind Baffle**

