




Multi-Position Air Handling Unit and A-Coil

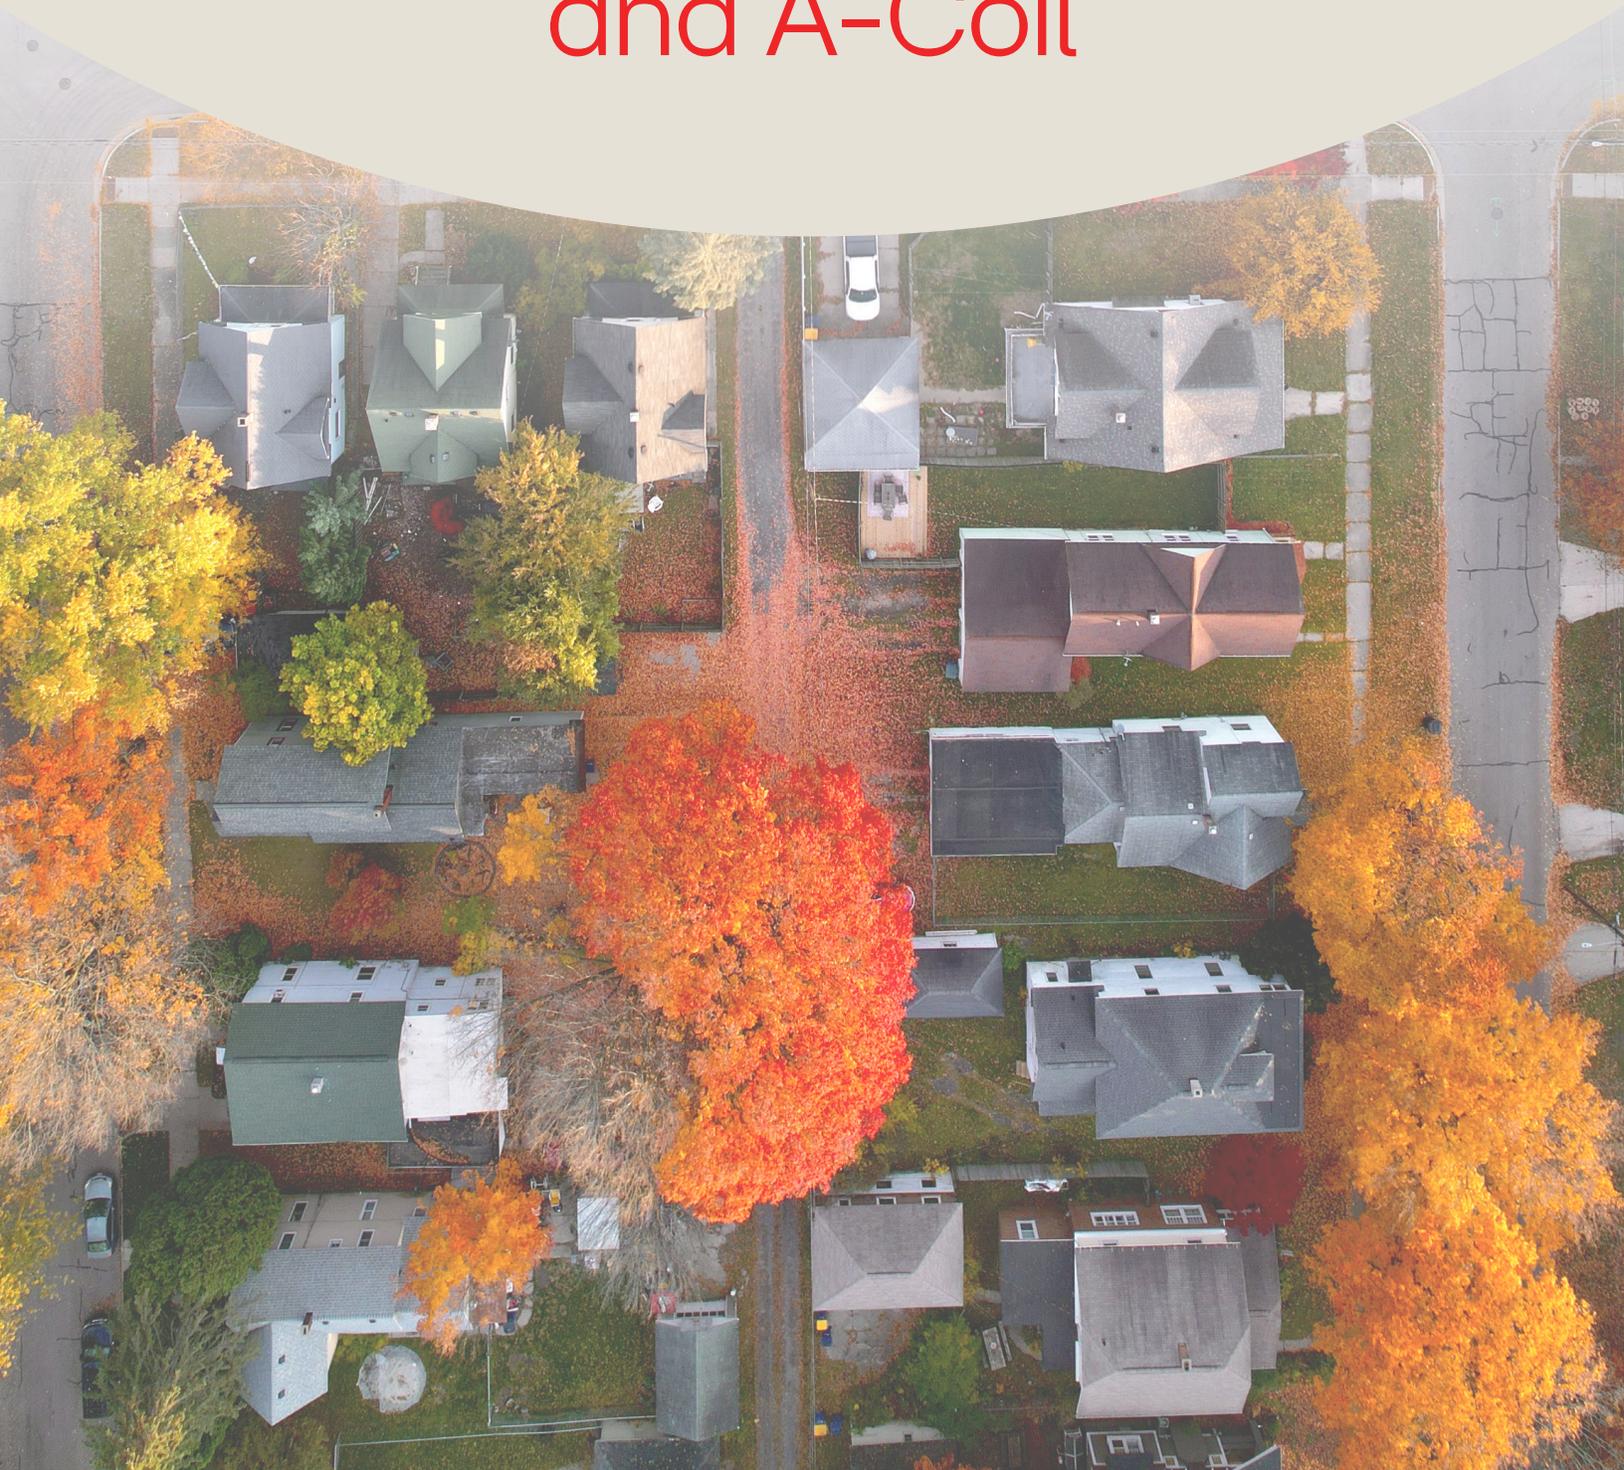

Why LG

Experience the LG Difference

LG is a global leader in HVAC, delivering high-quality heating and cooling solutions for homes and businesses. Whether it's a single-zone system for a homeowner or a large-scale commercial setup, LG provides reliable, energy-efficient options to keep spaces comfortable year-round.

Performance You Can Count On

From our industry-leading inverter technology to the powerful heating performance of **LGRED**[®], our solutions are designed for superior performance, keeping homeowners comfortable in any season.

Flexible Solution

Every home and project is different, which is why LG offers a wide range of product types—including ducted, duct-free, and hybrid options in single and multi zone configurations. Whether it's a new build or a retrofit, there's an LG system that fits.

Energy Efficiency That Pays Off

Many LG units are ENERGY STAR[®] certified and may qualify for rebates, helping homeowners reduce upfront costs. Plus, with efficient operation, they can help lower energy bills over time.

Smart Connectivity

With Wi-Fi-enabled indoor units and the LG ThinQ[®] app, homeowners can control their comfort from anywhere. And for even more convenience, LG products work with Amazon Alexa[®] and Google Assistant[™] for voice control.

A Brand Homeowners Trust

From appliances to entertainment, LG is a name people know and trust. That same commitment to innovation and quality extends to our HVAC solutions, delivering comfort and performance backed by a brand with a strong reputation.



LG's Multi-Position Air Handling Unit and A-Coil



These products offer year-round comfort with inverter-driven technology that optimizes energy use while maintaining consistent temperatures, even in extreme climates. Designed for flexibility, they accommodate various installation needs, whether for new construction or retrofit applications, providing options for most any home. With quiet operation, smart connectivity through the LG ThinQ® app, and eco-friendly refrigerants like R-32, these units deliver superior performance while keeping energy costs low. Plus, built-in features like tool-free filter access, an embedded Electronic Expansion Valve (EEV) for MPAHU and an embedded Thermal Expansion Valve (TXV) for A-Coil, and a refrigerant detection sensor enhance convenience, safety, and efficiency. Whether upgrading an existing system or installing a new one, LG's ducted family of products provide the perfect balance of innovation, sustainability, and comfort.



Efficiency & Performance:

- **Inverter Technology:** Optimizes energy use for consistent heating and cooling.
- **Cold Climate Capabilities:** Select models with **LGRED**® technology provide 100% heating capacity down to 5 °F and reliable operation down to -13 °F.
- **Low Sound Operation:** Advanced fan design provides quiet performance for a more comfortable home environment.


Smart and Flexible Design

- **Multi-Position Installation:** Supports upflow, downflow, and horizontal configurations for easy integration.
- **Compact A-Coil Option:** Space-saving design fits tight installation spaces without sacrificing efficiency.
- **Smart Connectivity:** Control some units remotely with the LG ThinQ® app and voice assistants like Alexa® and Google Assistant™.

Cost Savings & Sustainability

- **ENERGY STAR® Certified Models:** Many units qualify for rebates and incentives to lower upfront costs.
- **Low-GWP Refrigerants:** Uses R-32 refrigerant for lower environmental impact.
- **Dual-Fuel Compatibility:** The LG A-Coil works with most existing gas furnaces, simplifying dual fuel upgrades and allowing for optimized heating performance and fuel selection.

U.S. Climate Zones

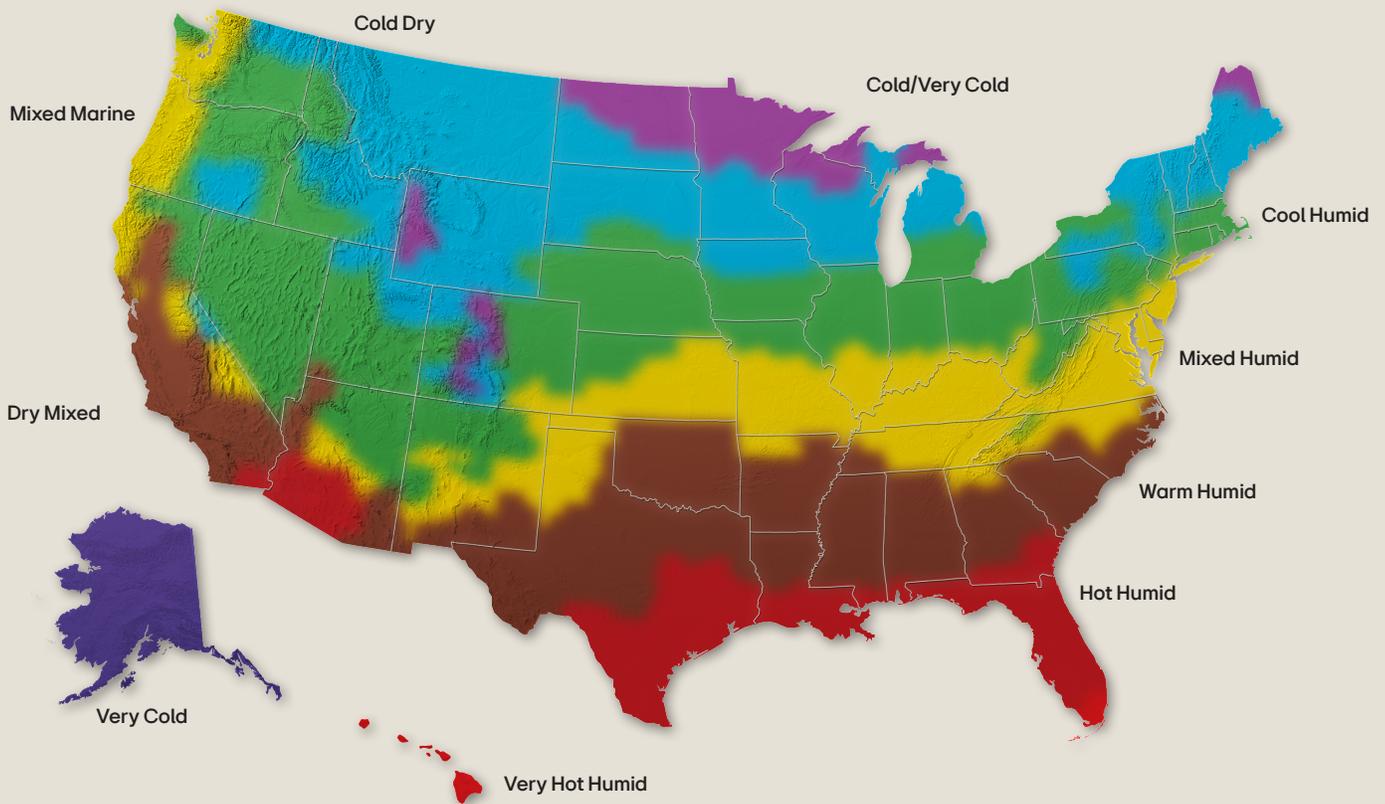

Based on: Climate Zone Map from IECC 2021

North Options

- **Heat Pump** - **LGRED°** Select models provide 100% heating capacity down to 5 °F and reliable operation down to -13 °F
- **Heat Pump** - **LGRED°** + Electric Heater
- **Dual Fuel** - **LGRED°** + A-Coil added onto a current gas furnace
- **Dual Fuel** - **LGRED°** + A-Coil / Furnace

South Options

- **Heat Pump** - High Efficiency Multi-Position Air Handling Units
- **Dual Fuel** - High Efficiency Heat Pump + A-Coil + existing Furnace
- **Heat Pump** - Contractor Value (CV) Multi-Position Air Handling Unit

Multi-Position Air Handling Unit

The LG Multi-Position Air Handling Unit (MPAHU), an essential component of our advanced inverter heat pump solution, provides a single source for both heating and cooling needs. This versatile unit can replace traditional furnaces and offers flexible installation options, making it ideal for both new and retrofit construction.

Innovative Coil Design: The factory-built indoor unit coils feature aluminum fins mechanically bonded to copper tubing, helping ensure efficient heat transfer. The factory pressure tests at least two coils and installs a condensate pan to provide reliability and performance.

Durable Casing: Constructed from 22-gauge metal with a high-gloss baked enamel finish, the casing is designed to be concealed behind a wall or above a finished ceiling. It includes 1/2-inch polystyrene fiber insulation on cold surfaces and access panels, reinforced foil-faced covering, and gasket seals to minimize air leaks.


Flexible Airflow Configurations: Capable of operating in vertical upflow, vertical downflow, horizontal left discharge, or horizontal right discharge configurations, this unit meets diverse installation needs. Vertical downflow operation requires an optional conversion kit, and the unit can also accommodate an internal LG electrical strip heater.

Advanced Fan Assembly and Control: The integral fan assembly features galvanized steel housing and a forward curve fan wheel, driven by an BLDC (Brushless Digitally Controlled) fan for constant cubic feet per minute (CFM) delivery regardless of external static pressure. The fan speed is microprocessor-controlled with Low, Med, High, and Auto settings for both cooling and heating modes, ensuring optimal performance.

Efficient Filter Assembly: The unit includes a filter rack designed to hold a standard filter, with a guide for centering filters and front access for easy maintenance.

Microprocessor Control and Connectivity: An integrated control board ensures communication with the outdoor unit, storing all operational parameters in non-volatile memory. The control board can be connected to the outdoor unit via a field-supplied communication cable, and an optional Wi-Fi module is available for smart device control using the LG ThinQ® app.


Effective Condensate Management: Designed for gravity draining of condensate, helps provide efficient moisture management.

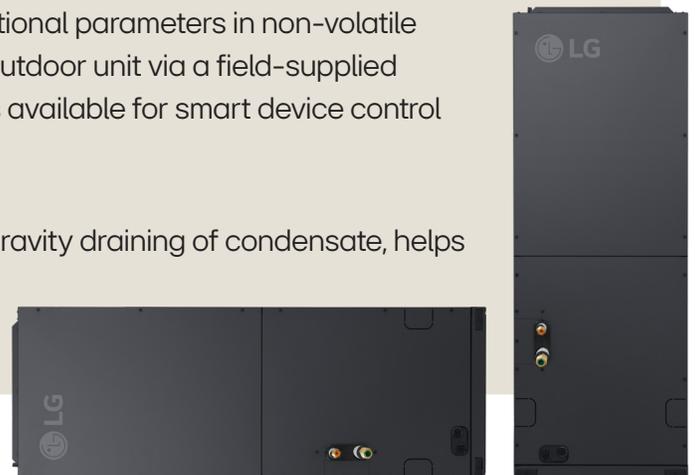

Multi-Position Air Handling Unit



LG ThinQ®: Control and monitor from anywhere, anytime*

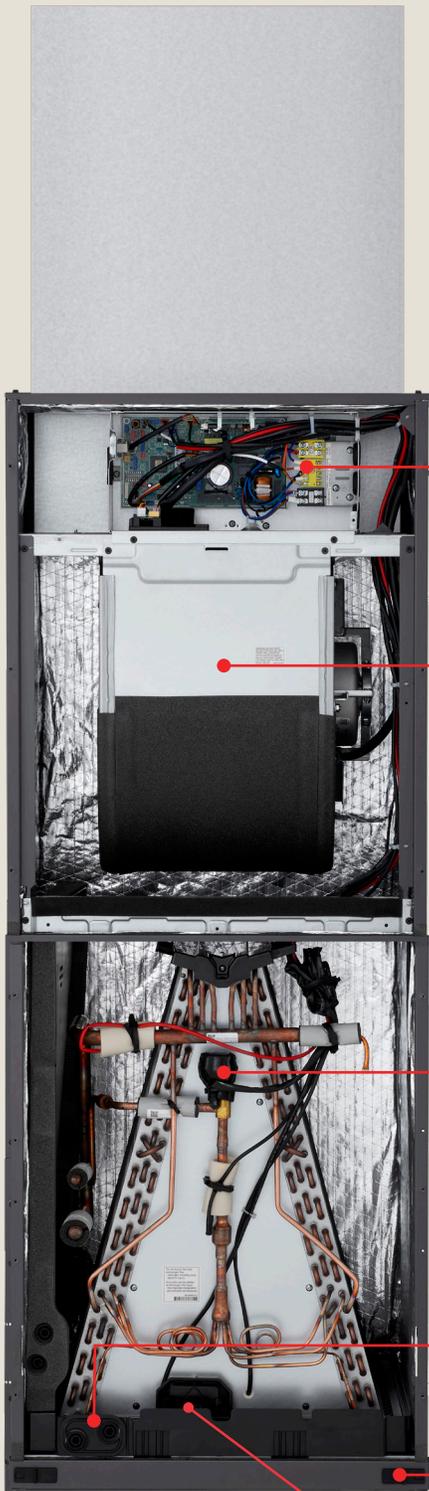


Connectivity of Third-Party Accessories: Embedded 24V transformer for easy integration

Slide-Out Fan: Easy fan motor replacement for faster maintenance

Embedded EEV: Integrated electronic expansion valve in both indoor and outdoor units

Improved Drain Hole: Compatible with U-trap drain hoses for better drainage


Tool-Free Filter Access: Quick and easy filter replacement, no screws needed



R-32 Refrigerant Leakage Detector Embedded: Built-in refrigerant monitoring

Embedded Circuit Breaker: No extra circuit breaker needed for electric heater

Various Heater Control: Adjusts heating automatically based on weather conditions

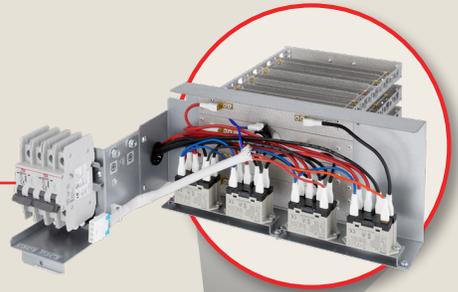

Smart, Quiet, and Flexible Comfort

The LG Multi-Position Air Handling Unit is designed to meet modern needs. With ThinQ™ technology, users can easily control and monitor the unit remotely from anywhere at any time*, providing maximum flexibility. Its innovative fan design contributes to quiet operation, making it ideal for quiet spaces. The sleek, stylish appearance adds a contemporary touch, allowing the unit to blend nicely into the home. This air handler prioritizes energy efficiency and reliability, featuring airtight construction that meets California Title 24 air leakage standards. With strong duct performance and a static pressure of 1 in. W.G., it delivers consistent airflow. The additional duct installation space simplifies the setup process. Furthermore, the four-way multi-position flexibility offers a variety of installation options, making this product an excellent choice for nearly any application.



Flexible Setup


The LG Multi-Position Air Handling Unit features convertible vertical upflow, downflow, or horizontal air distribution, allowing for flexible installation. With this four-way configurable unit, homeowners who prefer traditional ducted infrastructure can still benefit from inverter technology. Contractors can install it in a way that best suits the application. Downflow kit required for downflow installation.















Both the outdoor unit and indoor unit have an Electronic Expansion Valve (EEV)


Optimized performance and energy saving

The enhanced Multi-Position Air Handling Unit includes Electronic Expansion Valves (EEV). EEVs in both the outdoor and Air Handling Units improve the system's efficiency and precision in temperature control, leading to optimized performance and potential energy savings.

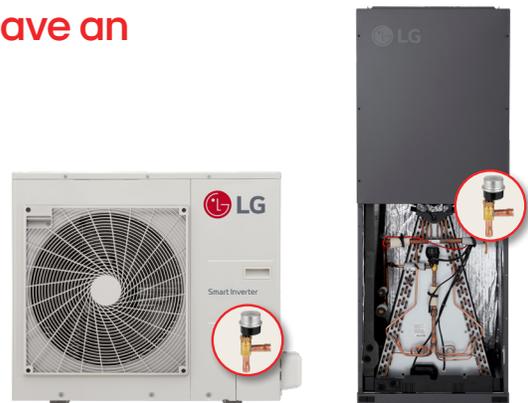

Capacity	12 kBtu/h	18 kBtu/h	24 kBtu/h	30 kBtu/h	36 kBtu/h	42 kBtu/h	48 kBtu/h
Indoor Unit	KNSLB121A	KNSLA181A	KNSLA241A	KNSLA301A	KNSLA361A	KNSLB421A	KNSLB481A
 							
Outdoor Unit LGRED°	KUSXA121A	KUSXA181A	KUSXA241A	KUSXA301A	KUSXA361A	KUSXA422A	KUSXA482A
							

Capacity	12 kBtu/h	18 kBtu/h	24 kBtu/h	30 kBtu/h	36 kBtu/h	42 kBtu/h	48 kBtu/h	60 kBtu/h
Indoor Unit	KNSLB121A	KNSLB181A	KNSLB241A	KNSLB301A	KNSLB361A	KNSLB421A	KNSLB481A	KNSLB601A
 								
Outdoor Unit High Efficiency	KUSXB121A	KUSXB181A	KUSXB241A	KUSXB301A	KUSXB361A	KUSXB421A	KUSXB481A	KUSXB601A
								

Capacity	18 kBtu/h	24 kBtu/h	30 kBtu/h	36 kBtu/h	42 kBtu/h	48 kBtu/h	60 kBtu/h
Indoor Unit	KNSLE182A	KNSLE242A	KNSLE302A	KNSLE362A	KNSLE422A	KNSLE482A	KNSLE602A
							
Outdoor Unit Contractor Value (CV)	KUSXE181A	KUSXE241A	KUSXE301A	KUSXE361A	KUSXE421A	KUSXE481A	KUSXE601A
							

ENERGY STAR® is a joint program of the U.S. Environmental Protection Agency (EPA) and the U.S. Department of Energy (DOE) created to promote energy-efficient products and practices. The ENERGY STAR® logo helps homeowners identify which products meet energy efficiency performance levels set by U.S. EPA and U.S. DOE. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps (excluding ductless systems) must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov.

Select LG air conditioning systems may make homeowners eligible for equipment-related tax benefits and credits. Visit <https://lghvac.com/homeowners-resources/rebates-incentives/> to see if your LG Air Conditioning System qualifies.

For the most up-to-date list of ENERGY STAR® models, visit the AHRI Directory at ahridirectory.org.




LG A-Coil

Upgrade your home's heating and cooling system with the LG A-Coil. Designed for efficient performance, easy installation, and long-term reliability, the LG A-Coil is compatible with existing gas furnaces and optimizes comfort in any climate. With multi-position installation and AHRI-rated efficiency, the LG A-Coil delivers year-round comfort while supporting a dual-fuel system for reduced fossil fuel use and lower emissions. Its built-in Thermal Expansion Valve (TXV) and R-32 refrigerant detection sensor enhance performance.

The LG A-Coil features a compact, low-height design, making it a space-saving option for various installations. It works with both standard and **LGRED°** outdoor units, giving homeowners flexible options based on their climate needs. For those in colder regions, **LGRED°** outdoor units deliver high-performance heating even in extreme cold temperatures, providing reliable comfort in sub-zero conditions.

With AHRI certification and compatibility with high Annual Fuel Utilization Efficiency (AFUE) rated gas furnaces, the LG A-Coil helps homeowners achieve optimal heating performance and potential energy savings.

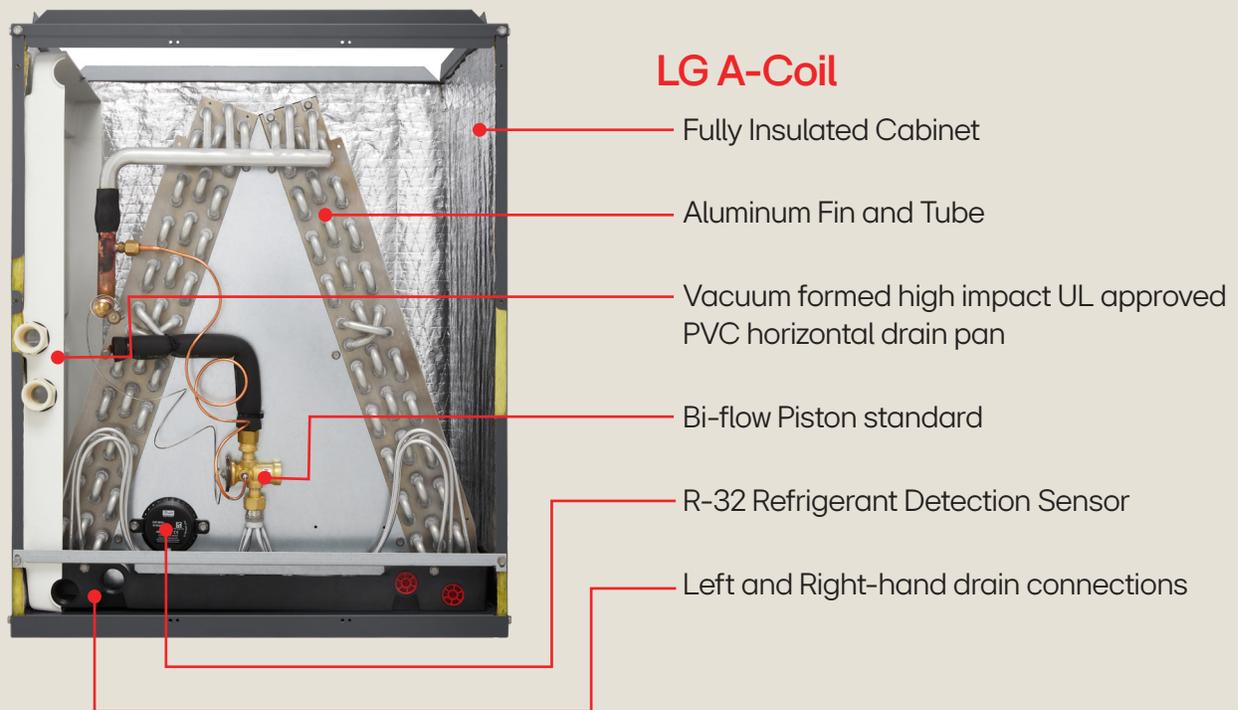


Key Features:

- **Compact, Space-Saving Design:** Low height for easier installation in tight spaces.
- **Flexible Installation:** Supports upflow, downflow, and horizontal configurations.
- **Energy Efficient:** AHRI-rated for compatibility with heat pump systems.
- **LGRED° Compatibility:** Works with LGRED° outdoor units for reliable cold-climate heating.
- **Cost Savings:** Works with existing gas furnaces, reducing upgrade costs.
- **Reliable Performance:** Features a durable aluminum coil for long-lasting operation.
- **Smart Design:** Includes a built-in Thermal Expansion Valve (TXV) and plenum flange.
- **Sustainable Comfort:** Supports dual-fuel systems for lower gas usage and reduced emissions.
- **AHRI Certified and AFUE Compatible:** Works with high-AFUE rated gas furnaces to maximize heating efficiency.
- **Potential ENERGY STAR® Qualification:** Select models may qualify for ENERGY STAR® or ENERGY STAR® Cold Climate, depending on specifications.


Size and Positioning:

LG's high efficiency Multi-Position A-Coil and cabinet is designed to be installed with any gas furnace. The LG A-Coil's compact design makes installation easier, especially in tight spaces. With a height range of 24 to 34 inches, it provides more flexibility for a variety of applications without sacrificing performance.

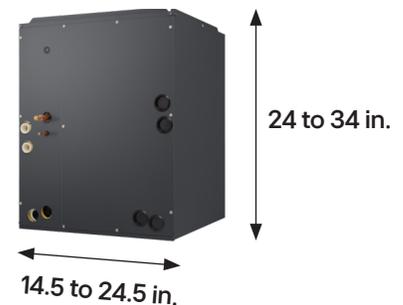

Flexible Installation:

Designed for versatility, our unit can be installed in either a vertical or horizontal configuration to fit your space. The A-Coil supports vertical up-flow, down-flow, or horizontal air distribution, ensuring seamless integration into any home layout.

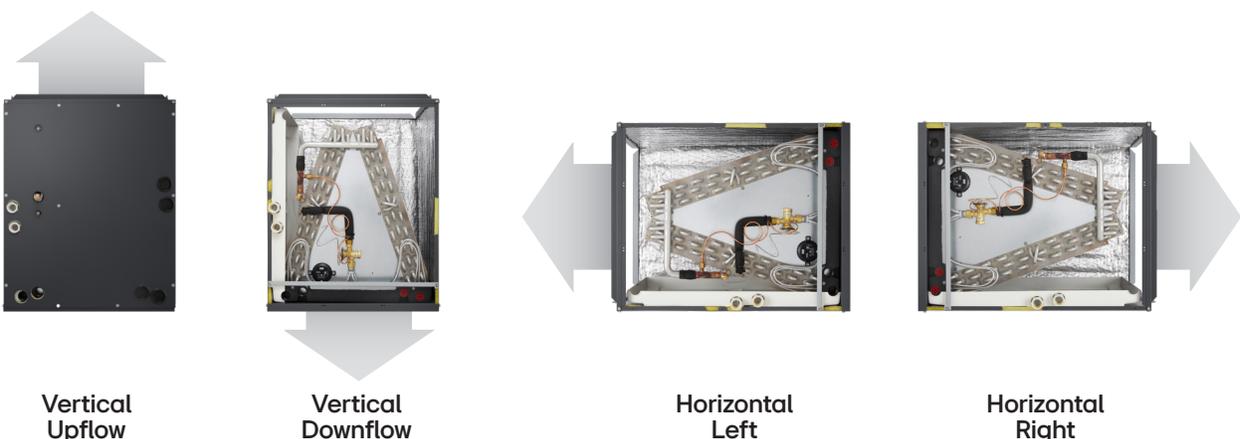



	Capacity (kBtu/h)	18		24		30	36		42	48		60	
		14.5"	17.5"	17.5"	17.5"	17.5"	17.5"	21"	21"	21"	24.5"	21"	24.5"
LGRED°	Indoor Unit	LKMMMA18A1	LKMMMA18B1	LKMMMA24B1	LKMMMA24B1	LKMMMA30B1	LKMMMA36B1	LKMMMA36C1	LKMMMA42C1	LKMMMA48C1	LKMMMA48D1	NA	NA
	Outdoor Unit	KUSXA181A	KUSXA181A	KUSXA241A	KUSXA301A	KUSXA301A	KUSXA361A	KUSXA361A	KUSXA422A	KUSXA482A	KUSXA482A	NA	NA
	ENERGY STAR® North	✓✓	✓✓	-	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	Not Applicable	Not Applicable
	ENERGY STAR® South	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	Not Applicable	Not Applicable
	Tax Credit	-	-	-	-	-	-	Both	Both	-	Both	Not Applicable	Not Applicable
High Efficiency	Indoor Unit	LKMMMA18A1	LKMMMA18B1	LKMMMA24B1	LKMMMA24B1	LKMMMA30B1	LKMMMA36B1	LKMMMA36C1	LKMMMA42C1	LKMMMA48C1	LKMMMA48C1	LKMMMA48D1	LKMMMA60C1
	Outdoor Unit	KUSXB181A	KUSXB181A	KUSXB241A	KUSXB241A	KUSXB301A	KUSXB361A	KUSXB361A	KUSXB421A	KUSXB481A	KUSXB601A	KUSXB481A	KUSXB601A
	ENERGY STAR® North	-	-	✓✓	✓✓	-	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓
	ENERGY STAR® South	-	✓	✓	✓	-	✓	✓	✓	-	✓	-	-



ENERGY STAR® is a joint program of the U.S. Environmental Protection Agency (EPA) and the U.S. Department of Energy (DOE) created to promote energy-efficient products and practices. The ENERGY STAR® logo helps homeowners identify which products meet energy efficiency performance levels set by U.S. EPA and U.S. DOE. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps (excluding ductless systems) must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov.

Select LG air conditioning systems may make homeowners eligible for equipment-related tax benefits and credits. Visit <https://lghvac.com/homeowners-resources/rebates-incentives/> to see if your LG Air Conditioning System qualifies.

For the most up-to-date list of ENERGY STAR® models, visit the AHRI Directory at ahridirectory.org.








LG's Advanced Outdoor Unit Technology

R1 Compressor™ technology, in select models, offers advanced efficiency, reliability, and operational range due in part to the enhanced tilting motion of the scroll.

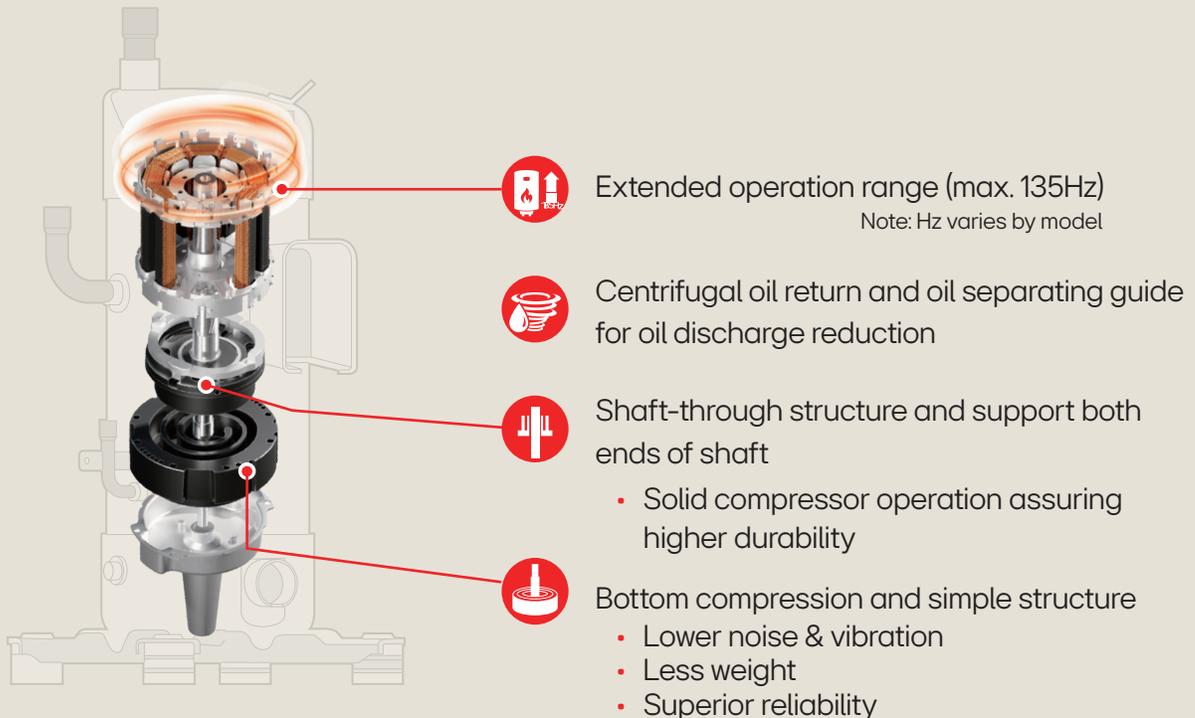

Highly Efficient Heating and Cooling


The LG Inverter Heat Pump delivers high-efficiency heating and cooling, using inverter compressors to optimize refrigerant flow and reduce energy consumption, even in extreme temperatures. With a wide operating range and a low-sound design, it enhances comfort while maintaining a smaller footprint than traditional unitary outdoor units.

The LG R1 Compressor stands out as a breakthrough in HVAC technology, merging the benefits of both scroll and rotary compressors for enhanced efficiency, durability, and performance. Its shaft-through structure minimizes internal pressure loss, while its hybrid scroll design optimizes energy use and reduces noise. The variable-speed operation ensures precise performance adjustments, leading to potential energy savings. Additionally, the bottom compression design improves oil circulation, enhancing long-term reliability.

LG's Smart Injection is a proprietary technology that optimizes refrigerant phase management for superior heating performance. Unlike traditional Vapor Injection, which injects refrigerant vapor mid-cycle to boost output in extreme cold, Smart Injection separates gaseous refrigerants from the heat exchanger, so that only denser liquid-phase refrigerant enters the compressor. This increases refrigerant flow density without adding extra workload to the compressor, leading to higher heating capacity and better efficiency.

When paired with some **LGRED°** models, Heat Technology delivers 100% heating capacity at 5 °F and reliable operation down to -13 °F. LG's outdoor HVAC units set a new standard for cold-climate performance. **LGRED°** ensures that heating remains powerful and efficient even in extreme temperatures, making it ideal for homeowners in harsh winter conditions. By integrating the R1 Compressor, Smart Injection, Vapor Injection, and **LGRED°** Heat Technology, LG's outdoor HVAC units ensure heating in extreme cold, potential energy savings without sacrificing power, and quieter operation compared to traditional systems. The result is an HVAC solution that delivers efficiency, reliability, and comfort, making LG a top choice for homeowners seeking cutting-edge in heating and cooling technology.


Note: Not all models include Smart Injection, Vapor Injection or the R1 Compressor.

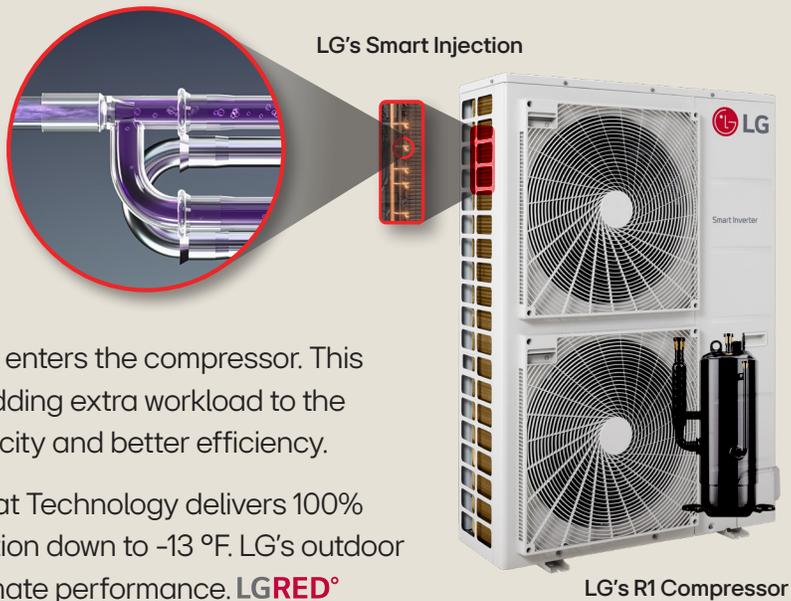

Embedded Communication Kit

The A-Coil Embedded Communication Kit enables coordination between the A-Coil, gas furnace, and heat pump, creating a true dual-fuel system. Built into all compatible outdoor units, the kit continuously monitors environmental conditions via the outdoor unit and system performance to determine whether the gas furnace or heat pump is the most efficient heating source at any given time. This intelligent operation brings energy efficiency, enhances comfort, and ensures seamless performance.

- **Embedded:** The Communication Kit is built into all compatible outdoor units.
- **Compatibility:** Connects easily to your existing gas furnace.
- **Cost Savings:** No need to purchase extra accessories.
- **Convenience:** Saves installation space with an embedded design.

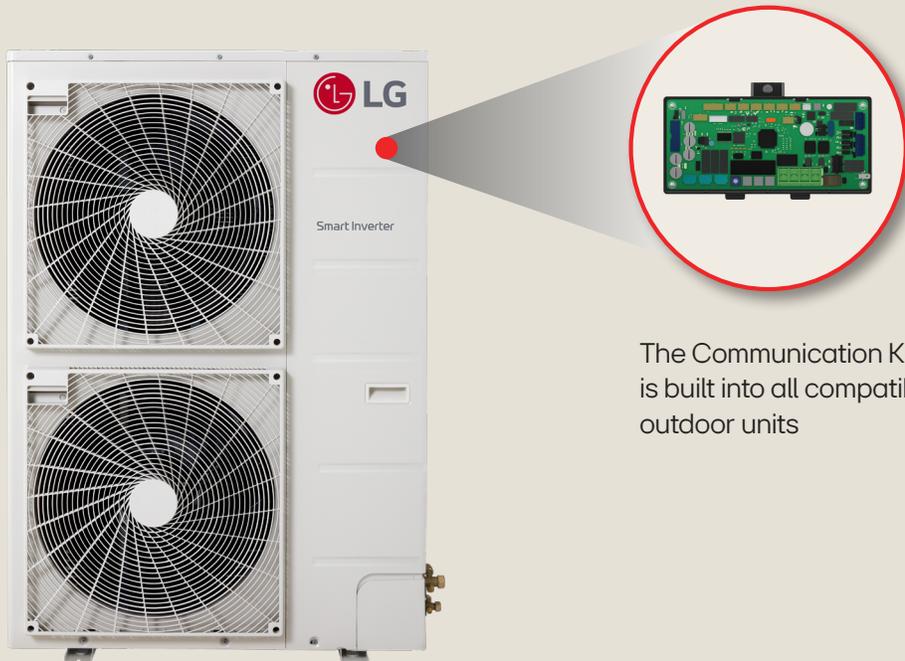

The Communication Kit is built into all compatible outdoor units





LG ThinQ®

Whenever, wherever, and no matter how many HVAC units you have, LG ThinQ® lets you easily access and control your heating and cooling solution from your compatible smart device*.

Using Wi-Fi, LG ThinQ® links smart products together so that they can work in unison to make your home smarter and more connected. The LG ThinQ® app allows you to control the comfort of each individual area of the home without sacrificing efficiency. Its Smart Diagnosis™ function allows you to troubleshoot problems. Additionally, you can receive maintenance alerts to wash each indoor unit filter based on an established schedule. You can also connect to both Amazon Alexa® and Google Assistant™ for voice-activated convenience.



New levels of control and convenience simplify everyday life and free up time so that you can stay focused on what matters.

*Requires Internet, Wi-Fi, or cellular access.

Specification Tables

Multi-Position Air Handling Unit



Specification			12 kBtu/h	18 kBtu/h	24 kBtu/h	30 kBtu/h
System			KSSLB121A	KNSLB181A	KNSLB241A	KSSLB301A
Indoor Unit			KNSLB121A	KNSLB181A	KNSLB241A	KNSLB301A
Outdoor Unit			KUSXB121A	KUSXB181A	KUSXB241A	KUSXB301A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	4,200-12,000-15,000	7,200-18,000-24,000	9,600-23,200-30,000	12,000-27,000-32,500
	Heating Capacity (Min-Rated-Max)	Btu/h	6,000-15,000-18,000	8,000-20,000-24,000	10,800-27,000-30,000	13,600-34,000-36,600
	Max Heating Capacity at 17 °F	Btu/h	13,100	23,000	25,000	31,500
	Max Heating Capacity at 5 °F	Btu/h	10,500	22,000	22,000	30,000
	Max Heating Capacity at -4 °F	Btu/h	10,000	20,000	21,000	26,000
	SEER2		16.20	17.50	17.50	17.00
	EER2		12.20	13.50	12.00	11.70
	HSPF2		9.50	10.00	9.70	9.60
	COP at 47°F		3.82	3.86	3.60	3.70
Power	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
	Cooling Power Input (Min-Rated-Max)	kW	0.45-0.99-1.50	0.45-1.33-3.25	0.58-1.93-3.26	0.72-2.31-2.58
	Heating Power Input (Min-Rated-Max)	kW	0.40-1.15-1.93	0.50-1.52-2.37	0.65-2.20-3.11	0.80-2.69-3.50
	MCA / MOP (ODU)	A	13.4 / 30	16.0 / 30	16.0 / 30	19.1 / 35
	Power Supply Wiring (ODU)	No. x AWG	3 x 12	3 x 12	3 x 12	3 x 10
	Power / Com Wiring (ODU to IDU)	No. x AWG	3 x 14 / 2 x 18	3 x 14 / 2 x 18	3 x 14 / 2 x 18	3 x 14 / 2 x 18
	Rated Amps	A	2.8	2.8	2.8	3.4
Operation Range	ODU Operation Range Cooling	°F WB	5 to 118	5 to 118	5 to 118	5 to 118
	ODU Operation Range Heating	°F DB	-4 to 64	-4 to 64	-4 to 64	-4 to 64
Dimensions	IDU Dimensions (W x H x D)	in	18 x 48 ^{-21/32} x 21 ^{-3/8}	18 x 48 ^{-21/32} x 21 ^{-3/8}	18 x 48 ^{-21/32} x 21 ^{-3/8}	21 x 55 ^{-3/16} x 21 ^{-3/8}
	ODU Dimensions (W x H x D)	in	30 ^{-5/16} x 21 ^{-15/32} x 11 ^{-11/32}	37 ^{-13/32} x 32 ^{-27/32} x 13	37 ^{-13/32} x 32 ^{-27/32} x 13	37 ^{-13/32} x 32 ^{-27/32} x 13
Weight	IDU Weight (Net / Shipping)	lbs	116 / 129	116 / 129	116 / 129	139 / 154
	ODU Weight (Net / Shipping)	lbs	75.0 / 79.4	136 / 154.3	136 / 154.3	141.1 / 159.4
Unit Data	Airflow Rate Cooling (H / M / L)	CFM	500 / 460 / 420	600 / 510 / 440	800 / 700 / 580	875 / 750 / 630
	Airflow Rate Heating (H / M / L)	CFM	500 / 460 / 420	600 / 510 / 440	800 / 700 / 580	875 / 750 / 630
	Dehumidification	pts/hr	1.27	2.75	4.23	5.6
	Compressor Type		Twin Rotary x 1	Twin Rotary x 1	Twin Rotary x 1	R1 Scroll x 1
	Refrigerant Type		R-32	R-32	R-32	R-32
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	49 / 52	48 / 52	48 / 52	52 / 54
	Liquid Pipe (Connection / Pipe Size)	in	1/4 Flare / 1/4 Flare	3/8 Flare / 3/8 Flare	3/8 Flare / 3/8 Flare	3/8 Flare / 3/8 Flare
Piping	Vapor Pipe (Connection / Pipe Size)	in	3/8 Flare / 3/8 Flare	5/8 Flare / 5/8 Flare	5/8 Flare / 5/8 Flare	5/8 Flare / 5/8 Flare
	Pipe Length (Min / Max)	ft	16.4 / 65.6	16.4 / 65.6	16.4 / 65.6	16.4 / 164
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6
	Max Pipe Elevation	ft	49.2	98.4	98.4	98.4
	Pre Charge	Oz	38.8	67	67	67
	Additional Refrigerant	oz/ft	0.22	0.38	0.38	0.38
	Condensation Line (OD, ID)	in	1-1/4 / 1	1-1/4 / 1	1-1/4 / 1	1-1/4 / 1
	ENERGY STAR® / Cold Climate		Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

Multi-Position Air Handling Unit

Specification			36 kBtu/h	42 kBtu/h	48 kBtu/h	60 kBtu/h
System			KSSLB361A	KSSLB421A	KSSLB481A	KSSLB601A
Indoor Unit			KNSLB361A	KNSLB421A	KNSLB481A	KNSLB601A
Outdoor Unit			KUSXB361A	KUSXB421A	KUSXA481A	KUSXB601A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	14,400-33,000-39,000	17,000-42,000-48,000	18,000-45,500-53,000	20,500-52,500-60,500
	Heating Capacity (Min-Rated-Max)	Btu/h	16,000-40,000-43,000	18,000-46,000-51,800	19,000-50,000-54,000	21,500-56,500-61,000
	Max Heating Capacity at 17 °F	Btu/h	37,000	42,000	43,000	53,000
	Max Heating Capacity at 5 °F	Btu/h	33,000	38,500	38,500	45,000
	Max Heating Capacity at -4 °F	Btu/h	27,000	34,000	36,000	41,000
	SEER2		17.50	18.00	18.00	17.50
	EER2		11.80	11.70	11.70	12.00
	HSPF2		9.50	9.50	9.40	9.40
	COP at 47°F		3.55	3.66	3.66	3.78
Power	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
	Cooling Power Input (Min-Rated-Max)	kW	1.00-2.80-3.60	1.35-3.59-5.30	1.40-3.89-6.0	
	Heating Power Input (Min-Rated-Max)	kW	1.02-3.30-4.48	1.45-4.01-5.17	1.50-4.00-5.39	
	MCA / MOP (ODU)	A	32.0 / 35	32.0 / 40	32.0 / 40	32.0 / 40
	Power Supply Wiring (ODU)	No. x AWG	3 x 10	3 x 10	3 x 10	3 x 10
	Power / Com Wiring (ODU to IDU)	No. x AWG	3 x 14 / 2 x 18			
	Rated Amps	A	3.4	3.4	3.4	6.3
Operation Range	ODU Operation Range Cooling	°F WB	5 to 118	5 to 118	5 to 118	5 to 118
	ODU Operation Range Heating	°F DB	-4 to 64	-4 to 64	-4 to 64	-4 to 64
Dimensions	IDU Dimensions (W x H x D)	in	21 x 55 ^{-3/16} x 21 ^{-3/8}	21 x 55 ^{-3/16} x 21-3	21 x 55 ^{-3/16} x 21-3	25 x 55 ^{-3/16} x 21 ^{-3/8}
	ODU Dimensions (W x H x D)	in	37 ^{-13/32} x 32 ^{-27/32} x 13	37 ^{-13/32} x 32 ^{-27/32} x 13	37 ^{-13/32} x 54 ^{-11/32} x 13	37 ^{-13/32} x 54 ^{-11/32} x 13
Weight	IDU Weight (Net / Shipping)	lbs	139 / 154	146 / 160	146 / 160	153 / 169
	ODU Weight (Net / Shipping)	lbs	190.2 / 214.3	190.2 / 214.3	190.2 / 214.3	190.2 / 214.3
Unit Data	Airflow Rate Cooling (H / M / L)	CFM	1,050 / 980 / 900	1,225 / 1,100 / 1,000	1,400 / 1,200 / 1,070	1,750 / 1,575 / 1,400
	Airflow Rate Heating (H / M / L)	CFM	1,050 / 980 / 900	1,225 / 1,100 / 1,000	1,400 / 1,200 / 1,070	1,750 / 1,575 / 1,400
	Dehumidification	pts/hr	7.17	7.9	8.06	9.10
	Compressor Type		R1 Scroll x 1			
	Refrigerant Type		R-32	R-32	R-32	R-32
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	52 / 54	54 / 56	54 / 56	54 / 56
	Liquid Pipe (Connection / Pipe Size)	in	³ / ₈ Flare / ³ / ₈ Flare	³ / ₈ Flare / ³ / ₈ Flare	³ / ₈ Flare / ³ / ₈ Flare	³ / ₈ Flare / ³ / ₈ Flare
Piping	Vapor Pipe (Connection / Pipe Size)	in	⁵ / ₈ Flare / ⁵ / ₈ Flare	⁵ / ₈ Flare / ⁵ / ₈ Flare	⁵ / ₈ Flare / ⁵ / ₈ Flare	³ / ₄ Flare / ³ / ₄ Flare
	Pipe Length (Min / Max)	ft	16.4 / 246	16.4 / 246	16.4 / 246	16.4 / 246
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6
	Max Pipe Elevation	ft	98.4	98.4	98.4	98.4
	Pre Charge	Oz	106	106	106	120
	Additional Refrigerant	oz/ft	0.43	0.43	0.43	0.43
	Condensation Line (OD, ID)	in	1 ⁻¹ / ₄ / 1			
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

Multi-Position Air Handling Unit with LGRED°



Specification			12 kBtu/h	18 kBtu/h	24 kBtu/h	30 kBtu/h	
LGRED° System			Indoor Unit	KSSLA121A	KSSLA181A	KSSLA241A	KSSLA301A
			Outdoor Unit	KNSLB121A	KNSLA181A	KNSLA241A	KNSLA301A
			KUSXA121A	KUSXA181A	KUSXA241A	KUSXA301A	
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	5,000-12,500-17,500	7,200-18,000-24,800	9,600-24,000-30,000	12,000-30,000-36,000	
	Heating Capacity (Min-Rated-Max)	Btu/h	6,000-15,000-19,500	8,000-20,000-27,000	10,800-27,000-36,000	13,600-34,000-40,800	
	Max Heating Capacity at 17 °F	Btu/h	16,300	26,000	28,000	36,000	
	Max Heating Capacity at 5 °F	Btu/h	15,000	25,000	25,000	33,000	
	Max Heating Capacity at -4 °F	Btu/h	13,000	21,000	22,000	29,500	
	Max Heating Capacity at -13 °F	Btu/h	11,000	17,000	19,000	26,000	
	SEER2		17.00	17.50	17.50	18.20	
	EER2		13.30	13.50	12.50	13.50	
	HSPF2		9.80	10.00	10.00	9.80	
COP at 47°F		3.96	3.81	3.79	4.01		
Power	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	
	Cooling Power Input (Min-Rated-Max)	kW	0.31-0.94-1.95	0.45-1.33-2.76	0.55-1.92-3.00	0.71-2.22-4.18	
	Heating Power Input (Min-Rated-Max)	kW	0.36-1.11-2.38	0.50-1.54-3.30	0.65-2.08-4.40	0.78-2.49-3.90	
	MCA / MOP (ODU)	A	19.1 / 30	19.1 / 30	19.1 / 30	32.0 / 35	
	Power Supply Wiring (ODU)	No. x AWG	3 x 12	3 x 12	3 x 12	3 x 10	
	Power / Com Wiring (ODU to IDU)	No. x AWG	3 x 14 / 2 x 18	3 x 14 / 2 x 18	3 x 14 / 2 x 18	3 x 14 / 2 x 18	
	Rated Amps	A	2.8	2.8	2.8	3.4	
Operation Range	ODU Operation Range Cooling	°F WB	5 to 118	5 to 118	5 to 118	5 to 118	
	ODU Operation Range Heating	°F DB	-13 to 64	-13 to 64	-13 to 64	-13 to 64	
Dimensions	IDU Dimensions (W x H x D)	in	18 x 48 ⁻²¹ / ₃₂ x 21 ⁻³ / ₈	18 x 48 ⁻²¹ / ₃₂ x 21 ⁻³ / ₈	18 x 48 ⁻²¹ / ₃₂ x 21 ⁻³ / ₈		
	ODU Dimensions (W x H x D)	in	37 ⁻¹³ / ₃₂ x 32 ⁻²⁷ / ₃₂ x 13	37 ⁻¹³ / ₃₂ x 32 ⁻²⁷ / ₃₂ x 13	37 ⁻¹³ / ₃₂ x 32 ⁻²⁷ / ₃₂ x 13		
Weight	IDU Weight (Net / Shipping)	lbs	116 / 129	122 / 134	122 / 134		
	ODU Weight (Net / Shipping)	lbs	141.8 / 160.1	141.8 / 160.1	141.8 / 160.1		
Unit Data	Airflow Rate Cooling (H / M / L)	CFM	500 / 460 / 420	600 / 510 / 440	800 / 700 / 580		
	Airflow Rate Heating (H / M / L)	CFM	500 / 460 / 420	600 / 510 / 440	800 / 700 / 580		
	Dehumidification	pts/hr	1.83	2.75	4.23		
	Compressor Type		R1 Scroll x 1	R1 Scroll x 1	R1 Scroll x 1	R1 Scroll x 1	
	Refrigerant Type		R-32	R-32	R-32	R-32	
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	51 / 52	51 / 52	51 / 52		
Piping	Liquid Pipe (Connection / Pipe Size)	in	1/4 Flare / 1/4 Flare	3/8 Flare / 3/8 Flare	3/8 Flare / 3/8 Flare	3/8 Flare / 3/8 Flare	
	Vapor Pipe (Connection / Pipe Size)	in	3/8 Flare / 3/8 Flare	5/8 Flare / 5/8 Flare	5/8 Flare / 5/8 Flare	5/8 Flare / 5/8 Flare	
	Pipe Length (Min / Max)	ft	16.4 / 164	16.4 / 164	16.4 / 164	16.4 / 164	
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6	
	Max Pipe Elevation	ft	98.4	98.4	98.4	98.4	
	Pre Charge	Oz	67	67	67	67	
	Additional Refrigerant	oz/ft	0.38	0.38	0.38	0.38	
	Condensation LIne (OD, ID)	in	1 ⁻¹ / ₄ / 1	1 ⁻¹ / ₄ / 1	1 ⁻¹ / ₄ / 1	1 ⁻¹ / ₄ / 1	
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

Multi-Position Air Handling Unit with LGRED°

Specification			36 kBtu/h	42 kBtu/h	48 kBtu/h	
LGRED° System			Indoor Unit	KSSLA361A	KSSLA421A	KSSLA481A
			Indoor Unit	KNSLA361A	KNSLB421A	KNSLB481A
			Outdoor Unit	KUSXA361A	KUSXA422A	KUSXA482A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	14,000-33,000-44,000	16,800-42,000-50,000	18,400-46,000-55,000	
	Heating Capacity (Min-Rated-Max)	Btu/h	16,000-40,000-43,000	18,000-46,000-60,000	19,000-50,000-63,000	
	Max Heating Capacity at 17 °F	Btu/h	39,000	52,000	54,000	
	Max Heating Capacity at 5 °F	Btu/h	33,000	46,000	46,000	
	Max Heating Capacity at -4 °F	Btu/h	31,000	40,000	41,000	
	Max Heating Capacity at -13 °F	Btu/h	29,000	34,000	36,000	
	SEER2		18.20	19.00	19.00	
	EER2		13.00	12.50	12.30	
	HSPF2		9.60	9.80	9.60	
	COP at 47°F		3.79	3.70	3.91	
Power	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	
	Cooling Power Input (Min-Rated-Max)	kW	0.81-2.54-4.78	1.19-3.36-5.32	1.40-3.74-5.73	
	Heating Power Input (Min-Rated-Max)	kW	0.96-3.09-4.10	1.34-3.64-5.80	1.40-3.76-6.30	
	MCA / MOP (ODU)	A	32.0 / 35	32.0 / 40	32.0 / 40	
	Power Supply Wiring (ODU)	No. x AWG	3 x 10	3 x 10	3 x 10	
	Power / Com Wiring (ODU to IDU)	No. x AWG	3 x 14 / 2 x 18	3 x 14 / 2 x 18	3 x 14 / 2 x 18	
	Rated Amps	A	3.4	3.4	3.4	
Operation Range	ODU Operation Range Cooling	°F WB	5 to 118	5 to 118	5 to 118	
	ODU Operation Range Heating	°F DB	-13 to 64	-13 to 64	-13 to 64	
Dimensions	IDU Dimensions (W x H x D)	in	21 x 55- ³ / ₁₆ x 21- ³ / ₈	21 x 55- ³ / ₁₆ x 21- ³ / ₈	21 x 55- ³ / ₁₆ x 21- ³ / ₈	
	ODU Dimensions (W x H x D)	in	37- ¹³ / ₃₂ x 54- ¹¹ / ₃₂ x 13	37- ¹³ / ₃₂ x 54- ¹¹ / ₃₂ x 13	37- ¹³ / ₃₂ x 54- ¹¹ / ₃₂ x 13	
Weight	IDU Weight (Net / Shipping)	lbs	146 / 160	146 / 160	146 / 160	
	ODU Weight (Net / Shipping)	lbs	190.2 / 214.3	190.2 / 214.3	213.4 / 232.4	
Unit Data	Airflow Rate Cooling (H / M / L)	CFM	1,050 / 980 / 900	1,225 / 1,100 / 1,000	1,400 / 1,200 / 1,070	
	Airflow Rate Heating (H / M / L)	CFM	1,050 / 980 / 900	1,225 / 1,100 / 1,000	1,400 / 1,200 / 1,070	
	Dehumidification	pts/hr	6.9	7.9	8.64	
	Compressor Type		R1 Scroll x 1	R1 Scroll x 1	R1 Scroll x 1	
	Refrigerant Type		R-32	R-32	R-32	
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	52 / 54	54 / 56	54 / 56	
Piping	Liquid Pipe (Connection / Pipe Size)	in	³ / ₈ Flare / ³ / ₈ Flare	³ / ₈ Flare / ³ / ₈ Flare	³ / ₈ Flare / ³ / ₈ Flare	
	Vapor Pipe (Connection / Pipe Size)	in	⁵ / ₈ Flare / ⁵ / ₈ Flare	⁵ / ₈ Flare / ⁵ / ₈ Flare	⁵ / ₈ Flare / ⁵ / ₈ Flare	
	Pipe Length (Min / Max)	ft	16.4 / 246	16.4 / 246	16.4 / 246	
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	
	Max Pipe Elevation	ft	98.4	98.4	98.4	
	Pre Charge	Oz	106	120	106	
	Additional Refrigerant	oz/ft	0.43	0.43	0.43	
	Condensation Line (OD, ID)	in	1- ¹ / ₄ / 1	1- ¹ / ₄ / 1	1- ¹ / ₄ / 1	
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes	Yes / Yes	

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

Multi-Position Air Handling Unit - CV



Specification			18 kBtu/h	24 kBtu/h	30 kBtu/h	36 kBtu/h
		System	KSSLE182A	KSSLE242A	KSSLE302A	KSSLE362A
		Indoor Unit	KNSLE182A	KNSLE242A	KNSLE302A	KNSLE362A
		Outdoor Unit	KUSXE181A	KUSXE241A	KUSXE301A	KUSXE361A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	7,200-16,000-17,500	9,600-24,000-25,000	12,000-28,000-29,000	14,400-32,600-34,000
	Heating Capacity (Min-Rated-Max)	Btu/h	6,000-17,000-18,000	10,800-23,600-26,000	13,600-27,800-30,000	16,000-34,000-35,000
	Max Heating Capacity at 17 °F	Btu/h	12,430	17,570	20,500	24,570
	Max Heating Capacity at 5 °F	Btu/h	10,200	14,200	16,700	20,400
	SEER2		16.00	16.00	16.00	16.00
	EER2		9.80	10.00	10.00	9.80
	HSPF2		8.5	8.5	8.5	8.5
	COP at 47°F		3.50	3.40	3.50	3.30
	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
Power	Cooling Power Input (Min-Rated-Max)	kW	0.45-1.63-1.85	0.58-2.40-2.80	0.78-2.80-3.15	1.00-3.32-3.55
	Heating Power Input (Min-Rated-Max)	kW	0.40-1.42-1.90	0.65-2.03-2.45	0.80-2.33-2.80	1.02-3.02-3.20
	MCA / MOP (ODU)	A	12.9 / 15	15.4 / 25	16.6 / 25	19.5 / 25
	Power Supply Wiring (ODU)	No. x AWG	3 x 14	3 x 12	3 x 12	3 x 12
	Power / Com Wiring (ODU to IDU)	No. x AWG	3 x 14 / 2 x 18			
	Rated Amps	A	2.6	2.6	4.8	4.8
Operation Range	ODU Operation Range Cooling	°F WB	14 to 118	14 to 118	14 to 118	14 to 118
	ODU Operation Range Heating	°F DB	4 to 64	4 to 64	4 to 64	4 to 64
Dimensions	IDU Dimensions (W x H x D)	in	18 x 48 ^{-21/32} x 21 ^{-3/8}	18 x 48 ^{-21/32} x 21 ^{-3/8}	21 x 55 ^{-3/16} x 21 ^{-3/8}	21 x 55 ^{-3/16} x 21 ^{-3/8}
	ODU Dimensions (W x H x D)	in	30 ^{-5/16} x 21 ^{-15/32} x 11 ^{-11/32}	34 ^{-1/4} x 25 ^{-19/32} x 13	34 ^{-1/4} x 25 ^{-19/32} x 13	37 ^{-13/32} x 32 ^{-27/32} x 13
Weight	IDU Weight (Net / Shipping)	lbs	113 / 123	113 / 123	134 / 147	134 / 147
	ODU Weight (Net / Shipping)	lbs	70.5 / 75	92.6 / 103.6	92.6 / 103.6	128.5 / 144.6
Unit Data	Airflow Rate Cooling (H / M / L)	CFM	600 / 510 / 440	800 / 700 / 580	870 / 730 / 620	1,050 / 980 / 900
	Airflow Rate Heating (H / M / L)	CFM	600 / 510 / 440	800 / 700 / 580	870 / 730 / 620	1,050 / 980 / 900
	Dehumidification	pts/hr	2.75	4.23	5.6	7.17
	Compressor Type		Twin Rotary x 1			
Sound Pressure	Refrigerant Type		R-32	R-32	R-32	R-32
	Outdoor Max (Cool / Heat)	dB(A)	49 / 52	52 / 54	52 / 54	52 / 54
Piping	Liquid Pipe (Connection / Pipe Size)	in	³ / ₈ Flare / ³ / ₈ Flare	³ / ₈ Flare / ³ / ₈ Flare	³ / ₈ Flare / ³ / ₈ Braze	³ / ₈ Flare / ³ / ₈ Flare
	Vapor Pipe (Connection / Pipe Size)	in	⁵ / ₈ Flare / ⁵ / ₈ Flare	⁵ / ₈ Flare / ⁵ / ₈ Flare	⁵ / ₈ Flare / ⁵ / ₈ Braze	³ / ₄ Flare / ³ / ₄ Flare
	Pipe Length (Min / Max)	ft	16.4 / 65.6	16.4 / 65.6	16.4 / 98.4	16.4 / 98.4
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6
	Max Pipe Elevation	ft	49.2	49.2	49.2	49.2
	Pre Charge	Oz	38.8	49.38	49.38	70.55
	Additional Refrigerant	oz/ft	0.38	0.43	0.43	0.43
	Condensation Line (OD, ID)	in	³ / ₄	³ / ₄	³ / ₄	³ / ₄
ENERGY STAR® / Cold Climate			No / No	No / No	No / No	No / No

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

Multi-Position Air Handling Unit - CV

Specification			42 kBtu/h	48 kBtu/h	60 kBtu/h
		System	KSSLE422A	KSSLE482A	KSSLE602A
		Indoor Unit	KNSLE422A	KNSLE482A	KNSLE602A
		Outdoor Unit	KUSXE421A	KUSXA481A	KUSXE601A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	17,000-41,000-48,000	18,000-47,000-50,000	20,500-55,000-57,000
	Heating Capacity (Min-Rated-Max)	Btu/h	18,000-42,000-44,000	19,000-50,000-52,000	21,500-55,000-57,000
	Max Heating Capacity at 17 °F	Btu/h	30,570	36,290	39,860
	Max Heating Capacity at 5 °F	Btu/h	25,200	30,000	33,000
	SEER2		16.00	16.00	16.00
	EER2		8.20	10.00	10.00
	HSPF2		8.5	8.5	8.5
	COP at 47°F		3.20	3.20	3.20
Power	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
	Cooling Power Input (Min-Rated-Max)	kW	1.35-5.00-5.30	1.40-4.70-5.30	1.60-5.50-6.40
	Heating Power Input (Min-Rated-Max)	kW	1.45-3.85-4.20	1.50-4.57-5.10	1.60-5.50-6.40
	MCA / MOP (ODU)	A	30.1/ 35	30.7/ 40	30.7/ 40
	Power Supply Wiring (ODU)	No. x AWG	3 x 10	3 x 10	3 x 10
	Power / Com Wiring (ODU to IDU)	No. x AWG	3 x 14 / 2 x 18	3 x 14 / 2 x 18	3 x 14 / 2 x 18
	Rated Amps	A	4.8	4.8	4.8
Operation Range	ODU Operation Range Cooling	°F WB	14 to 118	14 to 118	14 to 118
	ODU Operation Range Heating	°F DB	4 to 64	4 to 64	4 to 64
Dimensions	IDU Dimensions (W x H x D)	in	21 x 55 ^{-3/16} x 21 ^{-3/8}	21 x 55 ^{-3/16} x 21 ^{-3/8}	21 x 55 ^{-3/16} x 21 ^{-3/8}
	ODU Dimensions (W x H x D)	in	37 ^{-13/32} x 32 ^{-27/32} x 13	37 ^{-13/32} x 54 ^{-11/32} x 13	37 ^{-13/32} x 54 ^{-11/32} x 13
Weight	IDU Weight (Net / Shipping)	lbs	134 / 147	134 / 147	148 / 162
	ODU Weight (Net / Shipping)	lbs	152.6 / 168.2	190.2 / 214.3	190.2 / 214.3
Unit Data	Airflow Rate Cooling (H / M / L)	CFM	1,225 / 1,100 / 1,000	1,400 / 1,200 / 1,070	1,750 / 1,580 / 1,400
	Airflow Rate Heating (H / M / L)	CFM	1,225 / 1,100 / 1,000	1,400 / 1,200 / 1,070	1,750 / 1,580 / 1,400
	Dehumidification	pts/hr	7.9	8.06	9.10
	Compressor Type		Twin Rotary x 1	Twin Rotary x 1	Twin Rotary x 1
Sound Pressure	Refrigerant Type		R-32	R-32	R-32
	Outdoor Max (Cool / Heat)	dB(A)	52 / 54	54 / 56	54 / 56
Piping	Liquid Pipe (Connection / Pipe Size)	in	³ / ₈ Flare / ³ / ₈ Braze	³ / ₈ Flare / ³ / ₈ Braze	³ / ₈ Flare / ³ / ₈ Braze
	Vapor Pipe (Connection / Pipe Size)	in	⁵ / ₈ Flare / ⁵ / ₈ Braze	⁵ / ₈ Flare / ⁵ / ₈ Braze	⁵ / ₈ Flare / ⁵ / ₈ Braze
	Pipe Length (Min / Max)	ft	16.4 / 164	16.4 / 164	16.4 / 164
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6
	Max Pipe Elevation	ft	98.4	98.4	98.4
	Pre Charge	Oz	77.6	105.8	105.8
	Additional Refrigerant	oz/ft	0.43	0.43	0.43
	Condensation Line (OD, ID)	in	³ / ₄	³ / ₄	³ / ₄
ENERGY STAR® / Cold Climate			No / No	No / No	No / No

A-Coil



Specification			18 kBtu/h	18 kBtu/h	24kBtu/h	30 kBtu/h
System			KSSMB18AA	KSSMB18BA	KSSMB24BA	KSSMB30BA
Indoor Unit			LKMMA18A1	LKMMA18B1	LKMMA24B1	LKMMA30B1
Outdoor Unit			KUSXB181A	KUSXB181A	KUSXB241A	KUSXB301A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	6,800-17,000-19,000	7,200-18,000-20,000	8,900-21,600-24,000	9,900-27,600-30,000
	Heating Capacity (Min-Rated-Max)	Btu/h	7,000-20,000-21,000	7,000-20,000-21,000	11,000-24,000-25,000	12,900-30,000-31,000
	Max Heating Capacity at 17 °F	Btu/h	17,600	17,600	22,000	26,400
	Max Heating Capacity at 5 °F	Btu/h	16,000	16,000	20,000	24,000
	Max Heating Capacity at -4 °F	Btu/h	14,900	14,900	17,600	21,800
	SEER2		15	15.2	15.2	15.0
	EER2		11.50	11.70	11.70	10.0
	HSPF2		8.1	8.1	8.5	8.3
COP at 47°F			3.20	3.20	3.14	3.10
Voltage (IDU)			V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
Power	Cooling Power Input (Min-Rated-Max)	kW	0.52-1.478-1.70	0.57-1.54-1.85	0.70-1.85-2.23	0.97-2.76-3.31
	Heating Power Input (Min-Rated-Max)	kW	0.55-1.83-2.01	0.53-1.83-2.01	0.74-2.24-2.46	0.94-2.84-3.07
	MCA / MOCP	A	16.0 / 25	16.0 / 25	16.0 / 25	19.1 / 30
	Power Communication Wiring	No. x AWG	3 x 12	3 x 12	3 x 12	3 x 10
	Rated Amps	A	1.6	1.6	1.6	1.6
Operation Range	ODU Operation Range Heating	°F WB	-4 to 64	-4 to 64	-4 to 64	-4 to 64
	ODU Operation Range Cooling	°F DB	5 to 118	5 to 118	5 to 118	5 to 118
Dimensions	IDU Dimensions (W x H x D)	in	14-1/2 x 24 x 21	17-1/2 x 24 x 21	17-1/2 x 24 x 21	17-1/2 x 26 x 21
	ODU Dimensions (W x H x D)	in	37-13/32 x 32-27/32 x 13			
Weight	IDU Weight (Net / Shipping)	lbs	44 / 49	46 / 52	46 / 52	54 / 60
	ODU Weight (Net / Shipping)	lbs	136 / 154.3	136 / 154.3	136 / 154.3	141.1 / 159.4
Unit Data	Airflow Rate (Max / H / M / L)	CFM	450 ~ 600	450 ~ 600	600 ~ 800	750 ~ 1,000
	Dehumidification	pts/hr	2.75	2.75	4.23	5.6
	Compressor Type		Twin Rotary	Twin Rotary	Twin Rotary	R1 Scroll
	Refrigerant Type		R-32	R-32	R-32	R-32
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	48 / 52	48 / 52	48 / 52	52 / 54
Piping	Liquid Pipe (Connection / Pipe Size)	in	3/8 Braze	3/8 Braze	3/8 Braze	3/8 Braze
	Vapor Pipe (Connection / Pipe Size)	in	3/4 Braze	3/4 Braze	3/4 Braze	3/4 Braze
	Outdoor Unit Piping Liquid (O.D.)	in	3/8 Flare	3/8 Flare	3/8 Flare	3/8 Flare
	Outdoor Unit Piping Vapor (O.D.)	in	5/8 Flare	5/8 Flare	5/8 Flare	5/8 Flare
	Pipe Length (Min / Max)	ft	16.4 / 164	16.4 / 164	16.4 / 164	16.4 / 164
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6
	Max Pipe Elevation	ft	98.4	98.4	98.4	98.4
	Pre Charge	Oz	4.2	4.2	4.2	4.2
	Additional Refrigerant	oz/ft	0.38	0.38	0.38	0.38
Drain (OD, ID)			in	1-1/4 / 1	1-1/4 / 1	1-1/4 / 1
ENERGY STAR® / Cold Climate			No / No	Yes / Yes	Yes / Yes	No / No

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

A-Coil

Specification			36 kBtu/h	36 kBtu/h	42 kBtu/h	48 kBtu/h	
		System	KSSMB36BA	KSSMB36CA	KSSMB42CA	KSSMB48CA	
		Indoor Unit	LKMMMA36B1	LKMMMA36C1	LKMMMA42C1	LKMMMA48C1	
		Outdoor Unit	KUSXB361A	KUSXB361A	KUSXB421A	KUSXB481A	
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	13,100-34,400-36,000	13,100-34,400-37,000	16,000-41,000-44,000	18,200-45,500-48,000	
	Heating Capacity (Min-Rated-Max)	Btu/h	15,200-37,000-38,000	15,200-37,000-38,000	18,100-43,000-45,000	18,100-43,000-45,000	
	Max Heating Capacity at 17 °F	Btu/h	35,500	35,500	39,200	41,000	
	Max Heating Capacity at 5 °F	Btu/h	24,000	32,000	36,000	38,000	
	Max Heating Capacity at -4 °F	Btu/h	29,100	29,100	32,000	33,800	
	SEER2		15.2	15.5	15.2	15.2	
	EER2		11.7	11.7	11.70	10.50	
	HSPF2		8.4	8.5	8.5	8.3	
		COP at 47°F	3.30	3.30	3.32	3.4	
		Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
Power	Cooling Power Input (Min-Rated-Max)	kW	1.03-2.94-3.27	1.03-2.94-3.47	1.23-3.51-3.89	1.56-4.34-4.72	
	Heating Power Input (Min-Rated-Max)	kW	0.92-3.29-3.55	1.12-3.29-3.55	1.29-3.80-4.10	1.45-4.14-4.47	
	MCA / MOCP	A	32 / 35	32 / 35	32 / 40	32 / 40	
	Power Communication Wiring	No. x AWG	3 x 10	3 x 10	3 x 10	3 x 10	
	Rated Amps	A	1.6 x 2	1.6 x 2	1.6 x 2	1.6 x 2	
Operation Range	ODU Operation Range Heating	°F WB	-4 to 64	-4 to 64	-4 to 64	-4 to 64	
	ODU Operation Range Cooling	°F DB	5 to 118	5 to 118	5 to 118	5 to 118	
Dimensions	IDU Dimensions (W x H x D)	in	17-1/2 x 26 x 21	21 x 26 x 21	21 x 30 x 21	21 x 30 x 21	
	ODU Dimensions (W x H x D)	in	37-13/32 x 54-11/32 x 13.0	37-13/32 x 54-11/32 x 13.0	37-13/32 x 54-11/32 x 13	37-13/32 x 54-11/32 x 13	
Weight	IDU Weight (Net / Shipping)	lbs	54 / 60	55 / 62	63 / 70	63 / 70	
	ODU Weight (Net / Shipping)	lbs	190.2 / 214.3	190.2 / 214.3	190.2 / 214.3	190.2 / 214.4	
Unit Data	Airflow Rate (Max / H / M / L)	CFM	840 ~ 1,200	840 ~ 1,200	1,050 ~ 1,400	1,200 ~ 1,600	
	Dehumidification	pts/hr	7.17	7.17	7.9	8.06	
	Compressor Type		R1 Scroll	R1 Scroll	R1 Scroll	R1 Scroll	
	Refrigerant Type		R-32	R-32	R-32	R-32	
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	52 / 54	52 / 54	52 / 54	52 / 54	
Piping	Liquid Pipe (Connection / Pipe Size)	in	3/8 Braze	3/8 Braze	3/8 Braze	3/8 Braze	
	Vapor Pipe (Connection / Pipe Size)	in	3/4 Braze	3/4 Braze	3/4 Braze	3/4 Braze	
	Outdoor Unit Piping Liquid (O.D.)	in	3/8 Flare	3/8 Flare	3/8 Flare	3/8 Flare	
	Outdoor Unit Piping Vapor (O.D.)	in	5/8 Flare	5/8 Flare	5/8 Flare	5/8 Flare	
	Pipe Length (Min / Max)	ft	16.4 / 246	16.4 / 246	16.4 / 246	16.4 / 246	
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6	
	Max Pipe Elevation	ft	98.4	98.4	98.4	98.4	
	Pre Charge	Oz	6.63 + 0.88	6.63 + 0.88	6.63 + 0.88	6.63 + 0.88	
	Additional Refrigerant	oz/ft	0.43	0.43	0.43	0.43	
		Drain (OD, ID)	in	1-1/4 / 1	1-1/4 / 1	1-1/4 / 1	
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes	Yes / Yes	No / Yes	

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

A-Coil



Specification			48 kBtu/h	48 kBtu/h	60 kBtu/h	60 kBtu/h	
System			KSSMB48DA	KSSMB49CA	KSSMB60CA	KSSMB60DA	
Indoor Unit			LKMMA48D1	LKMMA48C1	LKMMA60C1	LKMMA60D1	
Outdoor Unit			KUSXB481A	KUSXB601A	KUSXB601A	KUSXB601A	
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	18,200-45,500-49,000	18,200-45,500-48,000	20,000-52,500-55,000	20,000-52,500-56,000	
	Heating Capacity (Min-Rated-Max)	Btu/h	20,200-48,000-49,000	18,000-50,000-52,000	21,800-56,000-57,000	21,800-56,000-57,000	
	Max Heating Capacity at 17 °F	Btu/h	41,000	44,300	47,500	47,500	
	Max Heating Capacity at 5 °F	Btu/h	38,000	41,000	44,000	44,000	
	Max Heating Capacity at -4 °F	Btu/h	32,700	36,500	37,400	37,400	
	SEER2		15.5	15.9	15.2	15.5	
	EER2		11.00	11.70	10.50	10.70	
	HSPF2		8.5	8.9	8.5	9	
COP at 47°F			3.4	3.48	3.3	3.3	
Voltage (IDU)			V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
Power	Cooling Power Input (Min-Rated-Max)	kW	1.45-4.14-4.67	1.40-3.89-4.23	1.75-5.00-5.44	1.72-4.91-5.34	
	Heating Power Input (Min-Rated-Max)	kW	1.45-4.14-4.47	1.47-4.21-4.55	1.74-4.97-5.37	1.74-4.97-5.37	
	MCA / MOCP	A	32 / 40	32 / 40	32 / 40	32 / 40	
	Power Communication Wiring	No. x AWG	3 x 10	3 x 10	3 x 10	3 x 10	
	Rated Amps	A	1.6 x 2	1.6 x 2	1.6 x 2	1.6 x 2	
Operation Range	ODU Operation Range Heating	°F WB	-4 to 64	-4 to 64	-4 to 64	-4 to 64	
	ODU Operation Range Cooling	°F DB	5 to 118	5 to 118	5 to 118	5 to 118	
Dimensions	IDU Dimensions (W x H x D)	in	24-1/2 x 34 x 21	21 x 30 x 21	21 x 30 x 21	24-1/2 x 34 x 21	
	ODU Dimensions (W x H x D)	in	37-13/32 x 54-11/32 x 13				
Weight	IDU Weight (Net / Shipping)	lbs	73 / 82	63 / 70	63 / 70	73 / 82	
	ODU Weight (Net / Shipping)	lbs	190.2 / 214.5	213.4 / 232.4	213.4 / 232.4	213.4 / 232.4	
Unit Data	Airflow Rate (Max / H / M / L)	CFM	1,200 ~ 1,600	1,200 ~ 1,600	1,300 ~ 1,740	1,300 ~ 1,740	
	Dehumidification	pts/hr	8.06	8.06	8.8	8.8	
	Compressor Type		R1 Scroll	R1 Scroll	R1 Scroll	R1 Scroll	
	Refrigerant Type		R-32	R-32	R-32	R-32	
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	52 / 54	54 / 56	54 / 56	54 / 56	
Piping	Liquid Pipe (Connection / Pipe Size)	in	3/8 Braze	3/8 Braze	3/8 Braze	3/8 Braze	
	Vapor Pipe (Connection / Pipe Size)	in	3/4 Braze	3/4 Braze	3/4 Braze	3/4 Braze	
	Outdoor Unit Piping Liquid (O.D.)	in	3/8 Flare	3/8 Flare	3/8 Flare	3/8 Flare	
	Outdoor Unit Piping Vapor (O.D.)	in	3/8 Flare	3/4 Flare	3/4 Flare	3/4 Flare	
	Pipe Length (Min / Max)	ft	16.4 / 246	16.4 / 246	16.4 / 246	16.4 / 246	
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6	
	Max Pipe Elevation	ft	98.4	98.4	98.4	98.4	
	Pre Charge	Oz	6.63 + 0.88	7.50 + 0.88	7.50 + 0.88	7.50 + 0.88	
	Additional Refrigerant	oz/ft	0.43	0.43	0.43	0.43	
Drain (OD, ID)			in	1-1/4 / 1	1-1/4 / 1	1-1/4 / 1	
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes	No / Yes	No / Yes	

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

A-Coil with LGRED°

Specification			18 kBtu/h	18 kBtu/h	24kBtu/h	24 kBtu/h
<div style="display: flex; align-items: center;"> <div> <p>System</p> <p>Indoor Unit</p> <p>Outdoor Unit</p> </div> </div>			KSSMA18AA	KSSMA18BA	KSSMA24BA	KSSMA25BA
			LKMMA18A1	LKMMA18B1	LKMMA24B1	LKMMA24B1
			KUSXA181A	KUSXA181A	KUSXA241A	KUSXA301A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	6,800-17,000-19,000	7,200-18,000-20,000	8,900-21,600-24,000	9,000-23,000-24,000
	Heating Capacity (Min-Rated-Max)	Btu/h	7,000-20,000-22,000	7,000-20,000-22,000	11,000-24,000-26,000	11,000-26,000-28,000
	Max Heating Capacity at 17 °F	Btu/h	19,800	19,800	24,200	25,000
	Max Heating Capacity at 5 °F	Btu/h	18,000	18,000	22,000	24,000
	Max Heating Capacity at -4 °F	Btu/h	16,000	16,000	19,000	20,200
	Max Heating Capacity at -13 °F	Btu/h	14,000	14,000	16,500	18,000
	SEER2		15.2	15.2	15.0	15.5
	EER2		11.50	11.50	11.00	11.70
	HSPF2		8.1	8.1	8.6	8.8
COP at 47°F		3.26	3.26	3.2	3.46	
Power	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
	Cooling Power Input (Min-Rated-Max)	kW	0.52-1.48-1.70	0.58-1.57-1.88	0.75-1.96-2.38	0.75-1.97-2.38
	Heating Power Input (Min-Rated-Max)	kW	0.54-1.80-2.07	0.52-1.80-2.07	0.77-2.20-2.53	0.79-2.20-2.53
	MCA / MOCP	A	19.1 / 30	19.1 / 30	19.1 / 30	32 / 35
	Power Communication Wiring	No. x AWG	3 x 12	3 x 12	3 x 12	3 x 10
Operation Range	Rated Amps	A	1.6	1.6	1.6	1.6 x 2
	ODU Operation Range Heating	°F WB	-13 to 64	-13 to 64	-13 to 64	-13 to 64
Dimensions	ODU Operation Range Cooling	°F DB	5 to 118	5 to 118	5 to 118	5 to 118
	IDU Dimensions (W x H x D)	in	14- ¹ / ₂ x 24 x 21	17- ¹ / ₂ x 24 x 21	17- ¹ / ₂ x 24 x 21	17- ¹ / ₂ x 24 x 21
	ODU Dimensions (W x H x D)	in	37- ¹³ / ₃₂ x 32- ²⁷ / ₃₂ x 13	37- ¹³ / ₃₂ x 32- ²⁷ / ₃₂ x 13	37- ¹³ / ₃₂ x 32- ²⁷ / ₃₂ x 13	37- ¹³ / ₃₂ x 54- ¹¹ / ₃₂ x 13
Weight	IDU Weight (Net / Shipping)	lbs	44 / 49	46 / 52	46 / 52	46 / 52
	ODU Weight (Net / Shipping)	lbs	141.8 / 160.1	141.8 / 160.1	141.8 / 160.1	190.2 / 214.3
Unit Data	Airflow Rate (Max / H / M / L)	CFM	450 ~ 600	450 ~ 600	600 ~ 800	675 ~ 900
	Dehumidification	pts/hr	2.75	2.75	4.23	4.23
	Compressor Type		R1 Scroll	R1 Scroll	R1 Scroll	R1 Scroll
	Refrigerant Type		R-32	R-32	R-32	R-32
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	51 / 52	51 / 52	51 / 52	52 / 54
	Liquid Pipe (Connection / Pipe Size)	in	³ / ₈ Braze			
Piping	Vapor Pipe (Connection / Pipe Size)	in	³ / ₄ Braze			
	Outdoor Unit Piping Liquid (O.D.)	in	³ / ₈ Flare			
	Outdoor Unit Piping Vapor (O.D.)	in	⁵ / ₈ Flare			
	Pipe Length (Min / Max)	ft	16.4 / 164	16.4 / 164	16.4 / 164	16.4 / 246
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6
	Max Pipe Elevation	ft	98.4	98.4	98.4	98.4
	Pre Charge	Oz	4.2	4.2	4.2	6.3 + 0.88
	Additional Refrigerant	oz/ft	0.38	0.38	0.38	0.43
	Drain (OD, ID)	in	1- ¹ / ₄ / 1			
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes	No / No	Yes / Yes

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

A-Coil with LGRED°



Specification			30 kBtu/h	36 kBtu/h	36 kBtu/h	42 kBtu/h
<div style="display: flex; align-items: center;"> <div> <p>System</p> <p>Indoor Unit</p> <p>Outdoor Unit</p> </div> </div>			KSSMA30BA	KSSMA36BA	KSSMA36CA	KSSMA42CA
			LKMMMA30B1	LKMMMA36B1	LKMMMA36C1	LKMMMA42C1
			KUSXA301A	KUSXA361A	KUSXA361A	KUSXA422A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	11,100-30,000-31,000	13,000-34,400-36,000	13,000-34,400-37,000	16,000-41,000-44,000
	Heating Capacity (Min-Rated-Max)	Btu/h	13,000-32,000-35,000	15,000-37,000-38,000	15,000-37,000-38,000	18,000-45,000-47,000
	Max Heating Capacity at 17 °F	Btu/h	33,700	37,000	37,000	43,000
	Max Heating Capacity at 5 °F	Btu/h	30,600	33,000	33,000	41,000
	Max Heating Capacity at -4 °F	Btu/h	27,000	30,000	31,000	37,800
	Max Heating Capacity at -13 °F	Btu/h	23,000	26,000	27,000	33,000
	SEER2		15.7	15.5	16	16
	EER2		11.80	11.70	11.70	11.90
	HSPF2		8.8	8.9	8.9	8.9
	COP at 47°F		3.2	3.38	3.38	3.46
Power	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
	Cooling Power Input (Min-Rated-Max)	kW	0.89-2.54-3.05	1.03-2.94-3.27	1.03-2.94-3.47	1.21-3.45-3.82
	Heating Power Input (Min-Rated-Max)	kW	0.97-2.93-3.34	1.06-3.21-3.63	1.09-3.21-3.63	1.30-3.81-4.31
	MCA / MOCP	A	32 / 35	32 / 35	32 / 35	32 / 40
	Power Communication Wiring	No. x AWG	3 x 10	3 x 10	3 x 10	3 x 10
	Rated Amps	A	1.6 x 2	1.6 x 2	1.6 x 2	1.6 x 2
Operation Range	ODU Operation Range Heating	°F WB	-13 to 64	-13 to 64	-13 to 64	-13 to 64
	ODU Operation Range Cooling	°F DB	5 to 118	5 to 118	5 to 118	5 to 118
Dimensions	IDU Dimensions (W x H x D)	in	17 ^{-1/2} x 26 x 21	17 ^{-1/2} x 26 x 21	21 x 26 x 21	21 x 30 x 21
	ODU Dimensions (W x H x D)	in	37 ^{-13/32} x 54 ^{-11/32} x 13			
Weight	IDU Weight (Net / Shipping)	lbs	54 / 60	54 / 60	55 / 62	63 / 70
	ODU Weight (Net / Shipping)	lbs	190.2 / 214.3	190.2 / 214.3	190.2 / 214.3	213.4 / 232.4
Unit Data	Airflow Rate (Max / H / M / L)	CFM	750 ~ 1,000	840 ~ 1,200	840 ~ 1,200	1,050 ~ 1,400
	Dehumidification	pts/hr	5.6	7.17	7.17	7.9
	Compressor Type		R1 Scroll	R1 Scroll	R1 Scroll	R1 Scroll
	Refrigerant Type		R-32	R-32	R-32	R-32
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	52 / 54	52 / 54	52 / 54	54 / 56
Piping	Liquid Pipe (Connection / Pipe Size)	in	³ / ₈ Braze			
	Vapor Pipe (Connection / Pipe Size)	in	³ / ₄ Braze			
	Outdoor Unit Piping Liquid (O.D.)	in	³ / ₈ Flare			
	Outdoor Unit Piping Vapor (O.D.)	in	⁵ / ₈ Flare			
	Pipe Length (Min / Max)	ft	16.4 / 246	16.4 / 246	16.4 / 246	16.4 / 246
	Piping Length (no add'l refrigerant)	ft	24.6	24.6	24.6	24.6
	Max Pipe Elevation	ft	98.4	98.4	98.4	98.4
	Pre Charge	Oz	6.3 + 0.88	6.3 + 0.88	6.3 + 0.88	7.50 + 0.88
	Additional Refrigerant	oz/ft	0.43	0.43	0.43	0.43
Drain (OD, ID)	in	1 ^{-1/4} / 1	1 ^{-1/4} / 1	1 ^{-1/4} / 1	1 ^{-1/4} / 1	
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes

Visit LGHVAC for more information. Product specifications may be changed or modified from time to time by LG in its sole discretion.

A-Coil with LGRED°

Specification			48 kBtu/h	48 kBtu/h
<div style="display: flex; align-items: center;"> <div> <p>System</p> <p>Indoor Unit</p> <p>Outdoor Unit</p> </div> </div>			KSSMA48CA	KSSMA48DA
			LKMMMA48C1	LKMMMA48D1
			KUSXA482A	KUSXA482A
Capacity	Cooling Capacity (Min-Rated-Max)	Btu/h	18,000-45,500-48,000	18,000-45,500-49,000
	Heating Capacity (Min-Rated-Max)	Btu/h	18,000-50,000-52,000	20,000-50,000-52,000
	Max Heating Capacity at 17 °F	Btu/h	45,000	46,000
	Max Heating Capacity at 5 °F	Btu/h	43,000	43,000
	Max Heating Capacity at -4 °F	Btu/h	39,000	40,000
	Max Heating Capacity at -13 °F	Btu/h	34,000	35,000
	SEER2		15.9	16.1
	EER2		11.70	11.70
Power	HSPF2		8.9	9.1
	COP at 47°F		3.48	3.48
	Voltage (IDU)	V, Hz, Ø	208-230 / 60 / 1	208-230 / 60 / 1
	Cooling Power Input (Min-Rated-Max)	kW	1.40-3.89-4.23	1.36-3.89-4.39
	Heating Power Input (Min-Rated-Max)	kW	1.35-4.21-4.76	1.47-4.21-4.76
	MCA / MOCP	A	32 / 40	32 / 40
	Power Communication Wiring	No. x AWG	3 x 10	3 x 10
	Rated Amps	A	1.6 x 2	1.6 x 2
Operation Range	ODU Operation Range Heating	°F WB	-13 to 64	-13 to 64
	ODU Operation Range Cooling	°F DB	5 to 118	5 to 118
Dimensions	IDU Dimensions (W x H x D)	in	21 x 30 x 21	24- ¹ / ₂ x 34 x 21
	ODU Dimensions (W x H x D)	in	37- ¹³ / ₃₂ x 54- ¹¹ / ₃₂ x 13	37- ¹³ / ₃₂ x 54- ¹¹ / ₃₂ x 13
Weight	IDU Weight (Net / Shipping)	lbs	63 / 70	73 / 82
	ODU Weight (Net / Shipping)	lbs	213.4 / 232.4	213.4 / 232.4
Unit Data	Airflow Rate (Max / H / M / L)	CFM	1,200 ~ 1,600	1,200 ~ 1,600
	Dehumidification	pts/hr	8.06	8.06
	Compressor Type		R1 Scroll	R1 Scroll
	Refrigerant Type		R-32	R-32
Sound Pressure	Outdoor Max (Cool / Heat)	dB(A)	54 / 56	54 / 56
Piping	Liquid Pipe (Connection / Pipe Size)	in	³ / ₈ Braze	³ / ₈ Braze
	Vapor Pipe (Connection / Pipe Size)	in	³ / ₄ Braze	³ / ₄ Braze
	Outdoor Unit Piping Liquid (O.D.)	in	³ / ₈ Flare	³ / ₈ Flare
	Outdoor Unit Piping Vapor (O.D.)	in	⁵ / ₈ Flare	⁵ / ₈ Flare
	Pipe Length (Min / Max)	ft	16.4 / 246	16.4 / 246
	Piping Length (no add'l refrigerant)	ft	24.6	24.6
	Max Pipe Elevation	ft	98.4	98.4
	Pre Charge	Oz	7.50 + 0.88	7.50 + 0.88
	Additional Refrigerant	oz/ft	0.43	0.43
Drain (OD, ID)	in	1- ¹ / ₄ / 1	1- ¹ / ₄ / 1	
ENERGY STAR® / Cold Climate			Yes / Yes	Yes / Yes



LG Electronics USA, Inc.

Air Conditioning Technologies

4300 North Point Parkway, Alpharetta, GA 30022

www.LGHVAC.com

Visit [LGHVAC.com](http://www.LGHVAC.com) for more information. Product specifications may be changed or modified from time to time by LGEUS in its sole discretion.

Legal Disclaimer: All material provided herein is for informational or educational purposes only. It is not intended to be a substitute for professional advice. Please consult with your contractor, engineer or design professionals for application to your system. For continual product development, LG Electronics U.S.A., Inc., reserves the right to change specifications without notice. For more technical materials such as submittals, engineering manuals, and catalogs, visit www.lghvac.com. The information provided about third party products, references to third party brands, and links to third party websites is for informational purposes only and does not constitute an endorsement or recommendation, or any offer or solicitation to buy or sell any third-party services or products of any kind.

Proprietary Data Notice: This document, as well as all reports, illustrations, data, information, and other materials contained herein contain LG confidential and proprietary information and are disclosed only in confidence.

LG, the LG logo, LG Life's Good, LGRED®, LG ThinQ are trademarks of LG Corp. Amazon Alexa is a trademark of Amazon.com, Inc. Apple is a trademark of Apple Inc. Google Assistant is a trademark of Google LLC. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. International Code Council and International Energy Conservation Code are trademarks of the International Code Council, Inc. All other trademarks are the property of their respective owners.

© LG Electronics USA, Inc. ALL RIGHTS RESERVED.